High Voltage Radial Leaded Capacitors

Military & Commercial Level NPO & X7R – 500 Vdc to 10 kVdc

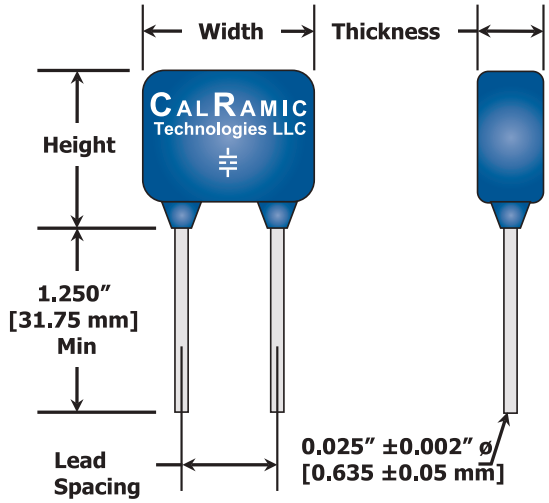

Lead Type: #22 AWG, CCFE / Solder plate
RoHS Option – 100% Tin plate

CalRamic Technologies LLC manufactures a series of highly reliable, military / commercial grade high voltage, radial leaded ceramic capacitors that are designed specifically for those conditions where the assembly may be exposed to high levels of thermal and / or mechanical shock. In addition, these assemblies are packaged in a high resistance conformal coating that provides enhanced electrical isolation and added environmental protection.

Intended for continuous operation at full rated voltage and across the entire operating temperature range, these capacitors utilize a special internal design specifically intended to reduce electric field stresses, thereby providing a device that exhibits very low ESR characteristics and no reduction in insulation resistance with life.

Available with ultra-stable Class I, NPO and stable Class II, X7R dielectric materials, these capacitors are ideally suited for timing / precision circuitry, energy storage, DC blocking, snubbers, transient suppression, decoupling, resonators and EMI filtering applications.

Performance Characteristics

Specification	Dielectric Type (EIA Designation)	
	NPO (COG)	X7R
Material Classification	Type I, Ultra Stable, K90	Type II, Stable, K2500
Coefficient of Thermal Expansion	9 x 10^{-6} / °C	11 x 10^{-6} / °C
Density	67 g / in^3	
Operating Temperature Range	-55 to +125°C	
Aging Rate	0	-2% Max per decade hour
Temperature Coefficient	±30 PPM / °C	±15%
Voltage Coefficient	Negligible	Range -35% to -55% Max @ WVDC
Capacitance Range	10 pF to 0.33 µF	150 pF to 5.6 µF
Voltage Range	500 VDC to 10 kVDC	
Insulation Resistance @ +25°C	100,000 MΩ or 1000 MΩ - µF, W/E is less	
Insulation Resistance @ +125°C	10,000 MΩ or 100 MΩ - µF, W/E is less	
Dissipation Factor	0.1% Max	2.5% Max
DWV	1.5 X WVDC ≤ 1250 Vdc or 1.2 X WVDC > 1250 Vdc	

Mechanical Dimensions

Dimensions inches [mm]	Product Style												
	HV01	HV02	HV03	HV10	HV04	HV11	HV05	HV06	HV07	HV13	HV14	HV15	HV16
Width - Max	0.250 [6.35]	0.320 [8.13]	0.370 [9.40]	0.450 [11.43]	0.470 [11.94]	0.550 [13.97]	0.570 [14.48]	0.670 [17.02]	0.770 [19.56]	0.850 [21.59]	1.050 [26.67]	1.250 [31.75]	1.450 [36.83]
Height - Max	0.220 [5.59]	0.280 [7.11]	0.300 [7.62]	0.220 [5.59]	0.400 [10.16]	0.280 [7.11]	0.500 [12.70]	0.600 [15.24]	0.720 [18.29]	0.400 [10.16]	0.500 [12.70]	0.600 [15.24]	0.720 [18.29]
Thickness - Max	0.200 [5.08]	0.250 [6.35]	0.250 [6.35]	0.200 [5.08]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]	0.270 [6.86]
Lead Spacing ±0.030 [0.762]	0.170 [4.32]	0.220 [5.59]	0.275 [6.99]	0.300 [7.62]	0.375 [9.53]	0.400 [10.16]	0.475 [12.07]	0.575 [14.61]	0.675 [17.15]	0.700 [17.78]	0.975 [24.77]	1.175 [29.85]	1.300 [33.02]

High Voltage Radial Leaded Capacitors

Military & Commercial Level NPO & X7R – 500 Vdc to 10 kVdc

Electrical Characteristics

NPO Capacitance Range														
Style		HV01	HV02	HV03	HV04	HV05	HV06	HV07	HV10	HV11	HV13	HV14	HV15	HV16
Min Cap		120	220	270	270	180	270	470	100	100	120	180	330	560
WVDC	500	472	822	103	223	563	823	104	153	273	124	154	224	334
	1000	152	392	682	183	333	473	683	472	103	683	563	104	154
	2000	681	821	122	332	682	103	223	102	222	103	153	223	253
	3000	151	561	681	152	392	682	822	391	821	472	562	153	183
	4000	•	•	•	681	152	222	392	221	561	152	332	562	822
	5000	•	•	•	•	102	222	272	•	391	122	222	392	562
	7000	•	•	•	•	•	•	•	•	•	471	102	182	272
	10000	•	•	•	•	•	•	•	•	•	•	821	122	222

*Voltages >10kVdc available – Contact Factory

X7R Capacitance Range														
Style		HV01	HV02	HV03	HV04	HV05	HV06	HV07	HV10	HV11	HV13	HV14	HV15	HV16
Min Cap		271	561	681	271	471	681	122	151	271	221	471	821	122
WVDC	500	823	184	224	564	125	185	255	224	394	155	225	395	565
	1000	223	683	823	274	474	684	105	563	154	684	*105*	155	225
	2000	392	123	183	333	683	104	184	822	223	823	154	254	334
	3000	•	392	562	153	333	393	823	222	822	273	563	823	124
	4000	•	•	•	682	103	153	273	122	472	123	273	473	683
	5000	•	•	•	•	682	103	153	•	272	822	223	273	393
	7000	•	•	•	•	•	•	•	•	•	332	682	103	183
	10000	•	•	•	•	•	•	•	•	•	•	392	562	103

*Voltages >10kVdc available – Contact Factory

Notes

1. Product designed and manufactured to be drop-in replacements for DSCC HV designs.
2. Group A screening available to MIL-PRF-49467.
3. Special testing including Ultrasound (C-SAM) and Partial Discharge (Corona) is available. See Space Level HS catalog CRT-0009 for more information.
4. Custom voltages, package sizes and capacitance values available. Contact factory.
5. X7R dielectrics are not intended for AC line filtering applications.
6. Large ceramic capacitors, even leaded devices are susceptible to damage when exposed to thermal and / or mechanical shock. Refer to Technical Bulletin AN103/AN112 for handling and installation recommendations.
7. High voltage products may require additional conformal coating to prevent possible arc over.

Part Number / Ordering Information

20	HV03	B	562	K	M	R

Voltage
05 = 500 Vdc
20 = 2000 Vdc
100 = 10 kVdc

Style
HV03
- Reference table

Dielectric
B = X7R
N = NPO

Capacitance
Value in pF
- Two significant figures, plus number of zeros
562 = 5600 pF
104 = 100,000 pF

Tolerance
J = ±5%, NPO only
K = ±10%
M = ±20%
P = -0 / +100%
Z = -20 / +80%

Screening
M = Group A
- Excludes Partial Discharge (Corona)

RoHS
R = RoHS if Required

Note: Group A and RoHS compliance is not included unless designated in part number

High Voltage Radial Leaded Capacitors

Military & Commercial Level NPO & X7R – 500 Vdc to 10 kVdc

MADE IN USA

A

Performance Charts (Typical)

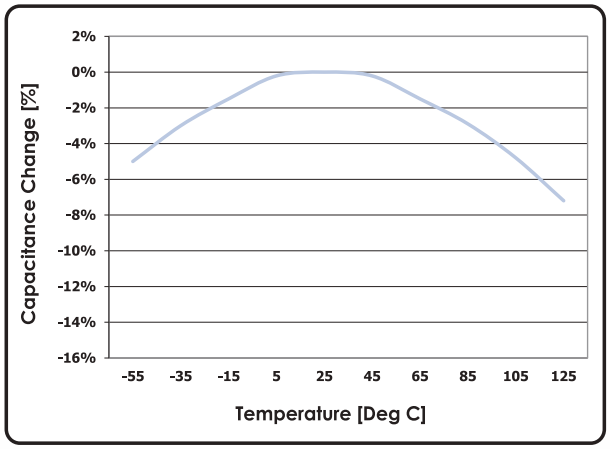

X7R Temperature Coefficient

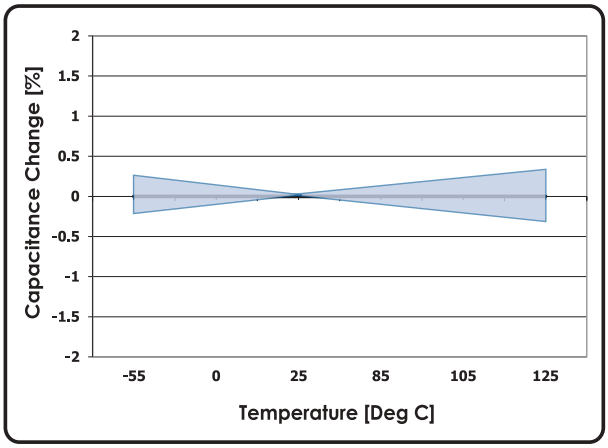

NPO Temperature Coefficient

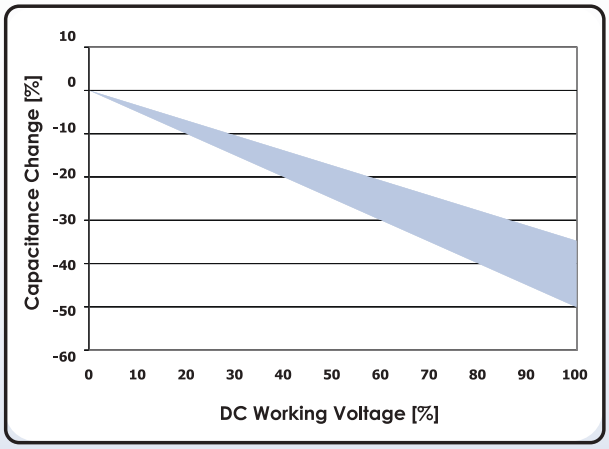

X7R Voltage Coefficient

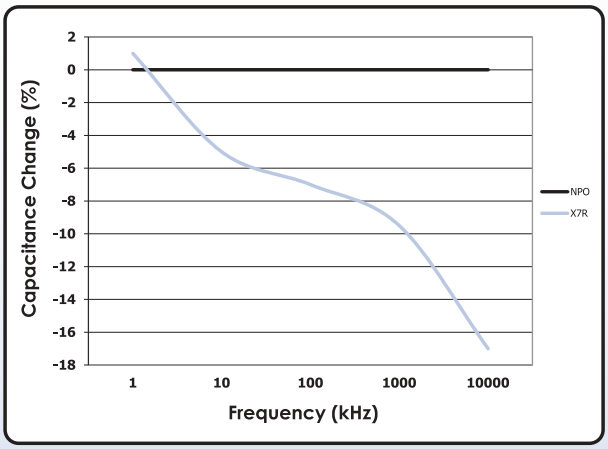

Capacitance Vs Frequency

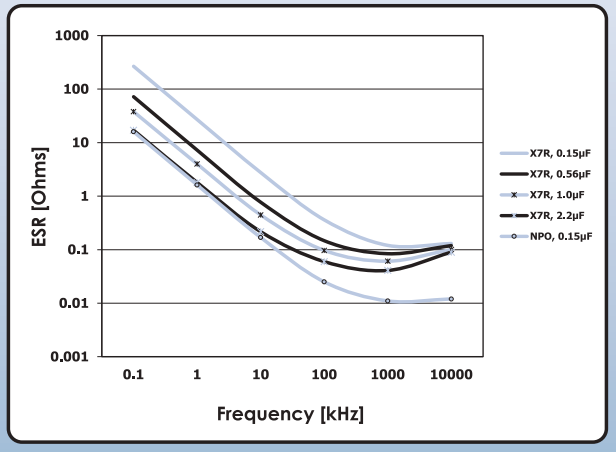

ESR Vs Frequency

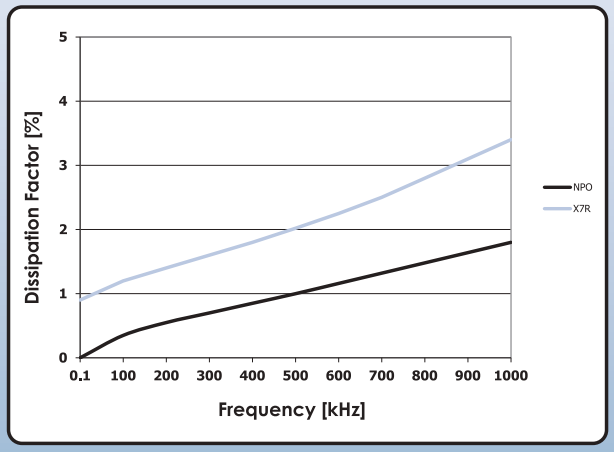

DF Vs Frequency

Partnering with our clients for combined success.

ISO 9001:2015 CERTIFIED QUALITY MANAGEMENT SYSTEM

MADE IN USA

CalRamic Technologies LLC manufactures High Voltage Ceramic Capacitors. All of our products are manufactured in the United States. Applications of our products are Space Level, Military Aircraft and Ground Based Systems, Commercial Aerospace, SMPS, Medical Imaging, High Temperature (Geophysical and Geothermal), Pulse Discharge and High Repetition Rate, and a variety of commercial and industrial applications.

Our products range from Radial Leaded Multilayer and Disc to Surface Mount Chip capacitors in a variety of dielectrics to suit your application. We can produce large or small production quantities. Our lean manufacturing process and discipline offer the shortest lead times in the industry with out-of-stock same day delivery.

We also offer our “Fast Track” delivery for those special delivery needs. Custom designs and variations are welcome.

MADE IN USA

BASIC APPLICATIONS

It is the basic ability of a capacitor to store energy for controlled release that makes it an extremely valuable tool for use in a wide range of applications in the electronics industry. Typical applications would include:

Energy / Pulse Discharge

The energy stored in the capacitor can be discharged for use in an ignition, firing or triggering circuit or as a power source.

Direct Current Blockage

A fully charged capacitor acts as a high impedance device and can block the passage of DC current while still allowing AC current to pass to a specified portion of the circuit.

Coupling of Circuit Components

With the ability to pass AC signals, a capacitor is able to couple one section of an AC circuit to another circuit.

Decoupling of Circuit Components

Capacitors are often used in integrated circuits (IC's) to minimize noise in the logic signal by providing an additional current source.

Filter Capacitors

The reactance of a capacitor is inversely proportional to the frequency thereby offering decreased resistance to current flow at higher frequency levels. This ability to decrease or increase the impedance of the circuit allows the capacitor to discriminate and filter out undesired frequencies.

By-Pass Capacitor

The ability to block DC current and allow the passage of AC current permits the capacitor to be placed in parallel with other components to by-pass the AC at a certain frequency without allowing the DC component of the signal to pass.

Snubber Capacitors

Capacitors can be used to protect sensitive components in a circuit by limiting the energy associated with high voltage transients generated by the opening of relays or silicon controlled rectifiers (SCR) used to drive high inductance loads.

Switch Mode Power Supply

For applications including input and output filters for switch mode power supplies, DC to DC converters, decoupling, snubbers, energy storage and high capacitance discharge circuits.
See pages 27 & 49 for more information.

CalRamic Technologies LLC is an ISO9001-2015 Certified facility. Our commitment to Quality is our primary objective and we pride ourselves on our satisfaction to our client base. Our Goal is to provide the upmost Quality from the initial contact in introducing our company, to quoting the same day if possible, followed by offering short deliveries coupled with “on time deliveries” of our products. And of course, what we consider the most important element, the reliability of the components in the application once delivered. In addition, we remain dynamic and open to our customer’s inputs so we may continue to improve in all aspects related to our chosen field. We continue to grow at a substantial rate and believe that is in direct response to maintaining the Quality Objectives stated above.

42 °C
NEW ELEMENTS 10/9

MORE ABOUT US

CalRamic Technologies LLC is a U.S.-based High Voltage Ceramic Capacitor manufacturer with over 20 years' experience. Our team focuses on producing exceptional quality capacitors by using superior quality materials with a highly trained team.

CalRamic produces a variety of components in a multitude of configurations ranging from 500VDC to 80KVDC. Our Lean Manufacturing principles provide shorter lead times, rapid prototype turnaround deliveries, multiple design derivations for your custom application, and a variety of dielectric types depending on your specific application.

Our quality control system conforms to and exceeds ISO 9001-2015 requirements. We manufacture capacitors suitable for a wide range of applications like: Geothermal, Commercial/Industrial, Medical, Commercial Aerospace, Ground Based Military, Military Aerospace and even Hi-Reliability Space Satellite Systems. Our manufacturing design guidelines, material choices, and precision controls result in performance-based High Voltage Capacitors for your specific application.

The CalRamic Technologies Leadership has created a culture that encourages personal growth and success for each team member, while building a We Succeed as a Team environment. In addition, we look for opportunities to support our local community through non-profit involvement and CalRamic Team events throughout the year.

We are committed to the best approaches and practices that limit environmental impact, and an extensive safety and awareness training program that limits hazardous exposures to our Team Members.

CalRamic Technologies LLC is fully committed to our clients' success. On our website we offer a full ceramic capacitor educational library with Application Notes and Product Training Modules that help our clients understand the technical nature of High Voltage Ceramic Capacitors.

We are fully committed to your application's success.

Jeff Day

5462 Louie Lane, Reno, Nevada 8951 • USA
Tel.: +1 775 851-3580

info@calramic.com
www.calramic.com

Exxelia Headquarters
204 rond-point du Pont de Sèvres
92100 BOULOGNE BILLANCOURT • FRANCE
Tel.: +33 1 49 23 10 00

www.exxelia.com

OTHER SALES OFFICES

AMERICAS

USA, Florida
1221 N. Highway 17-92,
Longwood, FL 32750 • USA
Tel.: +1 407 695-6562

USA, New York
93 Paper Mill Street,
Honeoye Falls, NY 14472 • USA
Tel.: +1 585 624-2610

For all requests
exxelia.com/en/contact

EUROPE

Western Europe
93, rue Oberkampf
75011 PARIS • FRANCE
Tel.: +33 1 49 23 10 00

Northern Europe
Cylindervägen 18
SE-131 52 Nacka Strand • SWEDEN
Tel.: +46 76 16 50 014

APAC

India
Level 7, Mfar Greenheart,
Manyata Tech Park
Outer Ring Road, Hebbal,
BANGALORE - 560045
Tel.: +91 80 67 65 41 14

China
Mayfair Tower NO.83
Fu Min Road - 200040 Shanghai • CHINA
Tel.: +86 21 6132 7197