

# CT4 CT4E

Wet tantalum capacitors  
Epoxy sealed silver cases  
Axial leads  
Polarized




## ELECTRICAL AND CLIMATIC CHARACTERISTICS

	CT4	CT4E
Detail specification	According to CECC 30202-003	According to BS 9073 F008 (CT4E/69F) BS 9073 F032 (CT4E/69FE)
Operating temperature	-55°C +125°C	-55°C +125°C
Damp heat	56 days	56 days
Capacitance range	4,7µF ⇒ 1000µF	1,7µF ⇒ 2200µF
Tolerance	±10% - ±20%	±10% - ±20%
Voltage range	10V ⇒ 125V	6,3V ⇒ 150V
Max. capacitance change -55°C	see table	see table
Max. capacitance change +85°C	see table	see table
Max. capacitance change +125°C	see table	see table
Maximum DF at +20°C	see table	see table
Maximum DF at +85°C	= lim20°C	= lim20°C
Maximum DF at +125°C	= lim20°C	= lim20°C
Max. impedance (100Hz) at -55°C	see table	see table
Max. leakage current at +20°C	see table	see table
Max. leakage current at +85°C	see table	see table
Max. leakage current at +125°C	1,6 x lim+85°C	1,6 x lim+85°C
Max. ripple current 100kHz +85°C	see table	see table
Reverse voltage	No	No
Max. surge voltage at +85°C	1,15 x U <sub>R</sub>	1,15 x U <sub>R</sub>
Max. surge voltage at +125°C	1,15 x U <sub>C</sub>	1,15 x U <sub>C</sub>

## DIMENSIONS (mm)

Case code	Dimensions with insulating sleeve		
	L max	D max	d +10% -0,05
A	17	5,8	0,6
B	19	7,4	0,6
C	23	10,1	0,6
D	28	10,1	0,6

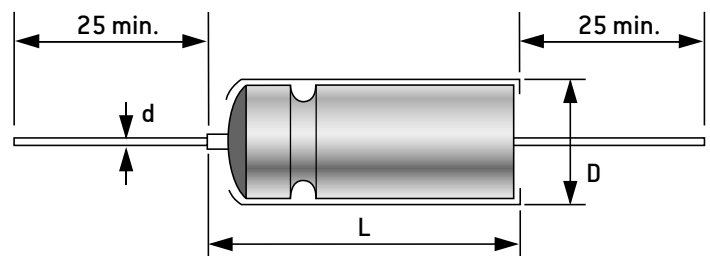

**MARKING, PACKAGING, CONSTRUCTION:**  
see general characteristics

## HOW TO ORDER

Commercial description	Model		Case	Capacitance in µF	Tolerance in %	DC Voltage	Termination	
	CT4	CT4E		120µF	20%	100V	H	
EXXELIA PN	Model code		Case	Capacitance code	Tolerance code	DC Voltage code	Termination	
	TS47	TS47E		D	127	M	100	A
				Expressed in pF with 3 digits: 2 digits for the value and the third for the multiplier	K = 10% M = 20%	Expressed in volt with 3 digits	Commercial description H = SnPb (non RoHS) - = Sn100% (RoHS)	EXXELIA PN A = SnPb (non RoHS) F = Sn100% (RoHS)

CT4

[Standard range]

## STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100Hz +20°C ( $\mu$ F)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance 100Hz -55°C ( $\Omega$ )	Max. I leak		I <sub>rms</sub> Max. 100kHz +85°C (mA)
			-55°C (%)	+85°C (%)	+125°C (%)			+20°C ( $\mu$ A)	+85°C ( $\mu$ A)	
<b>Rated voltage (+85°C) 10 V - Category voltage (+125°C) 6,3 V</b>										
47	A	CT4	-60	+12	+15	32	125	1	5	80
150	B	CT4	-60	+12	+15	36	100	2	10	250
470	C	CT4	-70	+12	+15	45	80	5	25	500
1000	D	CT4	-70	+20	+25	80	50	8	40	850
<b>Rated voltage (+85°C) 16 V - Category voltage (+125°C) 10 V</b>										
33	A	CT4	-50	+12	+15	29	125	1	5	80
100	B	CT4	-50	+12	+15	32	100	2	10	250
330	C	CT4	-60	+12	+15	40	90	5	25	500
680	D	CT4	-70	+20	+25	65	75	8	40	800
<b>Rated voltage (+85°C) 25 V - Category voltage (+125°C) 16 V</b>										
22	A	CT4	-50	+12	+15	22	175	1	5	80
68	B	CT4	-50	+12	+15	27	125	2	10	250
180	C	CT4	-60	+12	+15	32	100	5	25	500
390	D	CT4	-70	+20	+25	50	90	8	40	850
<b>Rated voltage (+85°C) 40 V - Category voltage (+125°C) 25 V</b>										
12	A	CT4	-25	+8	+10	20	400	1	5	60
39	B	CT4	-25	+8	+10	24	125	2	10	250
120	C	CT4	-50	+8	+10	32	100	5	25	500
270	D	CT4	-60	+16	+20	50	90	8	40	820
<b>Rated voltage (+85°C) 63 V - Category voltage (+125°C) 40 V</b>										
8,2	A	CT4	-25	+8	+10	16	400	1	5	60
27	B	CT4	-25	+8	+10	24	175	2	10	250
82	C	CT4	-40	+8	+10	26	125	5	25	500
150	D	CT4	-40	+16	+20	45	100	8	40	750
<b>Rated voltage (+85°C) 100 V - Category voltage (+125°C) 63 V</b>										
5,6	A	CT4	-20	+8	+10	15	500	1	5	60
15	B	CT4	-20	+8	+10	20	300	2	10	250
56	C	CT4	-40	+8	+10	24	125	5	25	500
120	D	CT4	-40	+15	+17	42	100	8	40	750
<b>Rated voltage (+85°C) 110 V - 125 V - Category voltage (+125°C) 80 V</b>										
4,7	A	CT4	-15	+8	+10	15	550	1	5	50
12	B	CT4	-15	+8	+10	15	400	2	10	250
39	C	CT4	-40	+8	+10	18	125	5	25	500
82	D	CT4	-40	+12	+15	40	100	8	40	750

[Extended range]

CT4E

## STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100Hz +20°C ( $\mu$ F)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance 100Hz -55°C ( $\Omega$ )	Max. I leak		Irms Max. 100kHz +85°C (mA)
			-55°C (%)	+85°C (%)	+125°C (%)			+20°C ( $\mu$ A)	+85°C ( $\mu$ A)	
<b>Rated voltage (+85°C) 6 V - 6,3 V - Category voltage (+125°C) 4 V</b>										
27	A	CT4E	-50	+15	+15	9	110	1	2	130
30	A	CT4E - 69F	-40	+12	+12	8	100	1	2	140
68	A	CT4E - 69F	-40	+16	+16	18	59	1	2	160
120	B	CT4E	-50	+20	+20	18	48	1	3	330
140	B	CT4E - 69F	-40	+16	+16	18	40	1	3	330
200	A	CT4E	-58	+13	+13	40	25	2	9	180
220	A	CT4E - 69FE	-65	+16	+16	40	22	2	9	90
270	B	CT4E - 69F	-44	+20	+20	70	25	1	7	270
290	C	CT4E	-70	+20	+20	45	24	2	7	410
330	C	CT4E - 69F	-40	+16	+16	43	22	2	8	410
560	B	CT4E - 69FE	-80	+20	+20	42	21	3	14	210
560	C	CT4E - 69F	-64	+20	+20	110	25	2	13	340
820	B	CT4E - 69FE	-80	+20	+20	68	20	3	14	280
1000	D	CT4E	-80	+25	+25	100	20	3	14	530
1200	C	CT4E - 69FE	-85	+25	+25	82	20	5	20	510
1200	D	CT4E - 69F	-80	+25	+25	60	20	3	12	530
1500	C	CT4E - 69FE	-85	+20	+25	82	10	5	20	540
1800	D	CT4E - 69FE	-80	+25	+25	72	16	7	25	650
2200	D	CT4E - 69FE	-80	+20	+25	80	15	9	30	800
<b>Rated voltage (+85°C) 8 V - Category voltage (+125°C) 5 V</b>										
22	A	CT4E	-50	+15	+15	7	115	1	2	130
25	A	CT4E - 69F	-40	+12	+12	7	100	1	2	140
56	A	CT4E - 69F	-40	+12	+12	15	60	1	2	160
100	B	CT4E	-50	+20	+20	32	52	1	3	330
120	B	CT4E	-50	+20	+20	40	48	1	4	330
180	A	CT4E - 69FE	-54	+13	+16	36	28	2	9	180
220	B	CT4E - 69F	-44	+20	+20	57	30	1	7	270
260	C	CT4E	-70	+20	+20	60	37	2	8,5	410
290	C	CT4E	-70	+20	+20	55	24	2	9,5	410
430	B	CT4E - 69FE	-80	+20	+20	42	20	3	14	280
430	C	CT4E - 69F	-64	+20	+20	84	25	2	14	340
620	B	CT4E - 69FE	-80	+20	+20	53	17	3	14	290
680	B	CT4E - 69FE	-80	+20	+20	55	15	3	14	300
850	C	CT4E - 69FE	-80	+25	+25	65	25	4	16	430
850	D	CT4E - 69F	-80	+25	+25	50	22	4	16	670
1200	C	CT4E - 69FE	-80	+25	+25	82	13	5	20	460
1400	C	CT4E	-85	+20	+25	84	11	5	20	480
1600	D	CT4E - 69FE	-80	+25	+25	68	18	7	25	650
1800	D	CT4E - 69FE	-80	+25	+25	70	16	8	28	670
<b>Rated voltage (+85°C) 10 V - Category voltage (+125°C) 6,3 V</b>										
18	A	CT4E	-40	+15	+15	5	130	1	2	130
20	A	CT4E - 69F	-32	+12	+12	5	120	1	2	140
47	A	CT4E - 69F	-36	+16	+16	15	90	1	2	160
85	B	CT4E	-45	+20	+20	13	61	1	3,5	270
100	A	CT4E - 69FE	-50	+16	+16	15	60	1	4	160
100	B	CT4E - 69F	-36	+16	+16	13	60	1	4	270
120	A	CT4E - 69FE	-45	+13	+16	32	35	2	9	160
140	A	CT4E - 69FE	-50	+16	+16	32	40	2	9	160
150	A	CT4E - 69FE	-50	+16	+16	32	40	2	9	90
180	B	CT4E - 69F	-36	+16	+16	46	40	1	7	270
220	C	CT4E	-60	+20	+20	30	40	2	9	410
250	C	CT4E - 69F	-40	+16	+16	32	35	2	10	410
330	C	CT4E	-64	+20	+20	75	25	2	16	340
390	C	CT4E - 69F	-64	+20	+20	75	25	2	16	340
470	B	CT4E - 69FE	-65	+16	+20	35	16	3	16	300
510	B	CT4E - 69FE	-70	+20	+20	45	15	3	16	300
560	B	CT4E - 69FE	-70	+20	+20	50	21	3	16	280
680	D	CT4E	-72	+25	+30	32	19	8	32	610
750	C	CT4E - 69FE	-75	+25	+25	67	22	5	20	410
750	D	CT4E - 69F	-80	+25	+25	44	23	4	16	670
1000	C	CT4E - 69FE	-75	+20	+25	67	12	5	20	470
1200	C	CT4E	-75	+20	+25	82	12	5	20	540
1200	D	CT4E	-75	+30	+30	60	18	8	32	670
1300	D	CT4E - 69FE	-75	+25	+25	63	17	7	25	670
1500	D	CT4E - 69FE	-75	+25	+25	66	17	8	28	800

**CT4E****(Extended range)****STANDARD RATINGS - ELECTRICAL CHARACTERISTICS**

Capacitance 100Hz +20°C ( $\mu$ F)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance 100Hz -55°C ( $\Omega$ )	Max. I leak		I <sub>rms</sub> Max. 100kHz +85°C (mA)
			-55°C (%)	+85°C (%)	+125°C (%)			+20°C ( $\mu$ A)	+85°C ( $\mu$ A)	
<b>Rated voltage [+85°C] 15 V - 16 V - Category voltage [+125°C] 10 V</b>										
13	A	CT4E	-30	+15	+15	5	160	1	2	120
15	A	CT4E - 69F	-24	+12	+12	5	145	1	2	130
22	A	CT4E	-20	+12	+12	7	140	1	3	160
33	A	CT4E - 69F	-28	+16	+16	10	100	1	2	160
55	B	CT4E	-35	+20	+20	11	70	1	3,5	270
68	B	CT4E	-24	+15	+15	26	60	1	8	270
70	B	CT4E - 69F	-28	+16	+16	11	63	1	4	270
82	A	CT4E	-38	+13	+16	28	45	2	9	160
100	A	CT4E - 69FE	-40	+16	+16	28	40	2	9	80
120	B	CT4E - 69F	-28	+20	+20	27	50	1	7	270
150	C	CT4E	-55	+20	+20	25	40	2	9	410
170	C	CT4E - 69F	-32	+16	+16	22	38	2	10	410
220	B	CT4E - 69FE	-60	+20	+20	24	38	3	16	270
270	B	CT4E - 69FE	-60	+20	+20	30	32	3	16	270
270	C	CT4E - 69F	-56	+20	+20	50	30	2	16	340
330	B	CT4E	-60	+16	+20	30	18	3	16	300
360	B	CT4E - 69FE	-60	+20	+20	38	23	3	16	270
390	B	CT4E - 69FE	-60	+20	+20	38	21	3	16	280
540	C	CT4E - 69FE	-70	+25	+25	45	23	5	20	610
540	D	CT4E - 69F	-80	+25	+25	15	32	3	24	610
560	C	CT4E - 69FE	-70	+25	+25	55	20	5	20	440
680	C	CT4E - 69FE	-65	+20	+25	50	13	5	20	440
750	C	CT4E - 69FE	-70	+25	+25	52	13	6	24	440
820	C	CT4E - 69FE	-70	+15	+20	60	13	6	24	510
820	D	CT4E	-70	+30	+30	60	20	10	40	610
1000	D	CT4E	-70	+30	+30	60	19	10	40	610
1100	D	CT4E - 69FE	-70	+25	+25	53	18	8	25	700
1200	D	CT4E - 69FE	-70	+25	+25	55	17	8	28	750
<b>Rated voltage [+85°C] 20 V - Category voltage [+125°C] 13 V</b>										
82	A	CT4E - 69FE	-40	+16	+16	25	50	2	9	70
270	B	CT4E - 69FE	-60	+20	+20	24	24	3	16	270
330	B	CT4E - 69FE	-60	+20	+20	30	21	3	16	280
560	C	CT4E - 69FE	-70	+15	+20	40	20	5	20	510
1000	D	CT4E - 69FE	-70	+25	+25	40	21	8	28	750
<b>Rated voltage [+85°C] 25 V - Category voltage [+125°C] 16 V</b>										
9	A	CT4E	-20	+15	+15	4	210	1	2	120
10	A	CT4E - 69F	-16	+9	+9	4	190	1	2	130
12	A	CT4E	-16	+12	+12	12	155	2	9	70
15	A	CT4E	-16	+12	+12	12	130	3	12	70
22	A	CT4E - 69F	-20	+12	+12	7	140	1	3	160
39	B	CT4E	-28	+12	+12	18	90	1	9	250
45	B	CT4E	-35	+20	+20	15	78	1	5	270
50	A	CT4E - 69FE	-35	+15	+15	18	80	2	9	160
50	B	CT4E	-35	+20	+20	15	70	1	5	270
68	A	CT4E - 69FE	-35	+12	+15	22	50	2	9	160
100	B	CT4E - 69F	-28	+15	+15	15	50	1	10	270
100	C	CT4E	-50	+20	+20	23	45	2	10	410
110	C	CT4E	-55	+20	+20	25	42	2	11	410
120	C	CT4E	-30	+20	+20	18	28	6	26	420
180	B	CT4E - 69FE	-45	+16	+16	23	40	2	18	270
180	C	CT4E - 69F	-48	+15	+15	46	32	2	18	340
220	B	CT4E - 69FE	-45	+16	+16	24	38	3	16	270
270	B	CT4E - 69FE	-45	+13	+16	24	19	3	16	300
270	D	CT4E	-45	+20	+25	23	23	9	36	550
350	C	CT4E - 69FE	-60	+25	+25	27	26	7	28	410
350	D	CT4E - 69F	-70	+25	+25	25	24	7	28	580
430	C	CT4E - 69FE	-60	+25	+25	27	19	7	28	410
470	C	CT4E - 69FE	-60	+25	+25	33	18	6	24	410
510	C	CT4E - 69FE	-60	+25	+25	33	16	7	28	440
560	C	CT4E	-60	+20	+25	35	14	7	28	440
680	D	CT4E	-72	+25	+30	32	19	8	32	610
750	D	CT4E - 69FE	-60	+25	+25	36	18	8	29	610
820	D	CT4E - 69FE	-60	+25	+25	40	17	9	30	610

**(Extended range)****CT4E****STANDARD RATINGS - ELECTRICAL CHARACTERISTICS**

Capacitance 100Hz +20°C (μF)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance 100Hz -55°C (Ω)	Max. I leak		I <sub>rms</sub> Max. 100kHz +85°C (mA)
			-55°C (%)	+85°C (%)	+125°C (%)			+20°C (μA)	+85°C (μA)	
<b>Rated voltage (+85°C) 30 V - Category voltage (+125°C) 20 V</b>										
7	A	CT4E	-20	+15	+15	4	275	1	2	110
8	A	CT4E - 69F	-16	+12	+12	4	235	1	2	130
15	A	CT4E - 69F	-20	+12	+12	8	175	1	2	160
35	B	CT4E	-30	+20	+20	12	85	1	4	230
39	A	CT4E	-28	+10	+12	10	70	2	9	140
40	B	CT4E - 69F	-24	+12	+12	10	80	1	5	270
56	A	CT4E - 69FE	-32	+15	+15	20	55	2	9	70
68	B	CT4E - 69F	-24	+15	+15	26	60	1	8	270
80	C	CT4E	-45	+20	+20	15	52	2	10	410
100	C	CT4E - 69F	-28	+12	+12	16	45	2	12	410
150	B	CT4E - 69FE	-40	+12	+15	20	24	3	16	300
150	C	CT4E - 69F	-48	+15	+15	38	35	2	18	340
180	B	CT4E - 69FE	-40	+13	+16	21	22	3	16	300
200	B	CT4E - 69FE	-40	+16	+16	21	21	3	16	300
220	B	CT4E - 69FE	-40	+16	+16	23	38	3	16	270
300	C	CT4E - 69FE	-55	+25	+25	25	18	7	28	360
300	D	CT4E - 69F	-60	+25	+25	27	25	4	31	550
330	C	CT4E - 69FE	-45	+20	+25	25	16	6	24	440
390	C	CT4E - 69FE	-55	+20	+25	27	15	6	24	510
430	C	CT4E - 69FE	-55	+25	+25	27	15	7	28	440
470	C	CT4E	-55	+20	+25	29	14	8	32	440
470	D	CT4E	-55	+30	+30	25	23	8	32	550
560	D	CT4E	-65	+25	+30	28	20	9	36	590
620	D	CT4E - 69FE	-60	+25	+25	32	22	8	29	590
680	D	CT4E - 69FE	-60	+25	+25	36	20	7	25	750
<b>Rated voltage (+85°C) 35 V - 40 V - Category voltage (+125°C) 23 V - 25 V</b>										
6,8	A	CT4E	-20	+9	+9	4	300	1	2	70
27	B	CT4E	-25	+15	+15	20	90	5	24	250
39	A	CT4E - 69FE	-32	+15	+15	18	80	2	9	70
47	A	CT4E - 69FE	-32	+15	+15	16	60	2	9	70
100	C	CT4E	-30	+20	+20	18	33	8	32	420
150	B	CT4E - 69FE	-40	+16	+16	20	38	3	16	270
150	D	CT4E	-30	+20	+25	25	34	12	48	750
220	D	CT4E	-40	+20	+20	16	24	9	36	450
330	C	CT4E - 69FE	-55	+20	+25	26	25	6	24	500
400	D	CT4E - 69FE	-60	+25	+25	28	31	8	29	750
470	C	CT4E	-55	+20	+20	26	24	7	25	500
470	D	CT4E - 69FE	-55	+20	+20	26	29	7	25	750
480	D	CT4E - 69FE	-60	+25	+25	28	25	8	29	750
560	D	CT4E - 69FE	-60	+25	+25	29	24	8	32	750
<b>Rated voltage (+85°C) 50 V - Category voltage (+125°C) 32 V</b>										
4,5	A	CT4E	-20	+10	+10	3	380	1	2	110
5	A	CT4E - 69F	-16	+6	+6	3	355	1	2	130
5,6	A	CT4E	-16	+12	+12	5	375	3	12	130
10	A	CT4E - 69F	-24	+9	+9	5	250	1	2	160
22	A	CT4E - 69FE	-24	+12	+12	16	125	2	9	130
22	B	CT4E	-25	+20	+20	10	95	1	4	230
25	A	CT4E - 69FE	-24	+12	+12	14	90	1	5	270
25	B	CT4E - 69F	-20	+12	+12	10	90	1	4	270
33	A	CT4E - 69FE	-24	+12	+12	16	120	2	9	70
47	B	CT4E - 69F	-28	+15	+15	18	70	1	9	270
55	C	CT4E	-30	+20	+20	12	55	2	11	410
60	B	CT4E	-25	+12	+15	12	60	4	24	270
60	C	CT4E - 69F	-16	+12	+12	12	50	2	12	410
82	B	CT4E - 69FE	-35	+15	+15	20	45	2	16	270
82	C	CT4E - 69F	-32	+15	+15	21	45	2	16	340
120	B	CT4E - 69FE	-35	+15	+15	18	26	3	18	280
150	C	CT4E - 69FE	-40	+25	+25	30	33	7	28	370
150	D	CT4E	-50	+20	+20	17	29	5	32	460
160	C	CT4E - 69FE	-40	+25	+25	30	32	12	48	370
160	D	CT4E - 69F	-50	+20	+20	15	27	5	32	460
270	C	CT4E - 69FE	-40	+20	+25	24	24	7	28	500
330	D	CT4E	-46	+25	+30	24	22	9	36	550
360	D	CT4E - 69FE	-45	+25	+25	24	21	8	32	750
390	D	CT4E - 69FE	-45	+20	+25	25	20	8	32	750

CT4E

[Extended range]

## STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100Hz +20°C ( $\mu$ F)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance 100Hz -55°C ( $\Omega$ )	Max. I leak		Irms Max. 100kHz +85°C (mA)
			-55°C (%)	+85°C (%)	+125°C (%)			+20°C ( $\mu$ A)	+85°C ( $\mu$ A)	
<b>Rated voltage (+85°C) 60 V - 63 V - Category voltage (+125°C) 40 V</b>										
3,6	A	CT4E	-20	+10	+10	3	485	1	2	100
4	A	CT4E - 69F	-16	+6	+6	3	405	1	2	110
8,2	A	CT4E - 69F	-24	+9	+9	4	275	1	2	140
18	B	CT4E	-25	+15	+15	7	125	1	4,5	210
20	A	CT4E - 69FE	-20	+12	+12	7	120	1	5	140
20	B	CT4E - 69F	-16	+12	+12	6	105	1	5	270
27	A	CT4E - 69FE	-20	+12	+12	14	90	3	12	70
39	B	CT4E - 69F	-28	+12	+12	18	90	1	9	230
45	C	CT4E	-25	+15	+15	10	57	2	11	410
50	B	CT4E - 69FE	-30	+15	+15	9	60	2	12	230
50	C	CT4E - 69F	-16	+12	+12	9	55	2	12	410
68	B	CT4E	-25	+12	+15	12	60	4	24	270
68	C	CT4E - 69F	-32	+12	+12	27	50	2	16	340
100	B	CT4E - 69FE	-30	+15	+15	15	28	4	20	280
140	C	CT4E - 69FE	-30	+16	+20	18	32	7	28	420
140	D	CT4E - 69F	-40	+20	+20	21	28	8	32	430
220	C	CT4E - 69FE	-35	+15	+20	18	17	7	28	510
270	D	CT4E	-45	+20	+25	23	23	9	36	550
300	D	CT4E - 69FE	-45	+20	+20	21	23	8	32	550
330	D	CT4E - 69FE	-45	+20	+20	23	24	9	36	750
<b>Rated voltage (+85°C) 75 V - 80 V - Category voltage (+125°C) 50 V</b>										
3	A	CT4E	-20	+10	+10	2	625	1	2	100
3,5	A	CT4E - 69F	-16	+6	+6	2	505	1	2	110
6,8	A	CT4E - 69F	-20	+9	+9	4	300	1	2	140
8,2	A	CT4E - 69FE	-16	+12	+12	12	175	1,5	7	140
10	A	CT4E - 69FE	-16	+12	+12	12	165	1,5	7	140
12	A	CT4E - 69FE	-16	+12	+12	12	155	2	9	70
13	B	CT4E	-20	+15	+15	6	160	1	4	190
15	A	CT4E - 69FE	-14	+10	+12	12	150	3	12	140
15	B	CT4E - 69F	-16	+9	+9	6	135	1	5	270
18	A	CT4E - 69FE	-16	+12	+12	12	125	3	12	140
22	A	CT4E - 69FE	-16	+10	+12	12	100	3	12	140
33	B	CT4E - 69F	-24	+15	+15	15	90	1	10	230
35	C	CT4E	-20	+15	+15	13	68	2	11	410
39	B	CT4E - 69FE	-25	+15	+15	20	75	3,5	20	230
40	C	CT4E - 69F	-16	+12	+12	13	60	2	12	410
47	B	CT4E - 69FE	-18	+10	+12	20	75	3,5	20	270
56	B	CT4E - 69FE	-20	+12	+15	20	70	2	16	270
56	C	CT4E - 69F	-28	+15	+15	22	60	2	17	300
68	B	CT4E - 69FE	-25	+15	+15	12	42	4	24	270
82	B	CT4E - 69FE	-25	+12	+15	12	30	4	24	300
82	C	CT4E	-20	+12	+15	18	33	9	36	420
100	C	CT4E - 69FE	-30	+20	+20	18	33	8	32	420
100	D	CT4E	-35	+20	+20	18	31	5	36	420
110	C	CT4E - 69FE	-25	+16	+20	18	33	8	32	420
110	D	CT4E - 69F	-35	+20	+20	15	29	5	36	400
120	C	CT4E - 69FE	-30	+20	+20	18	28	6	26	420
150	C	CT4E - 69FE	-30	+20	+20	18	25	7	28	440
180	C	CT4E - 69FE	-30	+16	+20	18	17	8	32	440
180	D	CT4E	-30	+20	+20	16	28	9	36	470
220	D	CT4E - 69FE	-40	+20	+20	16	24	9	36	450
240	D	CT4E - 69FE	-40	+20	+20	17	23	9	36	450
270	D	CT4E - 69FE	-40	+20	+20	18	22	10	40	450

[Extended range]

CT4E

## STANDARD RATINGS - ELECTRICAL CHARACTERISTICS

Capacitance 100Hz +20°C ( $\mu$ F)	Case (code)	Type	Capacitance maximum change			Max. DF +20°C (%)	Max. Impedance 100Hz -55°C ( $\Omega$ )	Max. I leak		I <sub>rms</sub> Max. 100kHz +85°C (mA)
			-55°C (%)	+85°C (%)	+125°C (%)			+20°C ( $\mu$ A)	+85°C ( $\mu$ A)	
<b>Rated voltage (+85°C) 100 V - Category voltage (+125°C) 63 V</b>										
2,5	A	CT4E - 69F	-15	+4	+4	2	710	1	2	100
4,7	A	CT4E - 69F	-16	+6	+6	3	500	1	2	130
8,2	A	CT4E	-12	+12	+12	12	250	3	12	130
10	A	CT4E - 69FE	-12	+12	+12	12	200	3	12	130
10	B	CT4E	-16	+12	+12	12	200	3	12	60
11	B	CT4E - 69F	-15	+6	+6	4	200	1	4	230
22	B	CT4E - 69F	-16	+6	+6	10	100	1	9	230
27	C	CT4E	-20	+15	+15	8	90	2	11	230
30	C	CT4E - 69F	-15	+8	+8	8	85	2	12	340
33	B	CT4E	-18	+15	+15	20	85	4	24	250
39	B	CT4E - 69FE	-18	+15	+15	20	80	4	24	250
43	C	CT4E - 69F	-20	+8	+8	16	70	2	17	300
47	B	CT4E	-25	+10	+10	17	65	5	24	250
56	C	CT4E	-20	+15	+15	18	45	9	36	400
68	C	CT4E - 69FE	-20	+15	+15	18	40	9	36	400
68	D	CT4E	-25	+15	+15	25	40	6	30	450
82	C	CT4E	-30	+10	+15	30	30	10	40	500
86	D	CT4E - 69F	-25	+15	+15	15	30	5	35	370
120	D	CT4E - 69FE	-40	+20	+20	25	36	12	48	450
150	D	CT4E	-30	+20	+25	25	34	12	48	750
<b>Rated voltage (+85°C) 125 V - Category voltage (+125°C) 80 V</b>										
1,7	A	CT4E - 69F	-15	+4	+4	2	1090	1	2	100
3,6	A	CT4E - 69F	-16	+5	+5	4	615	1	2	110
6,8	A	CT4E - 69FE	-16	+12	+12	12	300	3	12	130
8,2	A	CT4E	-17	+12	+12	14	270	4	15	50
9	A	CT4E - 69FE	-16	+12	+12	12	250	4	15	130
9	B	CT4E - 69F	-15	+6	+6	9	220	1	5	210
10	B	CT4E	-16	+10	+10	10	210	1	5	190
14	B	CT4E - 69F	-16	+7	+7	10	160	1	7	190
18	C	CT4E	-15	+10	+10	16	135	4	12	340
25	C	CT4E - 69F	-16	+10	+10	16	120	2	13	260
27	B	CT4E - 69FE	-25	+15	+15	20	90	5	24	250
47	C	CT4E - 69FE	-30	+10	+15	18	50	10	40	500
56	D	CT4E	-25	+15	+15	18	32	10	40	330
80	D	CT4E - 69F	-20	+20	+20	20	34	9	50	400
82	D	CT4E - 69FE	-40	+20	+20	25	40	12	48	400
120	D	CT4E	-30	+20	+25	20	38	12	48	750
<b>Rated voltage (+85°C) 150 V - Category voltage (+125°C) 100 V</b>										
3	A	CT4E	-20	+15	+15	15	750	1	4	100
6,8	B	CT4E	-15	+10	+10	15	300	2	5	190
11	B	CT4E	-20	+15	+15	15	200	2	12	190
14	C	CT4E	-15	+10	+10	20	175	4	24	260
22	C	CT4E	-20	+15	+15	20	136	4	24	260

# Electrical characteristics

## CAPACITANCE


The capacitance is defined by a rated value ( $C_R$ , indicated on the capacitor) and a tolerance (generally  $\pm 20\%$ ).

The capacitance is measured at a 100Hz or at a 120Hz frequency under a 0,1 to 1  $V_{AC}$  voltage and a 2,1 to 2,5 V bias (or 9 to 10 V for  $U_R \geq 100$  V).

At room temperature, it must be in the range defined by the rated value and the tolerance.

Capacitance change vs temperature: see typical curves below. Maximum changes are given, for each type, on the data sheets.

## CAPACITANCE CHANGE VS TEMPERATURE

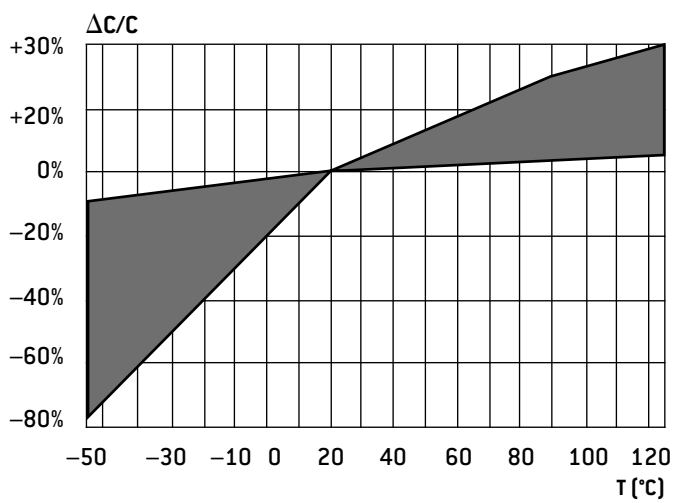

## TOLERANCE (ON RATED CAPACITANCE)

It defines, with the rated capacitance, the range in which the capacitance value must be at room temperature.


**e.g.:** Rated capacitance:  $100\mu F$

Tolerance: 20%

The measured capacitance must be between:

$$100 - (20\% \text{ of } 100) = 80\mu F \text{ and } 100 + (20\% \text{ of } 100) = 120\mu F$$

The standard tolerance for tantalum capacitors is 20%.






# Electrical characteristics


## DIRECT DC VOLTAGE

The **rated voltage ( $U_R$ )**, indicated on the capacitor, is the maximum DC voltage which can be applied continuously between  $-55^{\circ}\text{C}$  and  $+85^{\circ}\text{C}$ .

For the types which can be used up to  $125^{\circ}\text{C}$ , the voltage must be derated between  $+85^{\circ}\text{C}$  and  $+125^{\circ}\text{C}$  according to the following curve.

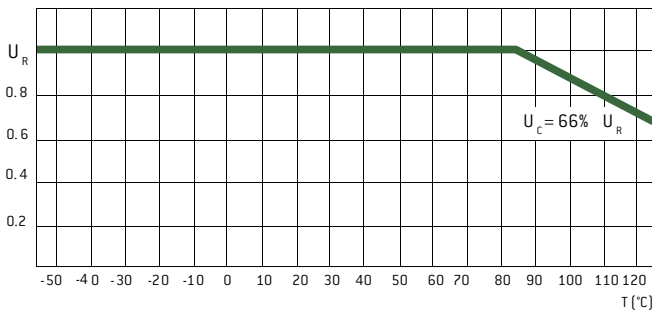

For the types which can be used up to  $200^{\circ}\text{C}$ , the voltage must be derated between  $+85^{\circ}\text{C}$  and  $+200^{\circ}\text{C}$  according to the following curve.

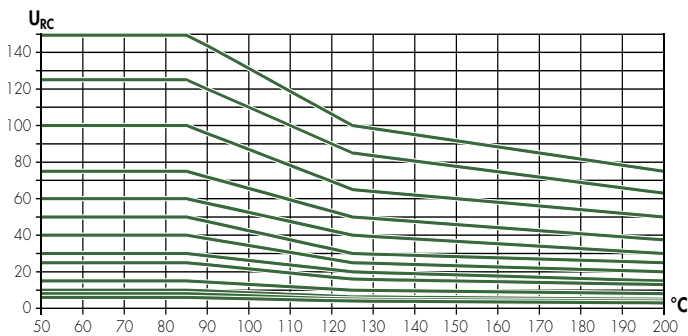

The **category voltage ( $U_c$ )** is consequently the maximum DC voltage which can be applied continuously at  $+125^{\circ}\text{C}$ .

The **surge voltage** is the maximum voltage which can be applied for short periods.

It is given for each type in the data sheet and is generally equal to 1,15 times  $U_R$  between  $-55^{\circ}\text{C}$  and  $+85^{\circ}\text{C}$  and 1,15 times  $U_c$  at  $+125^{\circ}\text{C}$ .

Tests are performed with charging periods of 30 seconds, through a  $1000 \Omega$  resistor, and discharging periods of 5 min 30s. 1000 cycles are done.

## REVERSE VOLTAGE

Capacitors in silver cases (CT4, CT4E, CT9, CT9E) and some in tantalum cases (WT83, WS83) cannot withstand any reverse voltage: it would cause damage, more or less rapidly depending upon the voltage value.

It is therefore necessary to be sure that the bias voltage is high enough to avoid that the AC voltage creates a reverse voltage (negative peak).

Other capacitors in tantalum cases (CT79, CT79E, ST79, DSCC 93026, M39006/22 and M39006/25) can withstand a reverse voltage as specified in the individual datasheet.


## LEAKAGE CURRENT

Leakage current is the residual current which flows through the capacitor after the charging time, under rated voltage. It is measured after a time not exceeding 5 minutes and is given in  $\mu\text{A}$ .

It is equivalent to the insulation resistance of the capacitor and it must be as low as possible.

Maximum leakage current is a function of capacitance and rated voltage values and is given, for each type, in the data sheets.

## LEAKAGE CURRENT CHANGE VS APPLIED VOLTAGE

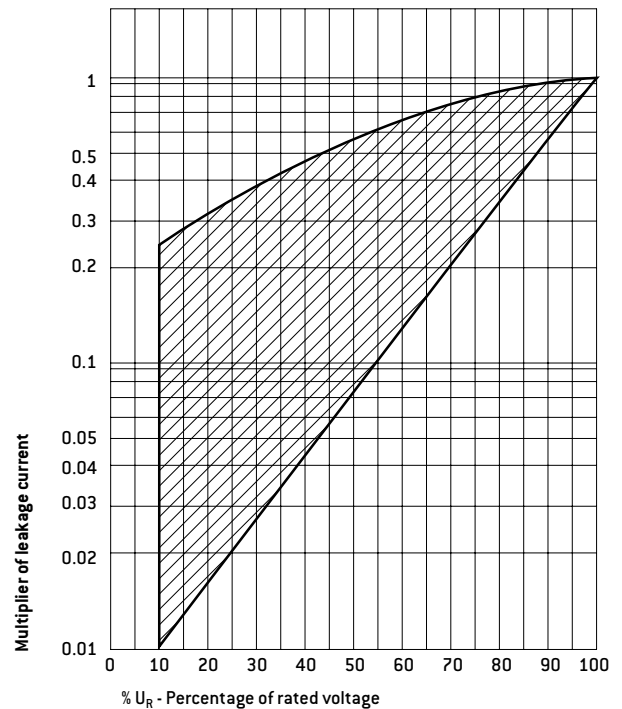

# Electrical characteristics

## DISSIPATION FACTOR

Dissipation factor is generally measured at the same time as the capacitance, with the same conditions. It is a function of the series resistance of the capacitor and the capacitance at low frequency.


$$DF = ESR \times C \times 2\pi f$$

At low frequency, the series resistance is the sum of an ohmic part (leads, contacts, MnO<sub>2</sub>) and the dielectric losses.

Dissipation factor is given in % and maximum limits are given for each type in the data sheets.

## EQUIVALENT SERIES RESISTANCE OR IMPEDANCE

Equivalent circuit of a capacitor

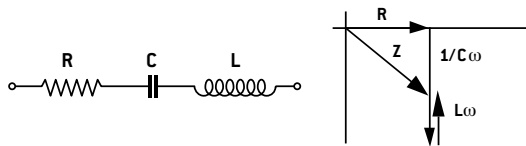

**R:** equivalent series resistance of the capacitor (leads, contacts, MnO<sub>2</sub>, dielectric losses)

**L:** inductance mainly due to the leads

**C:** capacitance

### Impedance

It is specified at 100Hz and -55°C and the formula for impedance is:


$$Z = \sqrt{R^2 + [L\omega - 1/C\omega]^2}$$

It can be seen that:


- at low frequencies, impedance is a function of capacitance
- at high frequencies, impedance is a function of inductance
- at medium frequencies, it is a function of the ESR

Maximum impedance: see data sheets.

## ESR CHANGE VS TEMPERATURE

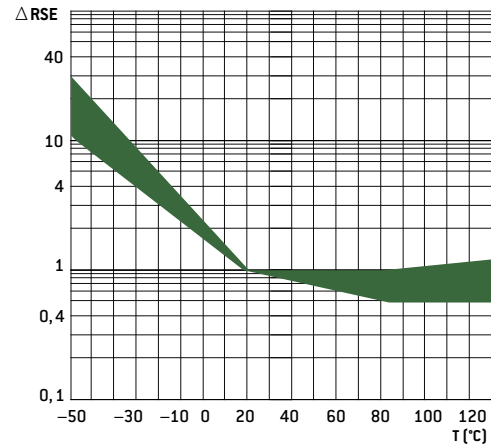

## ESR CHANGE VS FREQUENCY

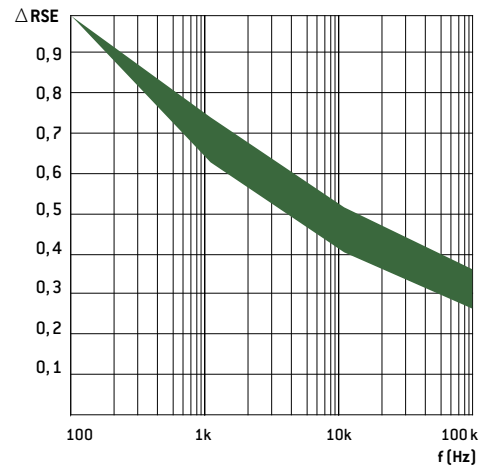

# Electrical characteristics

## MAXIMUM RIPPLE CURRENT

### CT79/79E (SMD) - CT79/79E HT200 - ST79 (SMD) - ST79 HT200 - WT83 - WS83

Maximum ripple currents which are indicated in the data sheets are given for the following conditions:

**Temperature:** +85°C (+70°C only WT82)

**Frequency:** 40kHz

**Applied voltage:** 0,66

If conditions are different, use the multipliers given in the table below to calculate the new maximum current.

Frequency	100Hz				1kHz				10kHz				40kHz				100kHz				
	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	+55°C	+85°C	+105°C	+125°C	
Peak voltage in % of $U_R$	66%	0,6	0,6	0,46	0,27	0,72	0,72	0,55	0,32	0,88	0,88	0,68	0,4	1	1	0,77	0,45	1,1	1,1	0,85	0,5
	70%	0,6	0,58	0,44	–	0,72	0,7	0,52	–	0,88	0,85	0,64	–	1	0,97	0,73	–	1,1	1,07	0,8	–
	80%	0,6	0,52	0,35	–	0,72	0,62	0,42	–	0,88	0,76	0,52	–	1	0,87	0,59	–	1,1	0,96	0,65	–
	90%	0,6	0,46	–	–	0,72	0,55	–	–	0,88	0,67	–	–	1	0,77	–	–	1,1	0,85	–	–
	100%	0,6	0,39	–	–	0,72	0,45	–	–	0,88	0,55	–	–	1	0,63	–	–	1,1	0,69	–	–

### CT4 - CT4E - CT9 - CT9E TYPES

Maximum ripple currents which are indicated in the data sheets are given for the following conditions:

- frequency from 100Hz to 100kHz and more
- temperature from –55°C to +85°C

#### Correction vs temperature

If the temperature is higher than 85°C, decrease linearly the maximum value from 100% at +85°C to 80% at +125°C.

#### Correction vs frequency

If frequency is lower than 100Hz, apply the following multipliers to the maximum ripple currents:

**75Hz:** 0,79      **60Hz:** 0,65      **50Hz:** 0,55      **25Hz:** 0,55

### OTHERS RULES (FOR ALL TYPES)

- the sum of the positive peak AC voltage and the DC bias voltage must be lower than the rated voltage.
- the negative peak must not create any Reverse voltage (or maximum 3 volts for CT79 and CT79E types).
- because of the increase of the series resistance at low temperature, it is better to not apply directly the maximum ripple current but to increase this one gradually to raise the capacitor temperature.

## CLIMATIC CHARACTERISTICS

### 1- CLIMATIC CATEGORY

Climatic category defines the temperature range over which the capacitor can be used continuously, and also the number of days for the damp heat test (this test is performed periodically at 40°C with a 93% moisture rate).

**Note:** it is necessary to derate the voltage for temperatures higher than 85°C (see page 15).

## 2- THERMAL SHOCKS - RAPID CHANGES OF TEMPERATURE

This test is performed to check that the capacitors can withstand sudden temperature changes. The method which is used is the one with two chambers, one at –55°C, the other one at +125°C. Five cycles are performed, with 30min at low temperature and 30min at high temperature, during the periodical tests (30 cycles for CT79 type). Electrical characteristics are measured after this test.

### 3 - DAMP HEAT TEST

This test is performed during the periodical test, with the following conditions:

**Temperature:** 40°C

**Humidity:** 90 to 95%

**DC voltage:** without

**Time:** 21 or 56 days

Electrical characteristics are measured after this test.

## MECHANICAL CHARACTERISTICS

### 1 - VIBRATIONS

This test is performed during the periodical test, with the following conditions:

#### CT9 - CT9E types

- Frequency: 10 to 2000Hz
- Amplitude: 1,5mm or 196m/s<sup>2</sup> - 20g
- Time: 6 hours

#### CT79/79E (SMD) - CT79/79E HT200 - ST79 (SMD) - ST79 HT200 - WT83 - WS83

- Frequency: 10 to 2000Hz
- Amplitude: 3,5mm or 490m/s<sup>2</sup> - 50g
- Time: 6 hours

### 2 - SHOCKS

This test is performed just after the vibrations test, with the following conditions for all types:

- Acceleration: 981 m/s<sup>2</sup> - 100g
- Pulse width: 6 ms
- Shape: 1/2 sinewave
- Number of shocks: 18 (3 in each direction, positive and negative)

# Electrical characteristics

## RELIABILITY

Reliability of a component can be defined as its probability to work without any failure, in defined conditions and during a fixed time.

Reliability is not therefore only a function of the component quality, but also of the application and environmental conditions.

The parameter which is the most commonly used for the reliability is the failure rate in time, generally expressed in % per 1000 hours.

### CALCULATION OF A COMPONENT FAILURE RATE USED IN AN EQUIPMENT

The calculation method on the next page uses parameters which are given by the CNET (Centre National d'Étude des Télécommunications) in its Reliability Data Book (RDF 1993).

The failure rate is calculated with parameters which are function of the capacitor (capacitance, case type, approvals, high surge current test) and others ones which are representative of application conditions (voltage, temperature, resistance in serie, environmental conditions).

#### Example:


CT79E 2200 $\mu$ F - 6,3 V used under 3 volts, at 40°C, in a satellite in orbit:

$$\pi_t = 1,2 \quad \pi_v = 1,38$$

$$\pi_c = 1,4 \quad \pi_E = 0,5 \quad \pi_q = 1$$

$$\lambda = 3 \times 1,2 \times 1,38 \times 1,4 \times 0,5 \times 1.10^{-9}/h = 3,5.10^{-9}/h = 0,00035 \% \text{ defects}/1000 \text{ hours}$$


### $\pi_t$ = TEMPERATURE INFLUENCE

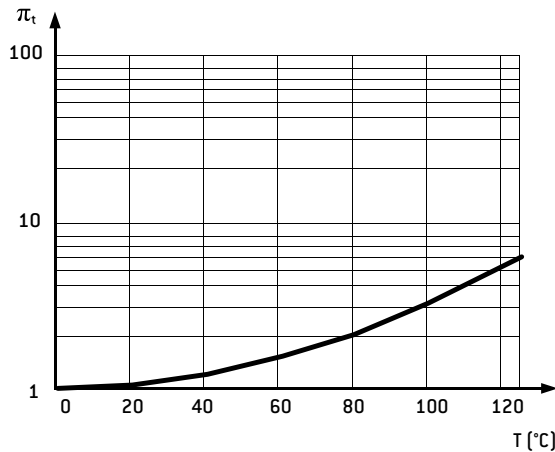

$$\text{Formula: } \pi_t = \exp [1,8. (t / tm)^2]$$

with: t = using temperature  
tm = maximum temperature  
Curve for tm = 125°C

### $\pi_v$ = INFLUENCE OF APPLIED VOLTAGE VS RATED VOLTAGE

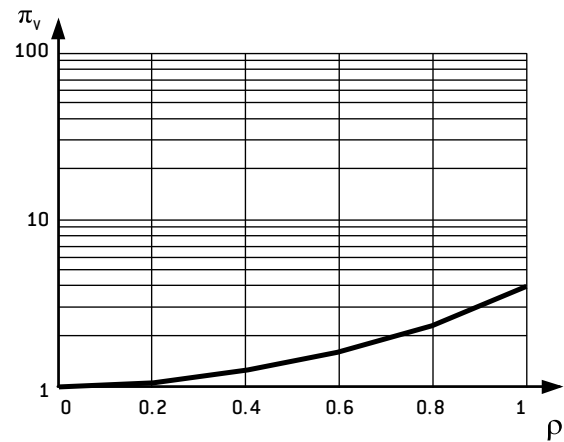

$$\text{Formula: } \pi_v = \exp [(\rho / 0,85)^2]$$

$$\rho = \frac{\text{peak voltage}}{\text{rated voltage}}$$

Curve  $\pi_v = f(\rho)$

### $\pi_c$ = INFLUENCE OF CAPACITANCE

3,3 $\mu$ F	$\pi_c = 0,9$
20 $\mu$ F	$\pi_c = 1,0$
1000 $\mu$ F	$\pi_c = 1,3$
2200 $\mu$ F	$\pi_c = 1,4$

### $\pi_E$ = INFLUENCE OF APPLICATION

Satellite in orbit	$\pi_E = 0,5$
Ground; stationary; protected	$\pi_E = 1$
Ground; stationary; non protected	$\pi_E = 2,5$
Ground; mobile; soft conditions	$\pi_E = 6$
Aircraft; soft conditions	$\pi_E = 6$
Ship; soft conditions	$\pi_E = 6$
Ground; mobile; hard conditions	$\pi_E = 8$
Ship; hard conditions	$\pi_E = 10$
Aircraft; hard conditions	$\pi_E = 15$
Satellite; launching	$\pi_E = 20$

### $\pi_q$ = INFLUENCE OF QUALIFICATION

Products approved to CECC	$\pi_q = 1,0$
Others products	$\pi_q = 2,0$

# Electrical characteristics

## PRODUCT SAFETY INFORMATION SHEET

This should read in conjunction with the Product Data Sheet/Specification.

Failure to observe the ratings, and the information on this sheet may result in a safety hazard.

### 1. MATERIAL CONTENT

Wet tantalum capacitors contain hazardous materials:

- Liquid electrolyte - gelled diluted sulphuric acid
- Solid tantalum anode

The device consists of solder coated terminal wires and the materials listed below:

- Silver case or tantalum case
- Rubber "o" rings
- PTFE spacers
- Filled epoxy resin end cap on silver case products

### 2. PHYSICAL FORM

These Capacitors are physically small and are cylindrical with axial leads.

### 3. INTRINSIC PROPERTIES

#### 3.1 Operating

Wet tantalum capacitors will operate satisfactorily providing that the sum of the applied d.c. and the peak a.c. ripple voltage does not exceed the rated d.c. voltage.

There must be no reversal of polarity.

The maximum ripple currents and voltages and d.c. polarising voltages are specified in the data sheets.

Some tantalum cased devices will stand up to 3 V<sub>DC</sub> Reverse for short periods of time.

A Reverse application of the rated voltage will result in loss of capacitance, early short circuit failure and may result in fire or explosion.

It may also cause consequential failure of other associated components in circuit, e.g. diodes, transformers, etc.

#### 3.2 Non-Operating

Wet Tantalum capacitors contain electrolyte which is a conducting material.


If electrolyte leaks onto a printed circuit board or similar insulated support, short circuits can be caused.

All electrolytes are corrosive to some extent.

No electrolyte should be allowed to come in contact with the skin, eyes, etc., and if they do appropriate medical treatment should be applied.



## CONSTRUCTION

CT79/79E (SMD) - CT79/79E HT200 - ST79 (SMD) - ST79 HT200 - WT83 - WS83

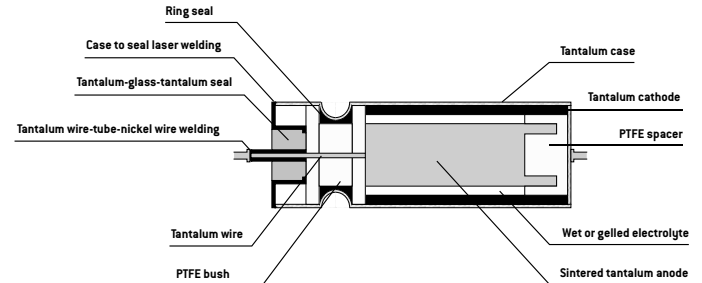


Glass metal seal: CT9 - CT9E

Epoxy sealing: CT4 - CT4E

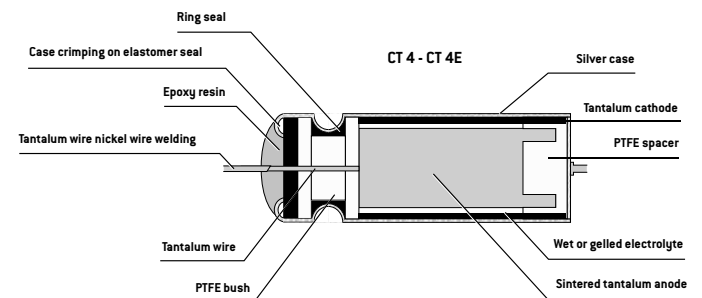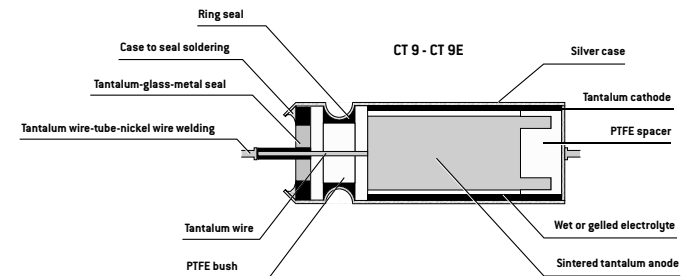

## MARKING (except DSCC 93026, M39006/22, M39006/25)

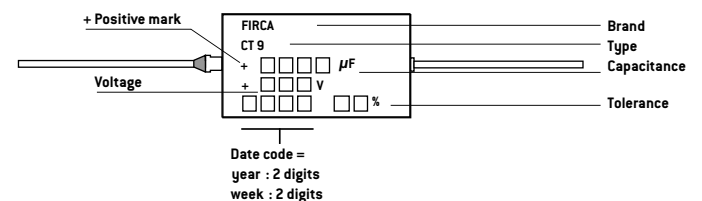

## PACKAGING

In cardboard boxes

# General information

Tantalum capacitors are, with ceramic, aluminum and film capacitors, one of the most used family.

The manufacturing technology and the constant improvements in tantalum powders allow it to be the capacitor with the highest CV (product capacitance x voltage) per volume, very long life and high reliability.

It has also the following advantages:

- Wide range of capacitance (less than 1 $\mu$ F to more than 10 000 $\mu$ F)
- Wide operating temperature range (-55°C to +200°C)
- Electrical characteristics stable with temperature
- Low leakage current
- Very low ESR for some types
- Stability after long periods of storage, without any reforming

All these characteristics allow tantalum capacitors to be commonly used either in large volume markets like mobile phones or computers, or in specific High-Rel applications such as space, aerospace and military.

Its main uses are found in the following functions:

- Filtering
- Bypass
- Coupling
- RC time constant
- Energy storage

Tantalum capacitors can be divided into two main families and several sub-families:

#### Solid tantalum capacitors:

- Solid MnO<sub>2</sub>
  - Metal cases
  - Molded cases
  - SMD
- Solid Polymer
  - SMD

#### Wet tantalum capacitors:

- Silver cases
- Tantalum cases

#### HOW TO USE THE SELECTION GUIDE

- 1 - The **Technical Selection Guide** can be used to select a product according to the main technical requirements.
- 2 - The **Classification according to specification** makes the link between all major standard specifications and the products.
- 3 - The **Selection Guide** by family has the same classification as in the catalogue. You will find for each type the main features, the approvals and the page number of the technical data sheet.

## MANUFACTURING

### ANODE AND INSULATOR

Tantalum capacitors are the capacitors which have the highest ratio of capacitance per volume. This is mainly due to the high dielectric coefficient of its insulator and to its large cross-section.

The basic raw material is a high purity (greater than 99,99%) tantalum powder with a very fine granulation, compressed to form a cylinder or a parallelepiped constituting the anode of the capacitor (positive plate).

The pellet is then sintered at high temperature (1200°C to 2200°C), under high vacuum (10<sup>-6</sup> Torr), firstly to purify the powder and secondly to obtain a strong mechanical structure by a welding of the particles.

The insulating part is obtained by anodization to a depth of the tantalum surface which forms a tantalum pentoxide film (Ta<sub>2</sub>O<sub>5</sub>) with a thickness of about 16 angstroms per anodization volt. The dielectric coefficient is between 21 and 27 depending upon the anodization conditions.

### WET ELECTROLYTE: CATHODE AND ENCAPSULATION

In this case, the cathode is formed by a sulphuric acid solution. The anodized tantalum pellet is impregnated with this solution and then placed in a silver or tantalum case, into which some equivalent gelled solution have been previously deposited.

The case is then crimped on the internal PTFE gasket to make the sealing. The final steps are welding (CT79), soldering (CT9) or elastomer seal (CT4) depending on the capacitors.

### SOLID ELECTROLYTE: CATHODE AND ENCAPSULATION

In this case, the cathode is formed either by manganous dioxide which is a grey semi conductor or by polymer solution.

Solid MnO<sub>2</sub> cathode is obtained by dipping the pellets into a manganous nitrate water solution which impregnates the internal structure; this solution is then decomposed in a high temperature oven to obtain manganous dioxide. This operation is repeated several times. The nature and quality of this semiconductor are important to some of the electrical parameters (especially the serial resistance).

To finish the negative plate, a graphite coating and then a silver coating are deposited on the outside surface of the manganous dioxide or conducting polymer.

The positive nickel lead is welded on the tantalum wire and the negative lead is either soldered for the products with axial leads or glued with a silver epoxy for the SMD range.

### BURN-IN - SORTING - INSPECTION

All the products are submitted to a final burn-in, with differing severities depending upon the characteristics of each type (temperature, voltage, duration).

Then follows the sorting, marking and inspection operations. It can be noted that the procedures for these operations are the same for approved and non approved parts (except the periodical tests).

# General information

## TYPE IDENTIFICATION - ORDERING INFORMATION

### THE COMPLETE IDENTIFICATION OF A PRODUCT IS MADE OF

- The type (or model)
- The tolerance
- The case size
- The rated voltage
- The rated capacitance
- If applicable the CECC specification number

### THE TYPE

It can be expressed with the commercial description (CTC21E C 33 $\mu$ F 10% 40V) or the **EXXELIA** part number (TS22EC336K040F).

When applicable the CECC specification number should be indicated.

### THE CASE SIZE

It is indicated on the technical data sheets in front of each capacitance-voltage value and is generally identified by a letter code. It is important to give this information because there can be, for the same type, a standard range and an extended range in which the same value will be available in two different sizes.

### THE RATED CAPACITANCE

It can be expressed:

- Directly in  $\mu$ F (eg: 47 $\mu$ F)
- Coded according to MIL specification, with:
  - 2 digits number for the value
  - A multiplying factor to obtain the capacitance in pF (power of 10)

**Eg:** 567 = 56.10<sup>7</sup> pF = 560 $\mu$ F

### THE TOLERANCE

It can be expressed directly in % or identified by a code letter:

M =  $\pm$ 20%

K =  $\pm$ 10%

J =  $\pm$ 5%

**N.B.:** the standard tolerance for tantalum capacitors is 20%; if no tolerance is specified, it would be considered as 20%.

A 20% tolerance means in fact -20% to +20%.

### THE RATED VOLTAGE

It is expressed directly in volts (V)

**N.B.:** 6,3V rated voltage can be coded as 6V.

## CECC SPECIFICATIONS

Some of the products which are described in this catalogue are made to a CECC specification; these documents give in detail the following information for each type:

- The climatic, electrical and mechanical characteristics
- The test and inspection procedures
- The sampling methods and levels
- The tests periods

The reference specifications concerning the tantalum capacitors are the following:

### CECC 30 000 (NFC 83-100)

Generic specification: fixed capacitors

- Terminology
- Quality Assessment Procedures
- Test and inspection methods

### CECC 30 200 (NFC 83-112)

Sectional specification: tantalum capacitors

- Preferred characteristics
- Quality Assessment Procedures
- Test and inspection methods

### CECC 30 201 XXX

Detail specifications solid tantalum capacitors

- Detailed characteristics for each type

### CECC 30 202 XXX

Detail specifications wet tantalum capacitors

- Detailed characteristics for each type

### CECC 30 800 (NFC 83-113)

Sectional specification: tantalum chip capacitors

- Preferred characteristics
- Quality Assessment Procedures
- Test and inspection methods

### CECC 30 801 XXX

Detail specifications tantalum chip capacitors

- Detailed characteristics for each type
- The list of all the detail specifications is given in the selection guide, with the corresponding type.

**NB:** Some of the products refer to specifications which are no longer published.

## OTHER SPECIFICATIONS

In addition to CECC approvals, some of the products are qualified to MIL standard M39006/22, M39006/25, DSCC DWG No. 93026 and some others are listed in ESA (European Space Agency) Preferred Parts Lists ESCC EPPL I or II.