

FP-6N-200

Highlights


- Conduction cooled
- Polypropylene dielectric
- Self-healing
- Operating frequency up to 1300 KHz
- Maximum operating core temperature 85°C
- Capacitance tolerance $\pm 10\%$
- Flame retardant UL94 - V0, ROHS compliant



Standard Capacitor Values

Rated Voltage Vrms	Nominal capacitance MFD at 1KHz	Max current Irms	Max power Kvar	Frequency KHz	Dimensions mm			Case Code	Terminal Style	Ordering Code
					W	D	H			
1100	0.025	200	200	1055-1270	50	18.2	70	V2	2H	SPOU0251100ANOV2002HK01
	0.05	200	200	527-636	50	18.2	70	V2	2H	SPOU0501100ANOV2002HK01
1000	0.10	300	200	318-715	50	18.2	70	V2	2H	SP00U101000ANOV2002HK01
700	0.20	350	200	325-487	50	18.2	70	V2	2H	SP00U200700ANOV2002HK01
	0.50	350	200	130-195	50	18.2	70	V2	2H	SP00U500700ANOV2002HK01
600	1.0	400	200	89-128	50	18.2	70	V2	2H	SP000010600ANOV2002HK01

Capacitor Drawing and Terminal Style

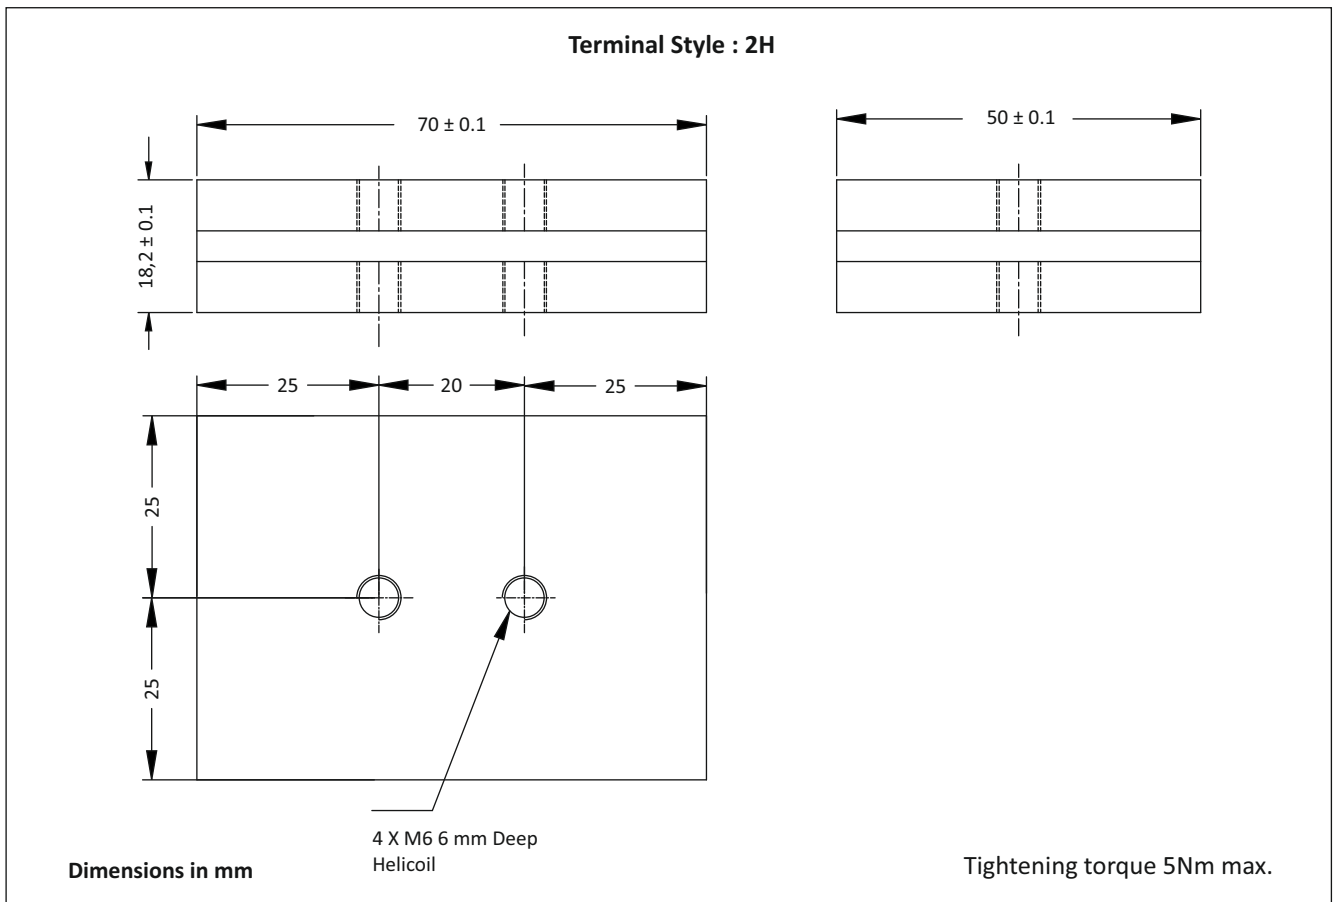

FP-6N-200

Frequency Derating

—◆— Voltage —■— Current —▲— Power

