


# IGBT SNUBBER CAPACITORS

- Direct Mounting ▪ Axial



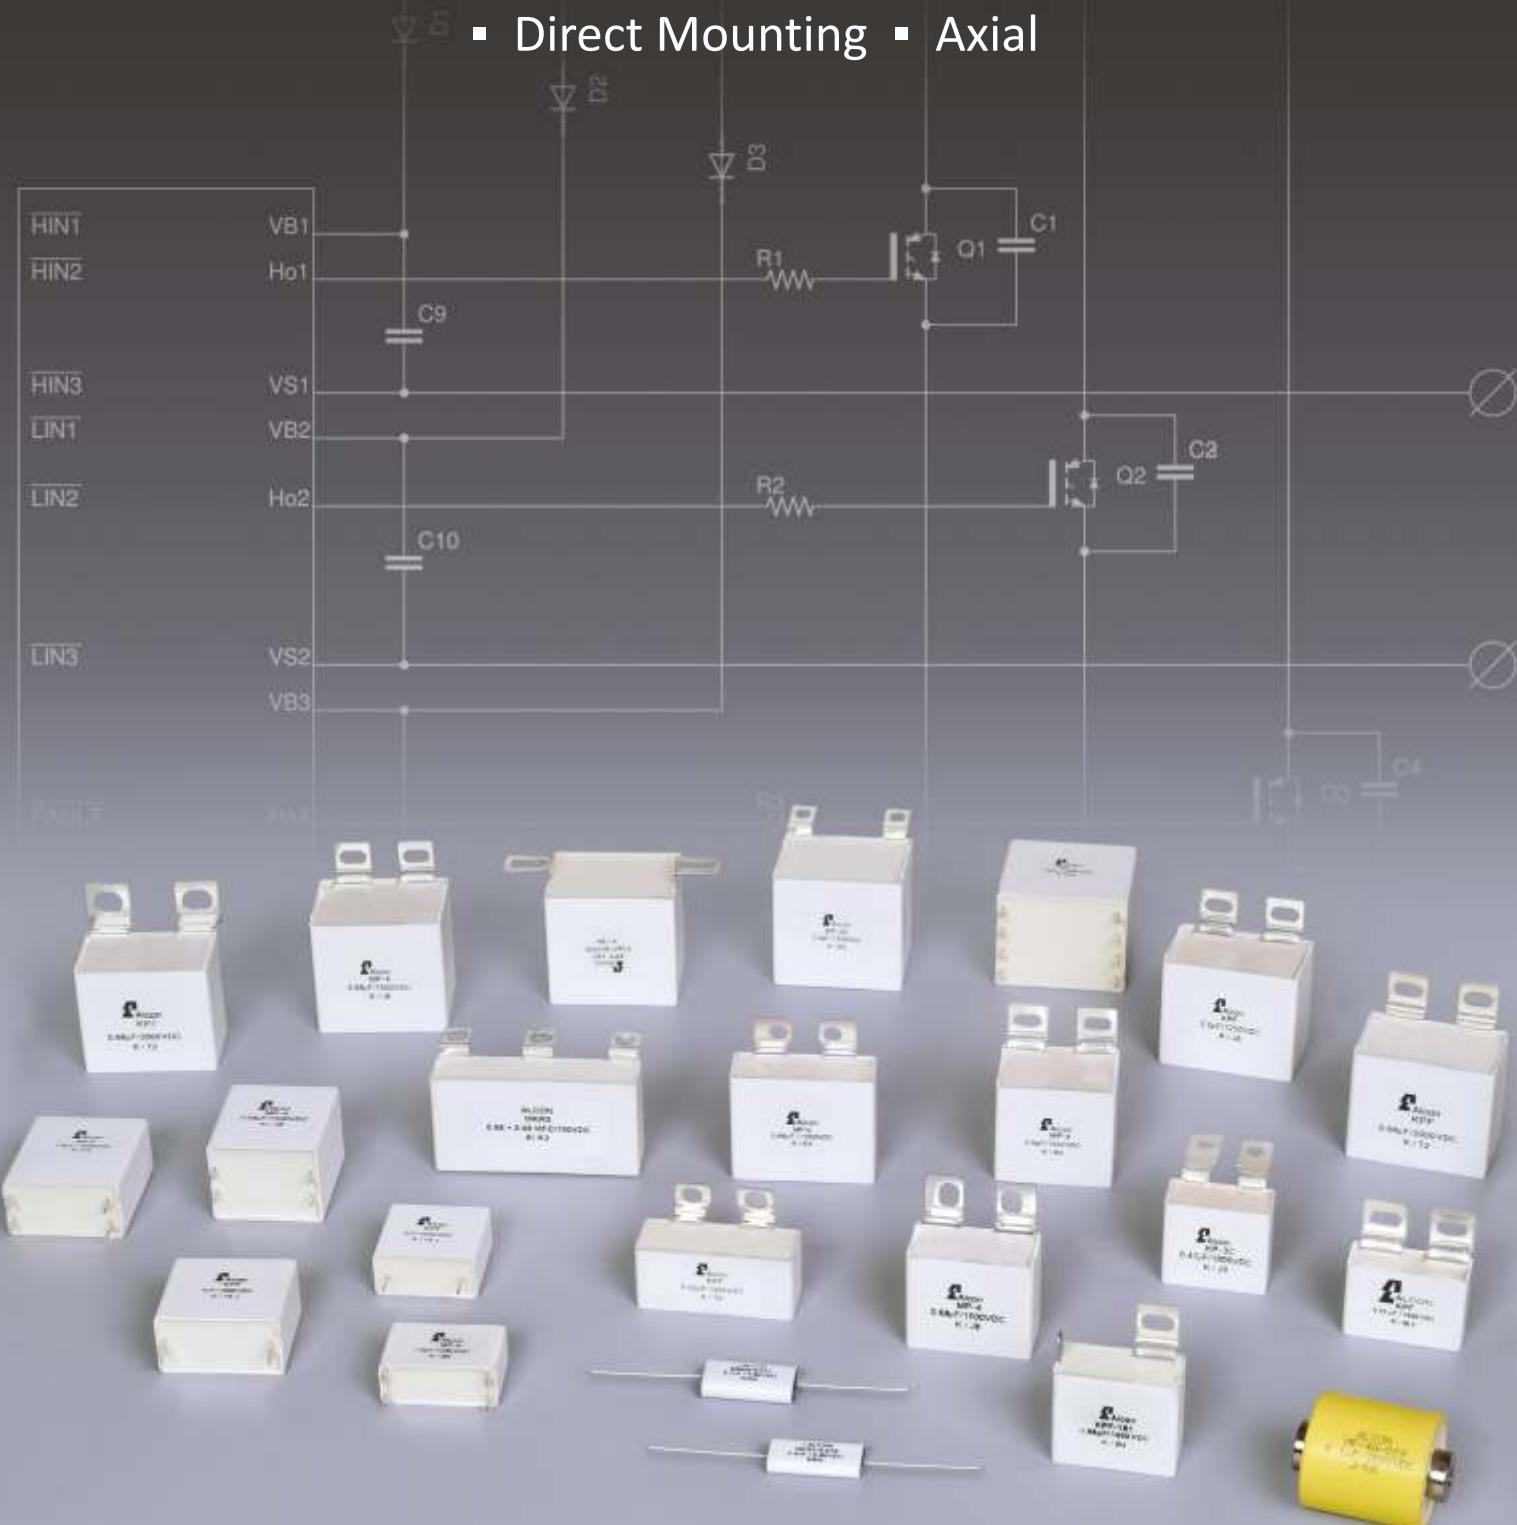

## INDEX

### Direct Mounting

- MP - 4 : Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection 1
- KPF : Extended foil electrodes with metallised polypropylene dielectric internal series connection 14
- KP - 3C : Extended foil electrodes and polypropylene film dielectric impregnated 26
- MKRS : Extended maetallised film design with internal series connection 35

### Axial


- MP - 4A : Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection 38
- KPF - 9 : Extended foil electrodes with metallised polypropylene dielectric internal series connection 44
- KP - 6 : Extended foil electrodes and polypropylene film dielectric impregnated 49

Part Number System 54

Cautions For Proper Use Of Film Capacitors 55




## MP-4

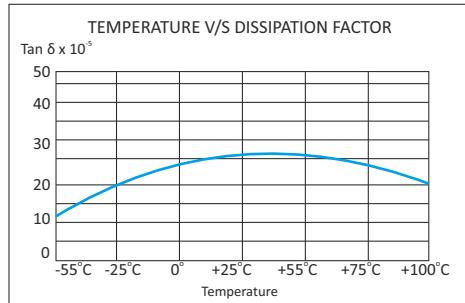



## Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

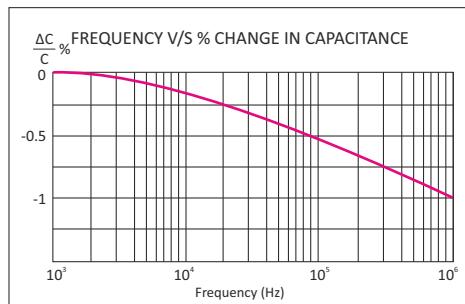

## Construction



Extended double Metallized polyester electrodes with Metallized polypropylene dielectric internal series connection

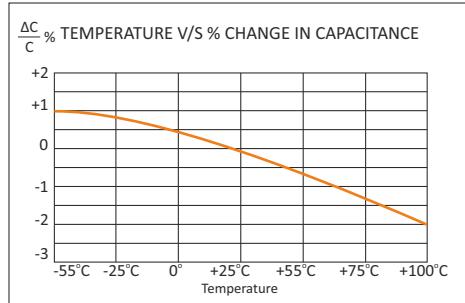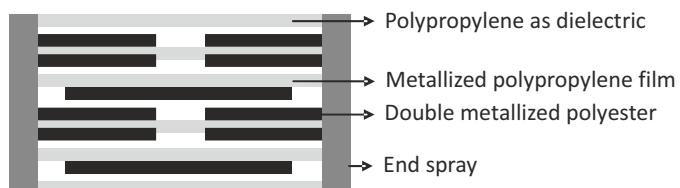

## Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- IGBT protection circuits
- Snubber networks
- Energy conversion and control in power electronics
- Protection circuits in SMPS

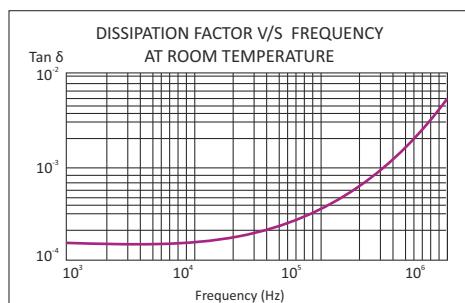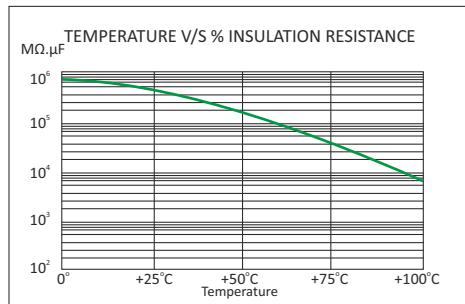

## MP-4

### Technical Specifications

#### Physical Characteristics

- Dielectric material Polypropylene film.
- Electrode material Double metallized polyester and metallized polypropylene film.
- Winding construction Extended double Metallized polyester electrodes with Metallized polypropylene dielectric internal series connection
- Enclosure Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

▪ Capacitance range	0.1 MFD to 6.3 MFD
▪ Capacity tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K)
▪ Rated voltage VDC	700, 850, 1000, 1200, 1500, 2000, 2500, 3000
▪ Rated voltage VAC	420, 500, 575, 630, 650, 700, 725, 750
▪ Test voltage between terminals	1.6 x rated voltage VDC for 2 seconds
▪ Test voltage terminal to case	3KVAC at 50Hz for 60 seconds
▪ Dissipation factor (Tan d)	$\leq 0.0005$ at 1 KHz and 25°C
▪ Temperature range	-40°C to +85°C
▪ Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute	$C \leq 0.33$ MFD $\geq 100,000 M\Omega$ $C > 0.33$ MFD $\geq 30,000 M\Omega$

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company's symbol  followed by the words ALCON
- The capacitor grade viz MP-4
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors







# MP-4

## Standard Capacitor Values

### Working Voltage 3000 VDC (750 VAC)





Rated Capacitance MFD	Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 70°C Amps	Typical ESR at 100KHz mΩ	Ordering Code*
0.047	B1	2515	118.20	7.00	16.50	S10U0473000AH0B1_ _ _ _ K01
0.047	H7	2515	118.20	7.50	16.50	S10U0473000AH0H7_ _ _ _ K01
0.068	B1	2515	171.02	8.00	11.50	S10U0683000AH0B1_ _ _ _ K01
0.068	H7	2515	171.02	9.00	11.50	S10U0683000AH0H7_ _ _ _ K01
0.100	H1	2515	251.50	12.50	8.50	S10U0103000AH0H1_ _ _ _ K01
0.150	H1	2515	377.25	15.00	6.00	S10U0153000AH0H1_ _ _ _ K01
0.220	H1	2050	451.00	14.50	8.20	S10U223000AH0H1_ _ _ _ K01
0.220	H4	2515	553.30	19.00	4.30	S10U223000AH0H4_ _ _ _ K01
0.330	H1	2050	676.50	16.50	6.10	S10U333000AH0H1_ _ _ _ K01
0.330	H5	1400	462.00	21.00	4.30	S10U333000AH0H5_ _ _ _ K01
0.470	H4	2050	963.50	19.50	5.00	S10U473000AH0H4_ _ _ _ K01
0.470	H6	1410	662.70	24.00	3.80	S10U473000AH0H6_ _ _ _ K01
0.680	H6,C2	1150	782.00	22.00	5.20	S10U683000AH_ _ _ _ _ K01
0.820	H6,C2	1150	943.00	24.00	4.70	S10U823000AH_ _ _ _ _ K01

Custom-designed capacitors are available on request

Refer to "Capacitor Drawing" on page 7 to 11

## MP-4

### Capacitor Drawings and Terminal Styles

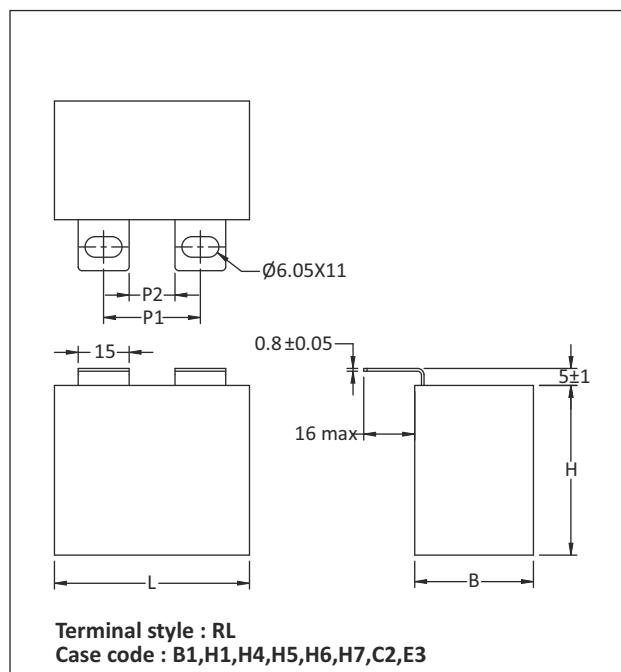
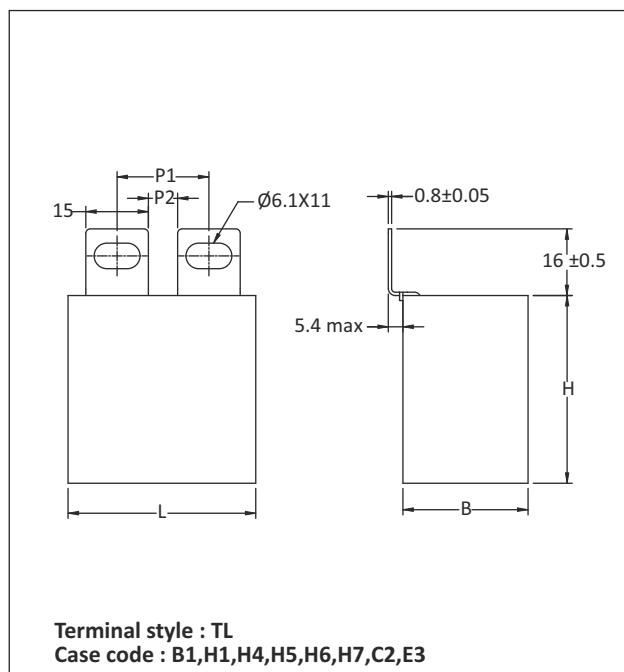
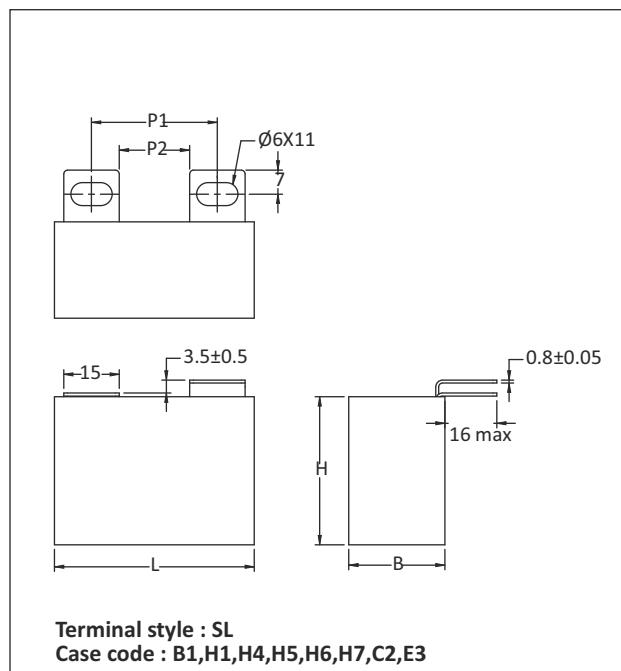
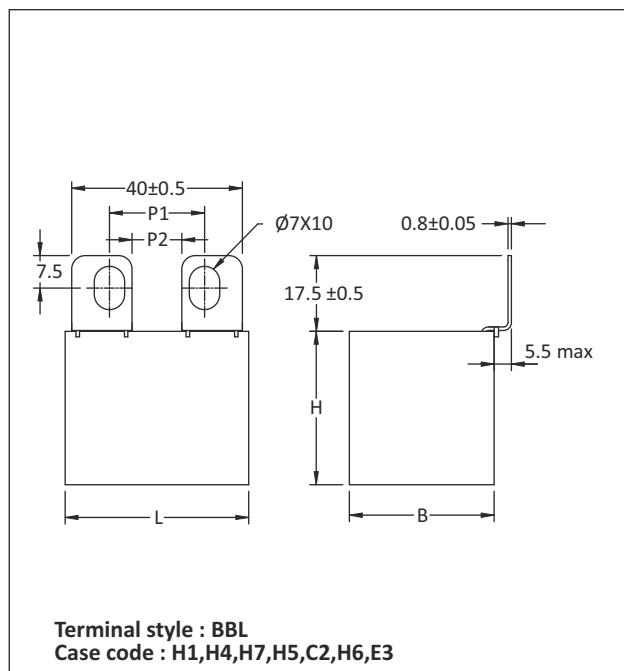


### Dimensions in mm

For details see Case Code table on page 12 & 13

## MP-4

### Capacitor Drawings and Terminal Styles

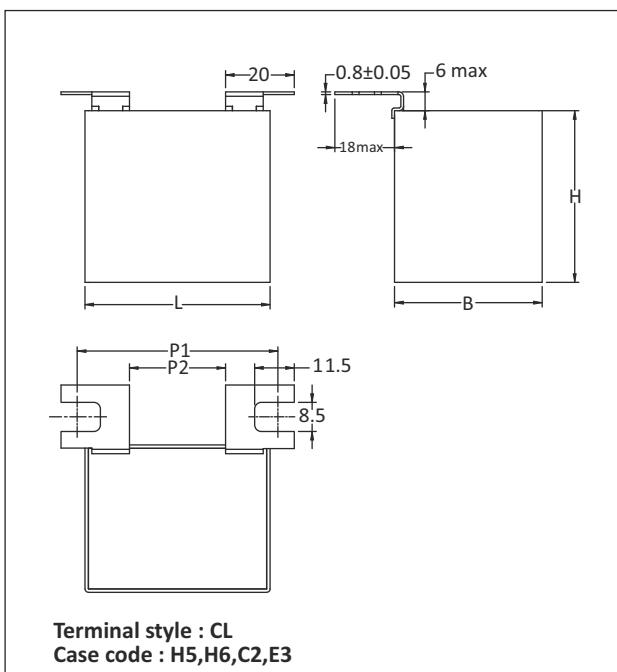
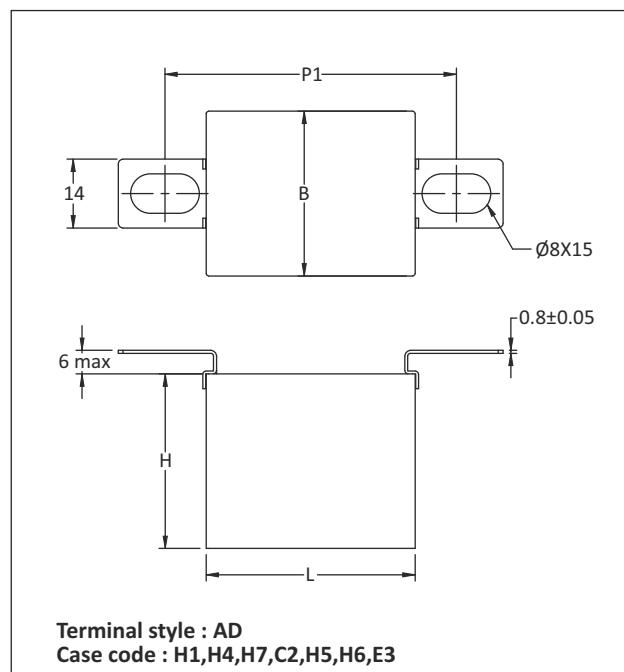
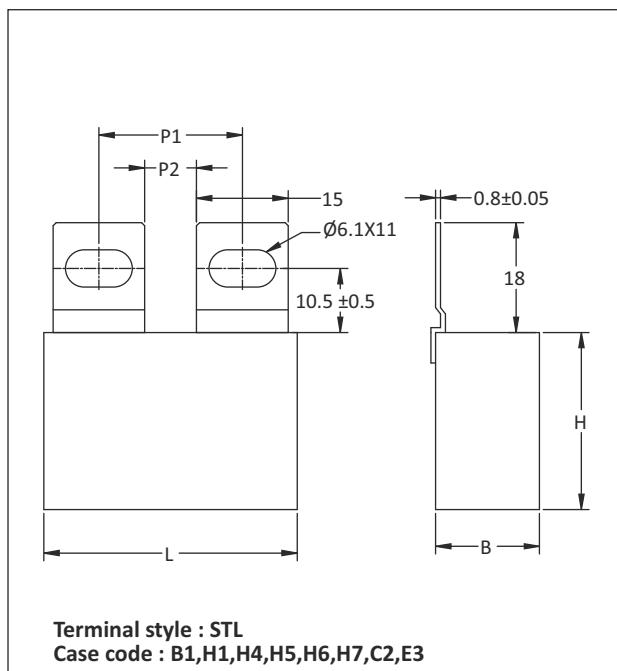
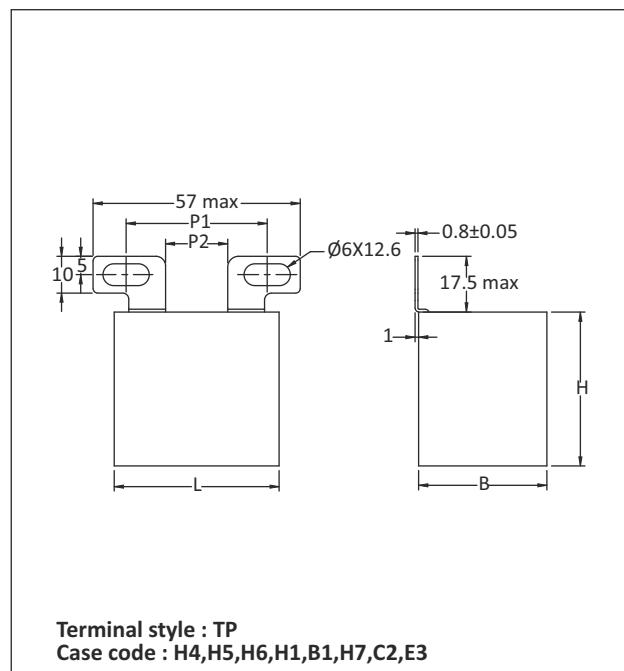


#### Dimensions in mm

For details see Case Code table on page 12 & 13

## MP-4

### Capacitor Drawings and Terminal Styles

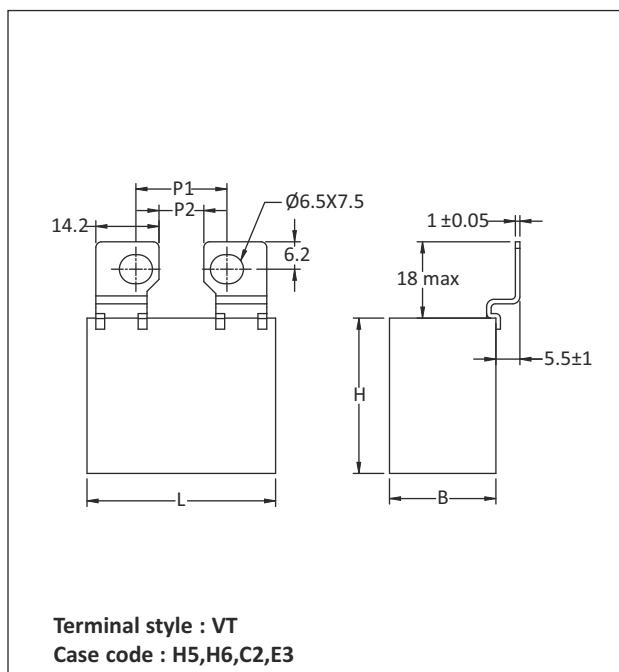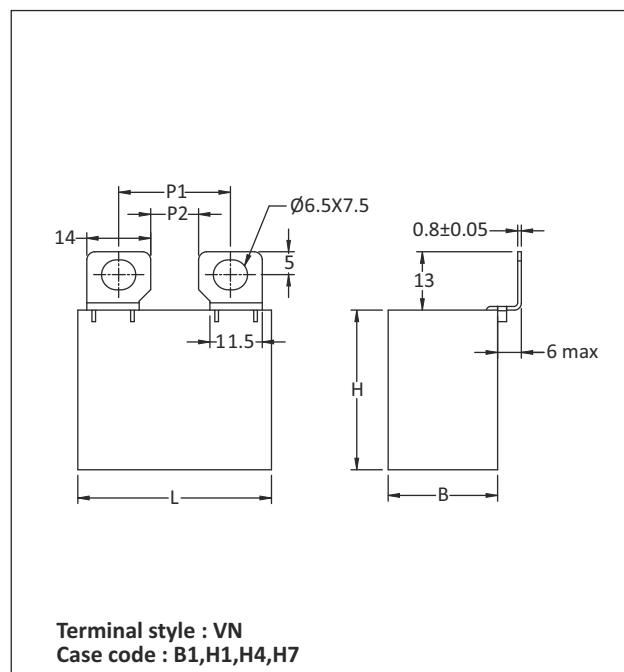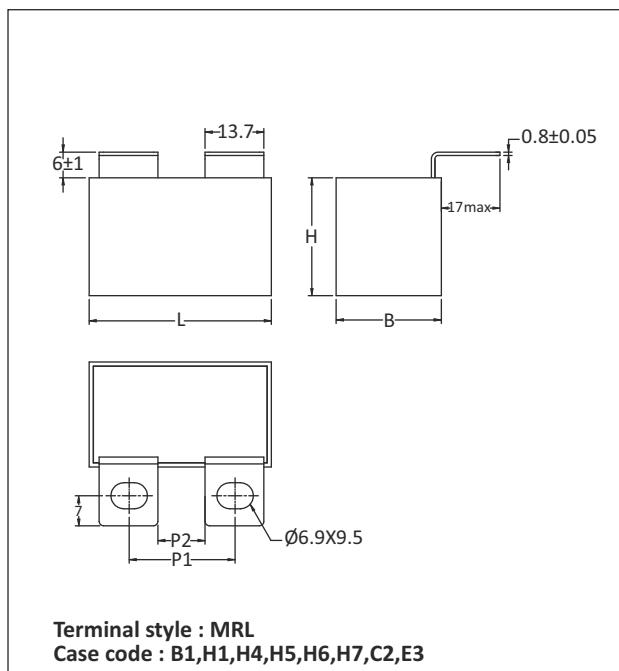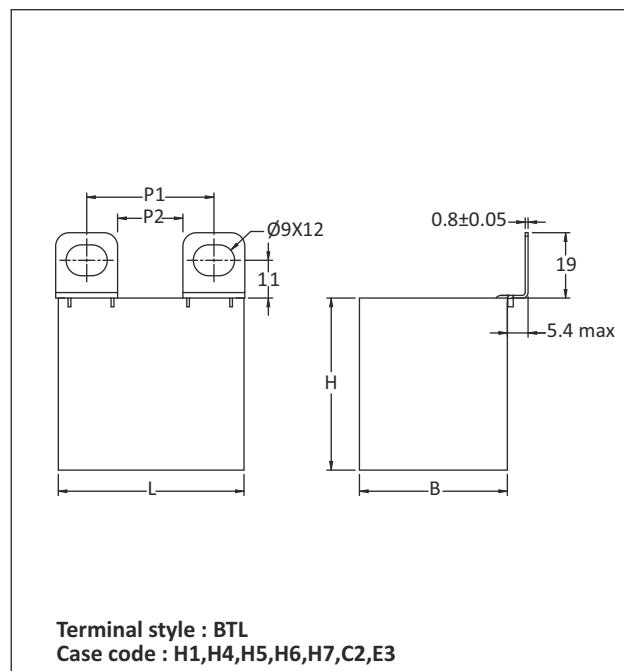


#### Dimensions in mm


For details see Case Code table on page 12 & 13

## MP-4


### Capacitor Drawings and Terminal Styles

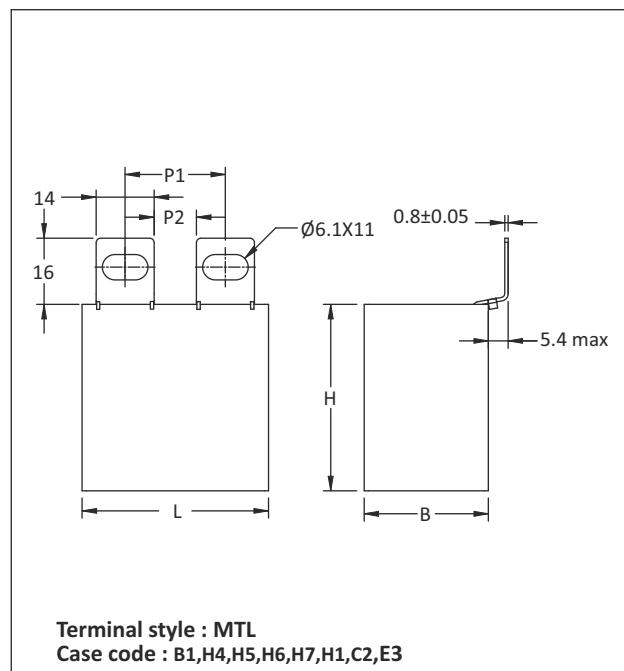


Terminal style : MTL  
Case code : B1,H4,H5,H6,H7,H1,C2,E3

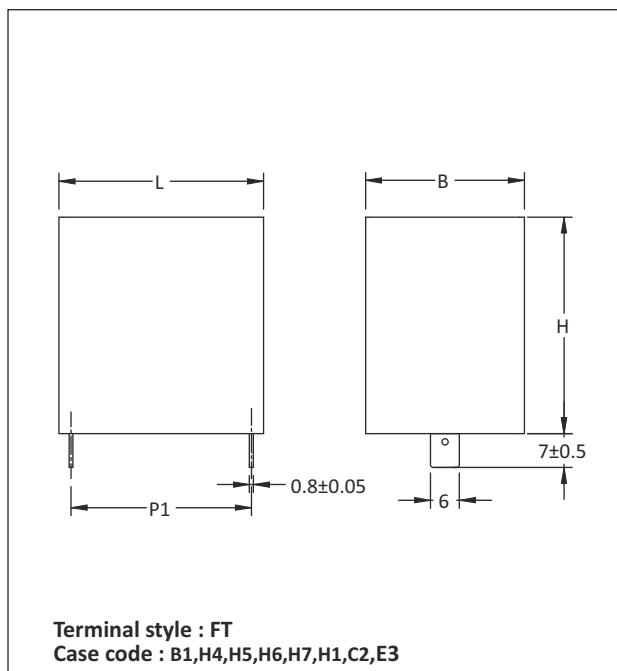

Terminal style : FT  
Case code : B1,H4,H5,H6,H7,H1,C2,E3

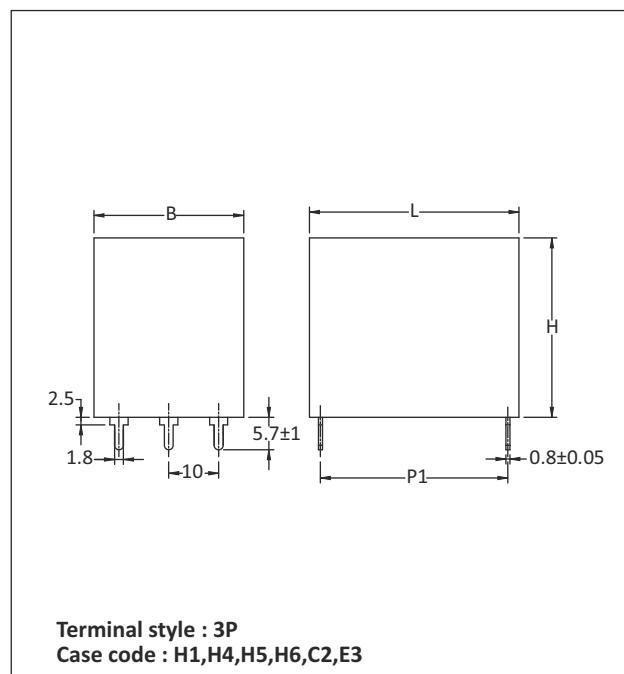

Terminal style : 3P  
Case code : H1,H4,H5,H6,C2,E3

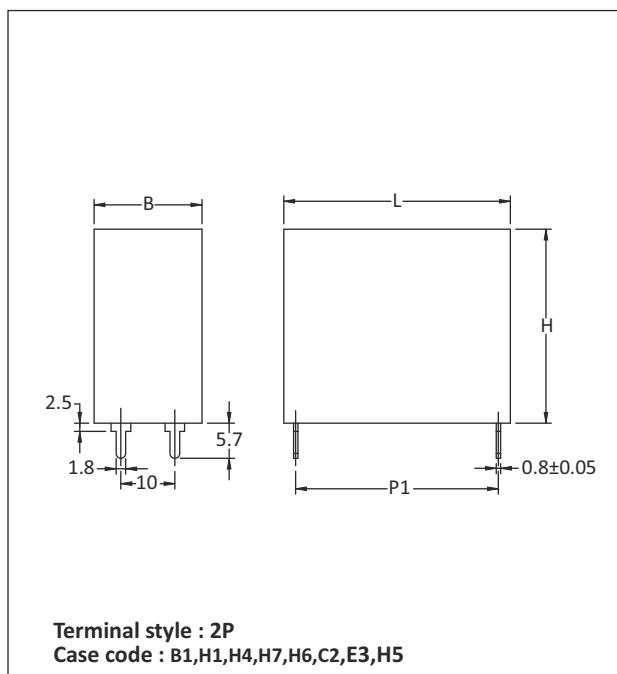


Terminal style : 2P  
Case code : B1,H1,H4,H7,H6,C2,E3,H5

### Dimensions in mm

For details see Case Code table on page 12 & 13

## MP-4

### Capacitor Drawings and Terminal Styles

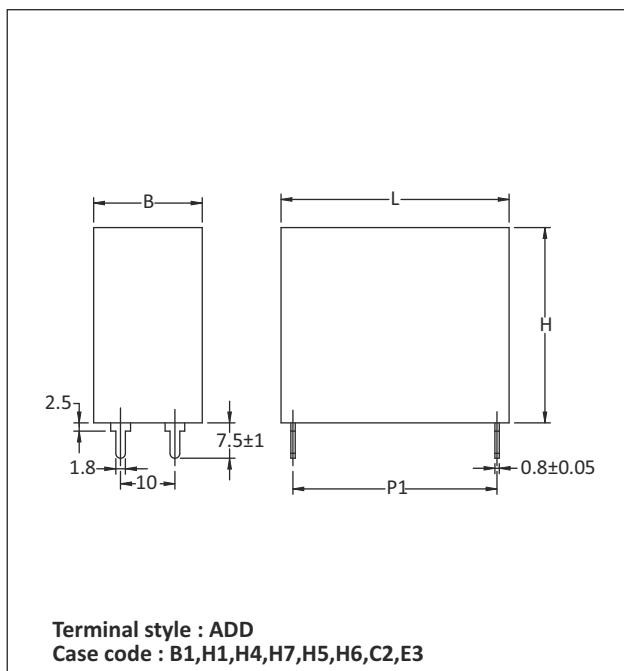

#### Dimensions in mm

For details see Case Code table on page 12 & 13



## MP-4

### Table of Case Codes and Dimensions


Case code	Dimensions in mm*			P1	P2	Terminal Styles
	B	H	L	P ± 0.5		
C2	43.00	50.00	54.00	48.50	-	FT,2P,3P,ADD
C2	43.00	50.00	54.00	26.50	11.50	TL,RL,STL,SL
C2	43.00	50.00	54.00	27.00	13.00	MTL
C2	43.00	50.00	54.00	68.50	-	AD
C2	43.00	50.00	54.00	37.00	19.00	BTL
C2	43.00	50.00	54.00	55.00	28.00	CL
C2	43.00	50.00	54.00	22.00	11.10	VT
C2	43.00	50.00	54.00	25.00	11.00	MRL
C2	43.00	50.00	54.00	22.00	11.50	BBL
C2	43.00	50.00	54.00	38.50	17.00	TP
E3	35.00	46.00	54.00	48.50	-	FT,2P,3P,ADD
E3	35.00	46.00	54.00	26.50	11.50	TL,RL,STL,SL
E3	35.00	46.00	54.00	27.00	13.00	MTL
E3	35.00	46.00	54.00	68.50	-	AD
E3	35.00	46.00	54.00	37.00	19.00	BTL
E3	35.00	46.00	54.00	55.00	28.00	CL
E3	35.00	46.00	54.00	22.00	11.10	VT
E3	35.00	46.00	54.00	25.00	11.00	MRL
E3	35.00	46.00	54.00	22.00	11.50	BBL
E3	35.00	46.00	54.00	38.50	17.00	TP

\* Refer to "Capacitor Drawing" on page 7 to 11

### Precaution


1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) :  $1.4 \times V_{rms} + V_{DC}$  should be less than rated VDC
4. MAX ESR = Typical ESR +30%

## KPF

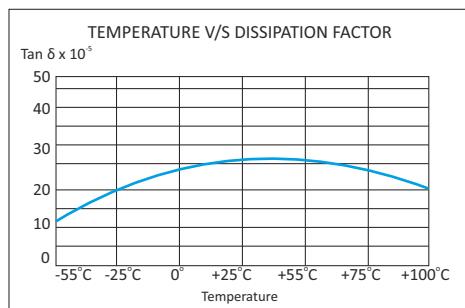



## Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

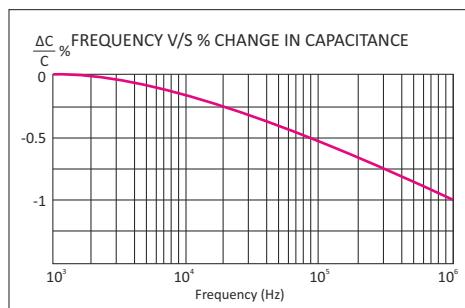


## Construction

Extended foil electrodes with Metallized polypropylene dielectric internal series connection

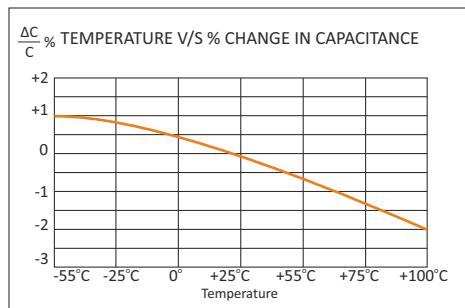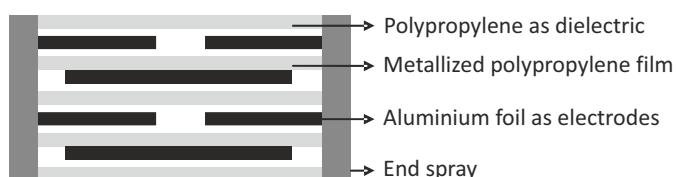


## Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

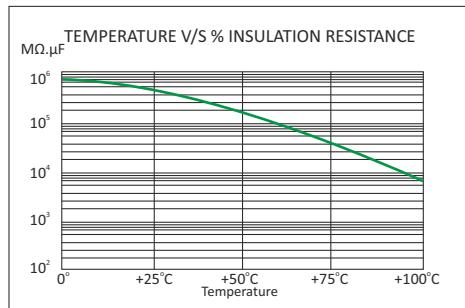

- IGBT protection circuits
- Snubber networks
- Energy conversion and control in power electronics
- Protection circuits in SMPS

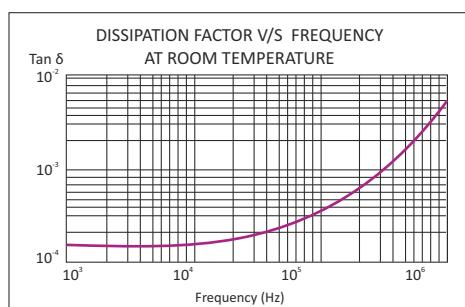

## KPF

### Technical Specifications

#### Physical Characteristics

- |                        |  |
|------------------------|--|
| ▪ Dielectric material  | Polypropylene film.  |
| ▪ Electrode material   | Aluminum foil and metallized polypropylene film  |
| ▪ Winding construction | Extended foil electrodes with metallized polypropylene dielectric internal series connection |
| ▪ Enclosure            | Preformed UL 94 V-0 plastic case with thermosetting resin-fill                               |

#### Electrical Characteristics

▪ Capacitance range	0.1 MFD to 3.3 MFD
▪ Capacity tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K)
▪ Rated voltage VDC	1000, 1250, 1500, 2000
▪ Rated voltage VAC	480, 550, 630, 700
▪ Test voltage between terminals	1.6 x rated voltage VDC for 2 seconds
▪ Test voltage terminal to case	3KVAC at 50Hz for 60 seconds
▪ Dissipation factor (Tan d)	$\leq 0.0005$ at 1 KHz and 25°C
▪ Temperature range	-40°C to +85°C
▪ Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute	$C \leq 0.33$ MFD $\geq 100,000 M\Omega$ $C > 0.33$ MFD $\geq 30,000 M\Omega$

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:





- The Company's symbol  followed by the words ALCON
- The capacitor grade viz KPF
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors





KPF

## Capacitor Drawings and Terminal Styles

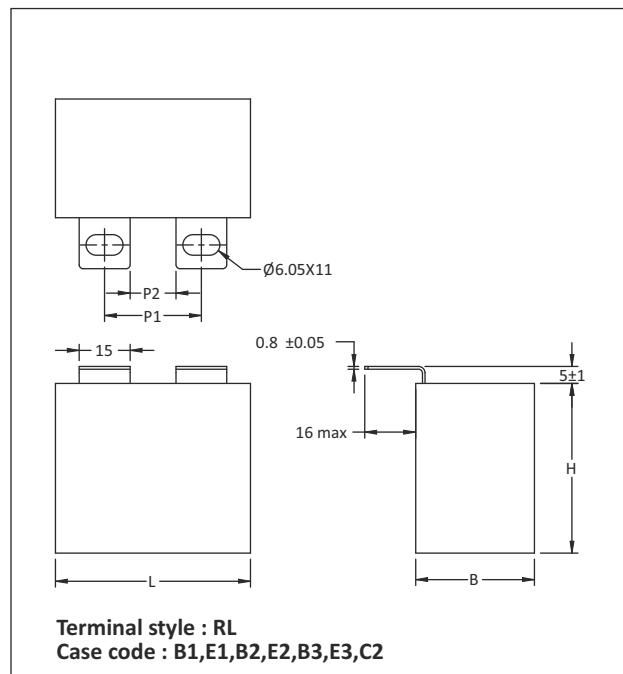
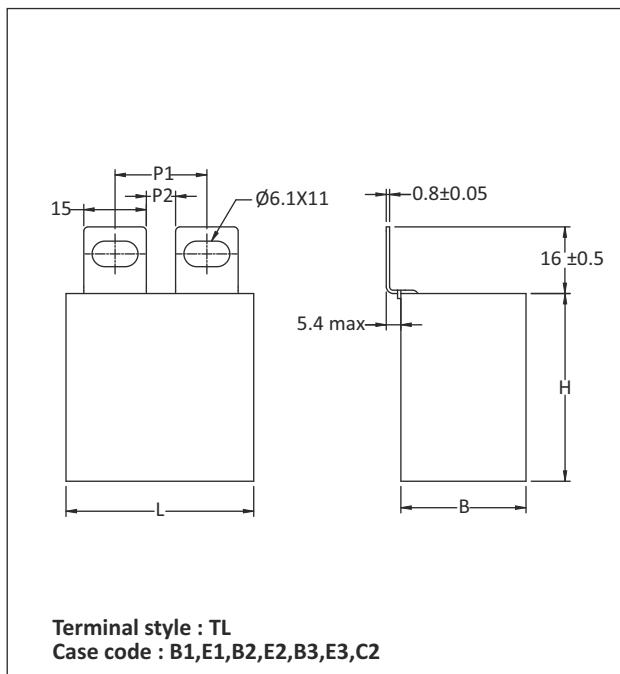
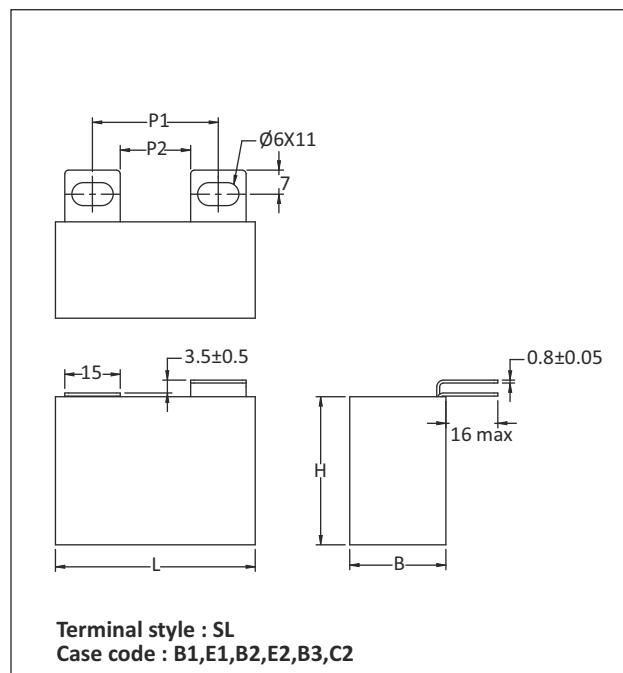
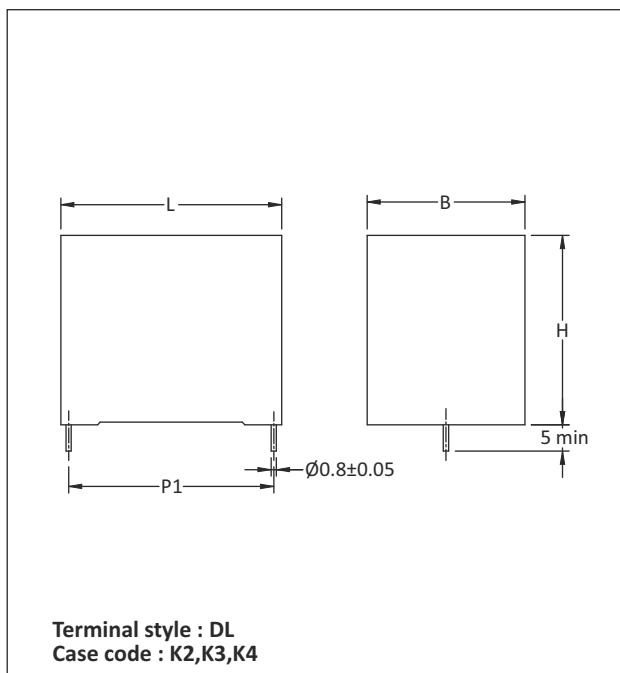


### Dimensions in mm

For details see Case Code table on page 16 & 17

KPF

## Capacitor Drawings and Terminal Styles

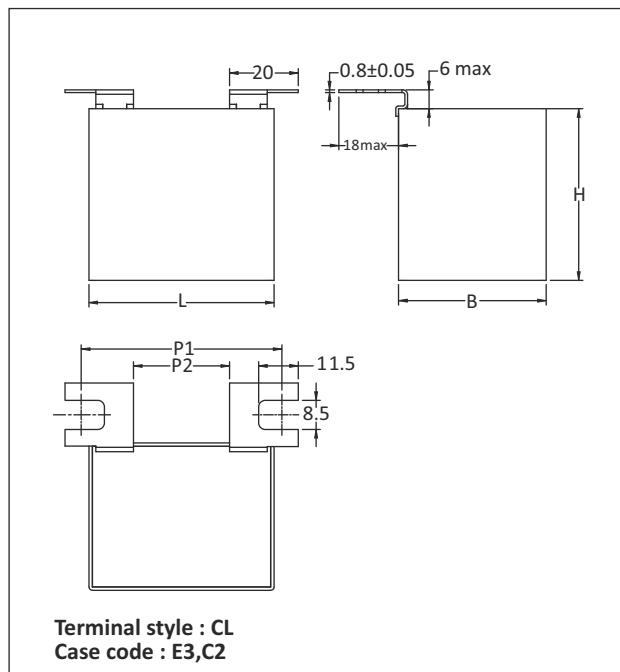
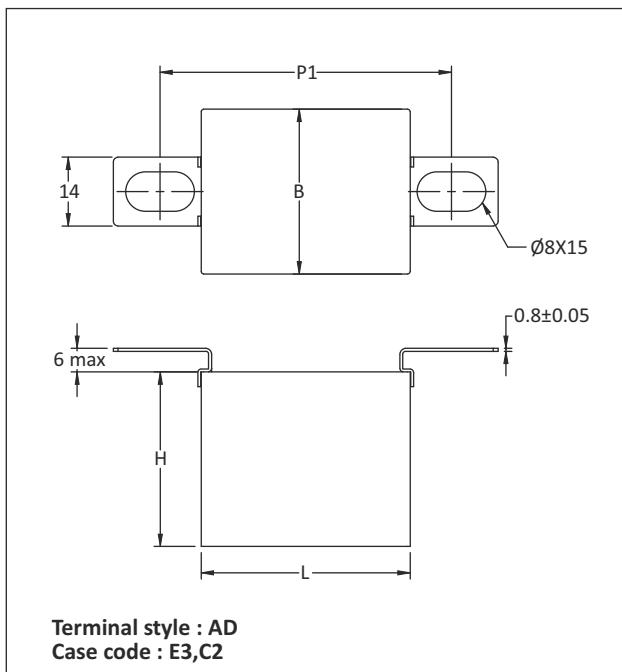
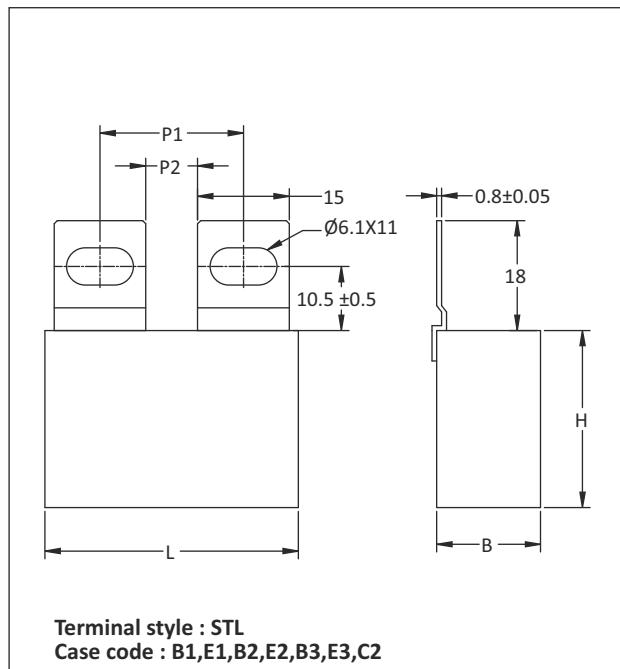
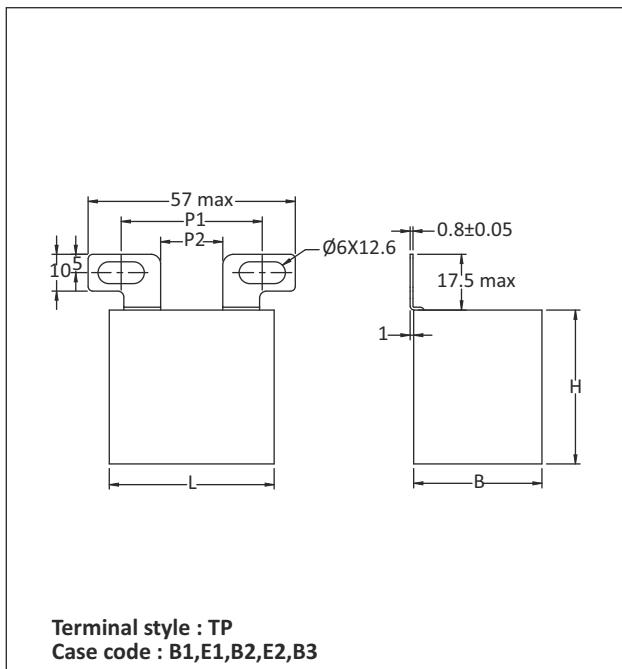


### Dimensions in mm

For details see Case Code table on page 16 & 17

KPF

## Capacitor Drawings and Terminal Styles

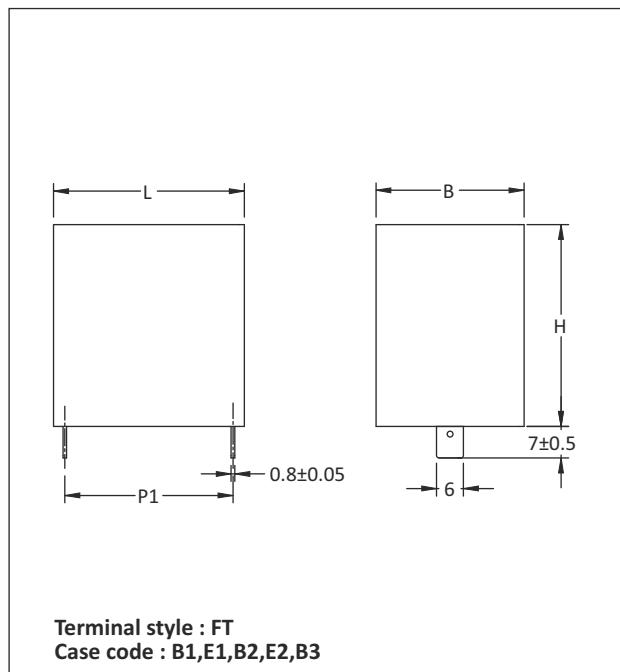
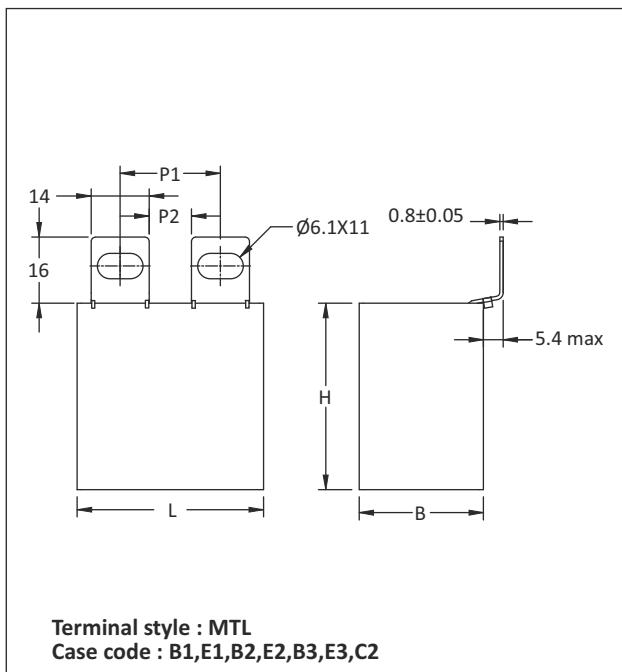
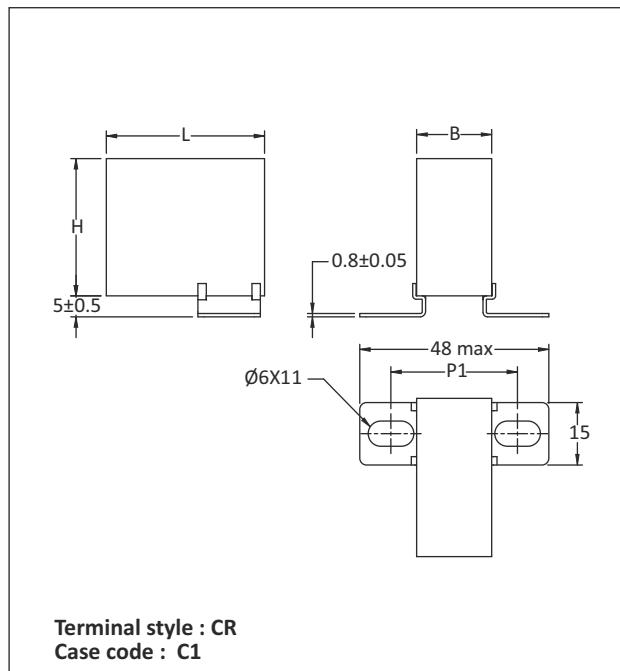
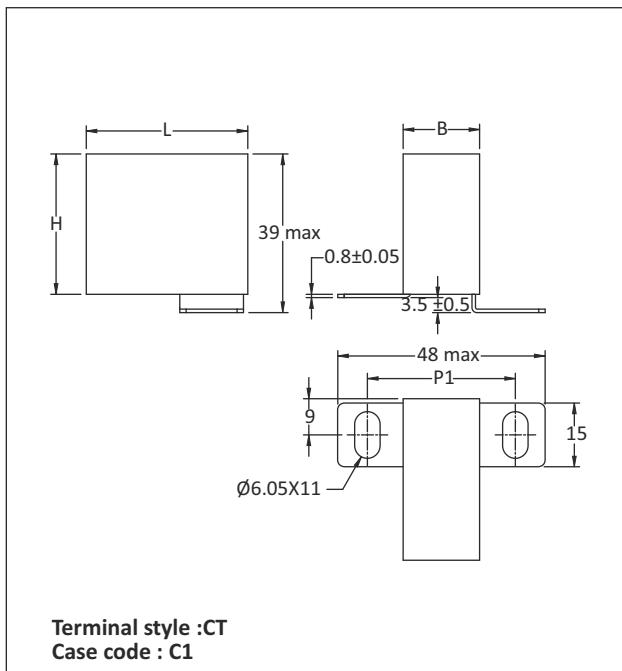


### Dimensions in mm

For details see Case Code table on page 16 & 17

KPF

## Capacitor Drawings and Terminal Styles

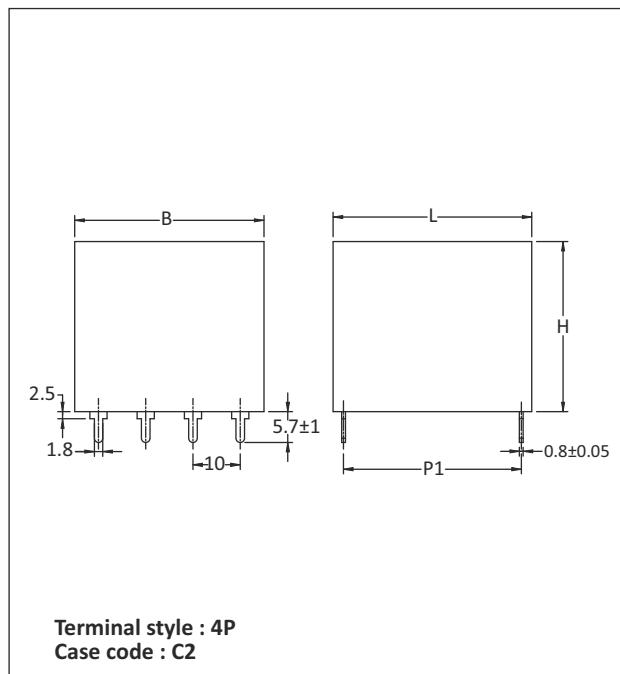
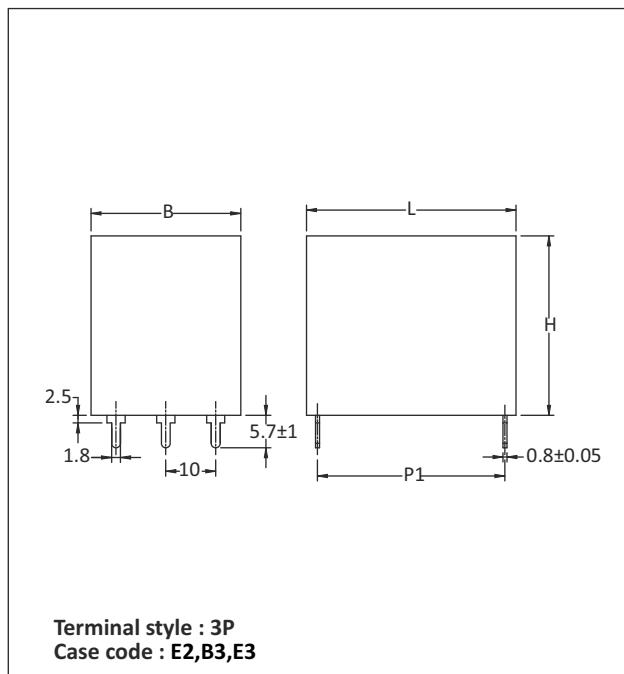
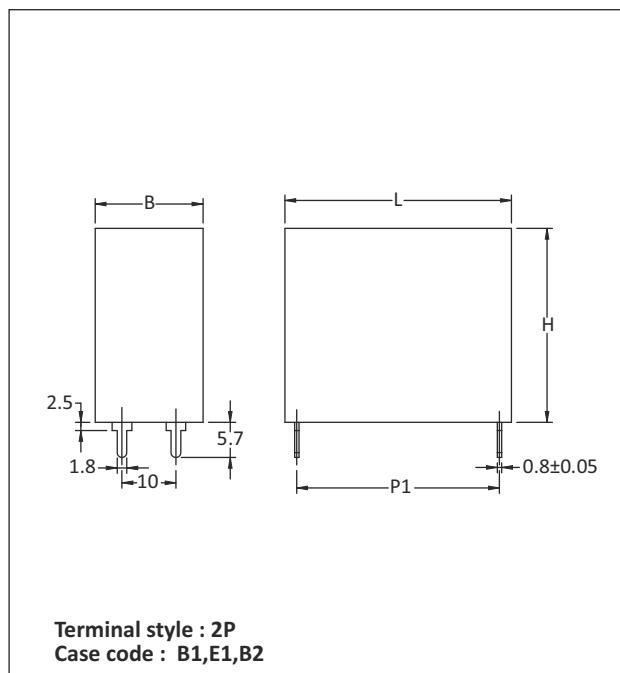
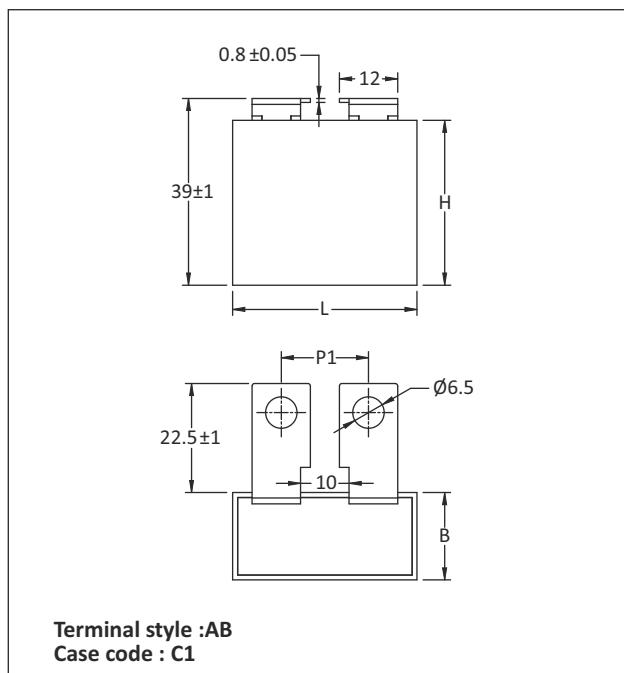


### Dimensions in mm

For details see Case Code table on page 16 & 17

KPF

## Capacitor Drawings and Terminal Styles

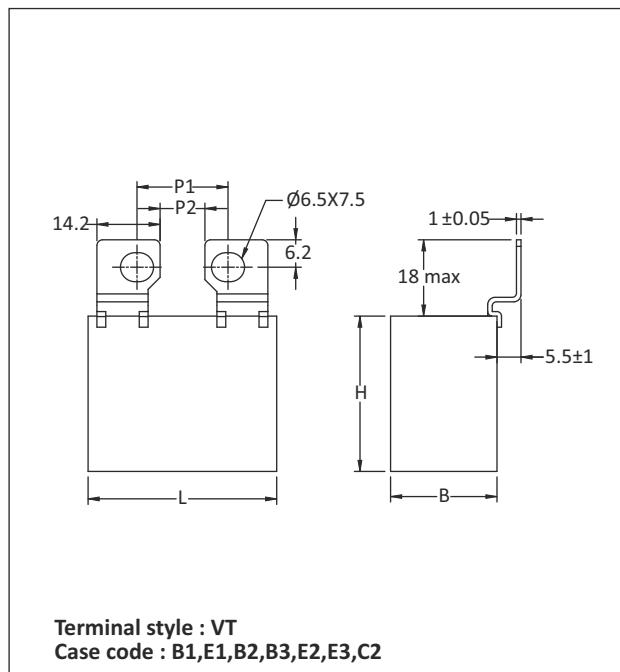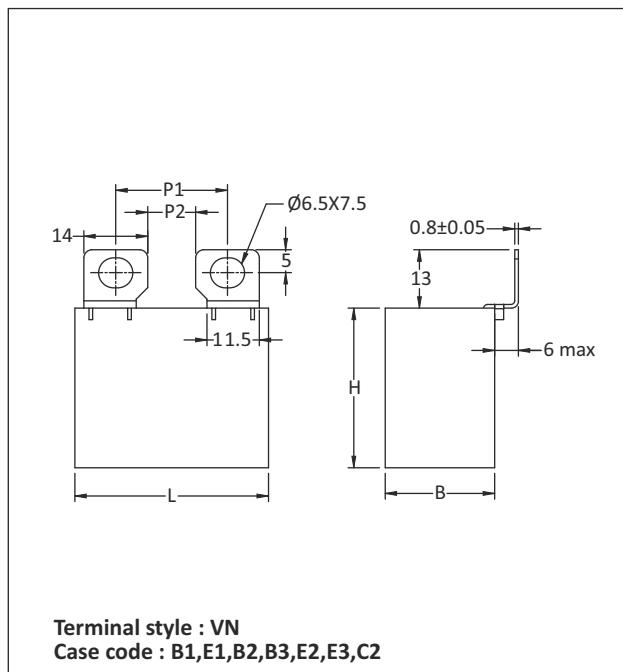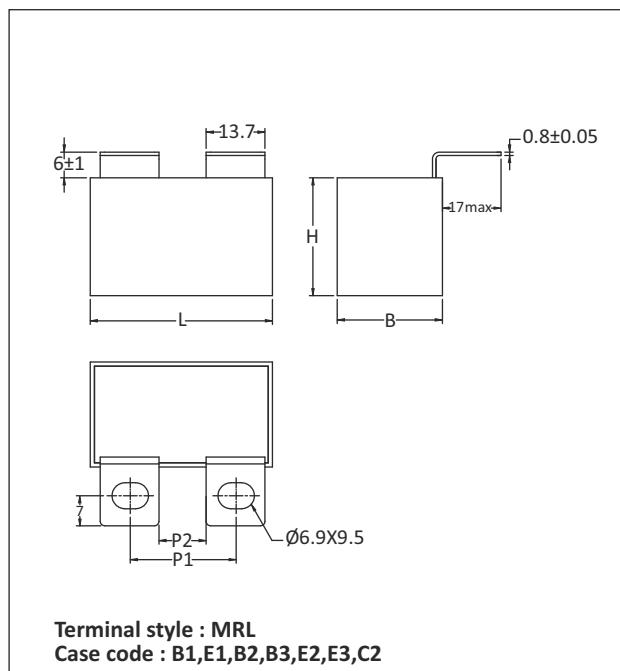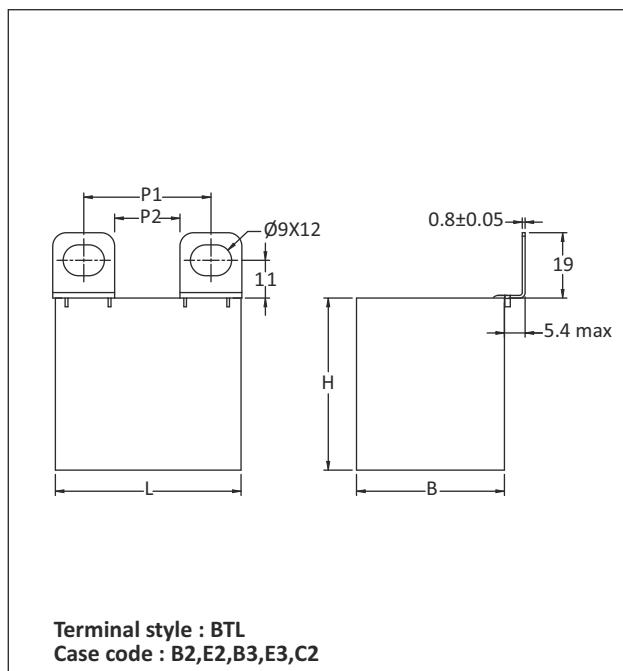


### Dimensions in mm

For details see Case Code table on page 16 & 17

KPF

## Capacitor Drawings and Terminal Styles

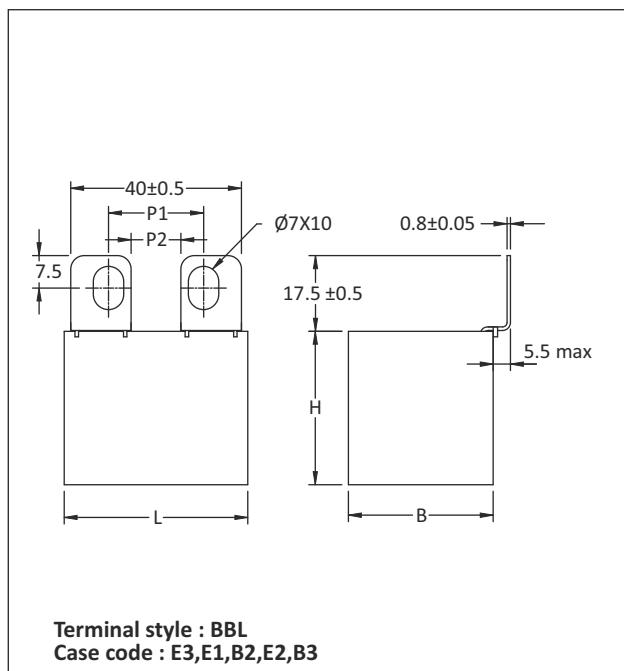

### Dimensions in mm

For details see Case Code table on page 16 & 17



## KPF

### Table of Case Codes and Dimensions

Case Code	Dimensions in mm*			P1	P2	Terminal Styles
	B+1	H+1	L+1	P+0.5		
C2	43.0	50.0	54.0	26.50	11.5	TL,RL,STL,SL,BTL
C2	43.0	50.0	54.0	25.0	11.5	MRL
C2	43.0	50.0	54.0	27.0	13.0	MTL
C2	43.0	50.0	54.0	68.5	—	AD
C2	43.0	50.0	54.0	55.0	28.0	CL
C2	43.0	50.0	54.0	22.0	11.1	VT
C2	43.0	50.0	54.0	23.0	9.0	VN
C1	18.0	33.0	38.0	32.0	—	CT
C1	18.0	33.0	38.0	18.0	—	AB
C1	18.0	33.0	38.0	31.0	—	CR

\* Refer to "Capacitor Drawing" on page 18 to 23

### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) :  $1.4 \times V_{rms} + V_{DC}$  should be less than rated VDC
4. MAX ESR = Typical ESR +30%



## KP-3C

### Technical Specifications

#### Physical Characteristics

▪ Dielectric material	Polypropylene film.
▪ Electrode material	Aluminium foil
▪ Winding construction	Extended foil electrodes and polypropylene film dielectric impregnated
▪ Enclosure	Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

▪ Capacitance range	0.1 MFD to 3.0 MFD
▪ Capacity tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K)
▪ Rated voltage VDC	1000, 1250, 1500, 2000
▪ Rated voltage VAC	480, 550, 630, 750
▪ Test voltage between terminals	2.5x rated voltage VDC for 10 seconds
▪ Test voltage terminal to case	3KVAC at 50Hz for 60 seconds
▪ Dissipation factor (Tan d)	$\leq 0.0005$ at 1 KHz and 25°C
▪ Temperature range	-40°C to +85°C
▪ Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute	C $\leq$ 0.33 MFD      C $\geq$ 100,000MΩ C > 0.33 MFD      C $\geq$ 30,000MΩ

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:





- The Company's symbol  followed by the words ALCON
- The capacitor grade viz KP-3C
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors





## KP-3C

### Capacitor Drawings and Terminal Styles

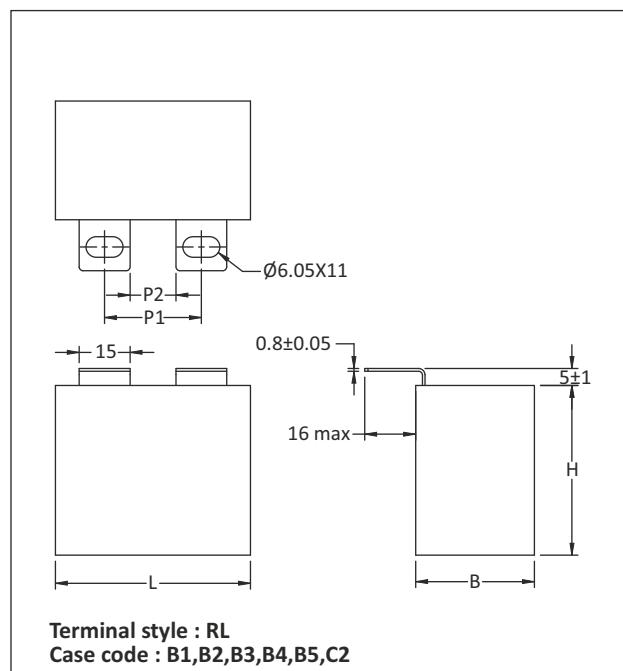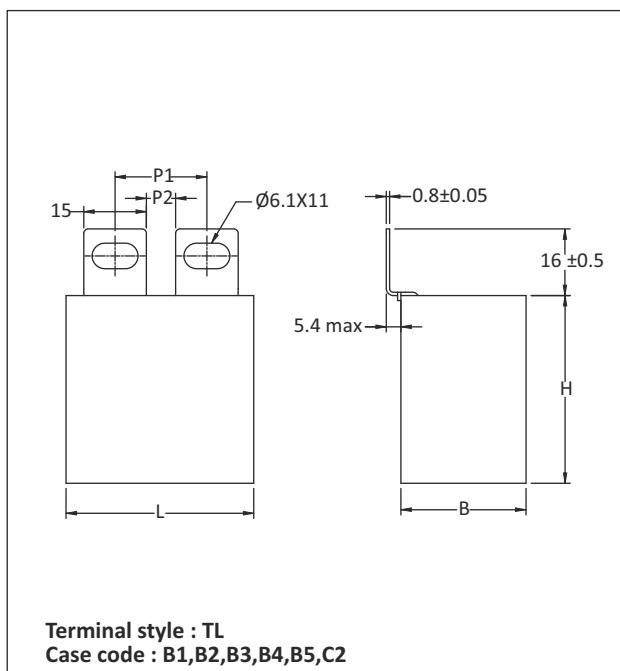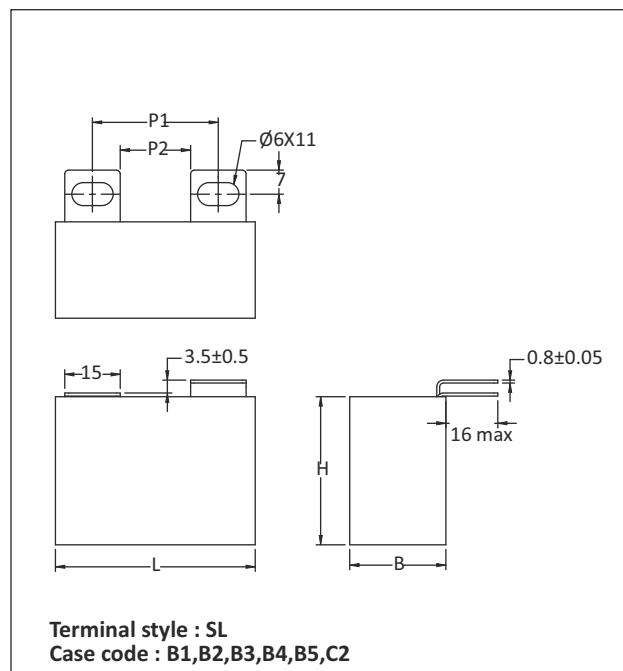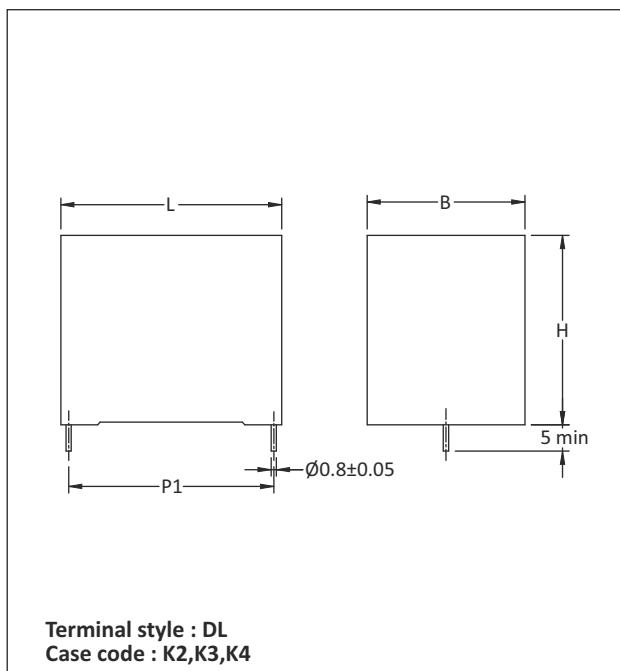


### Dimensions in mm


For details see Case Code table on page 34

## KP-3C


### Capacitor Drawings and Terminal Styles

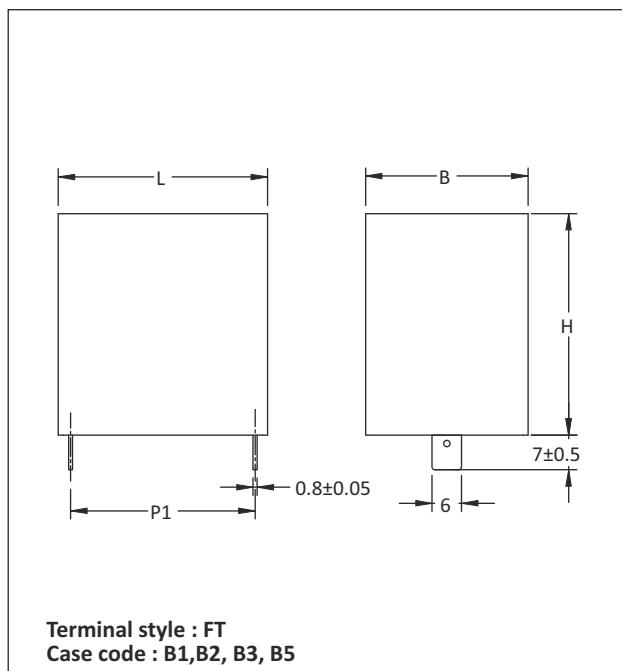


Terminal style : FT  
Case code : B1,B2, B3, B5

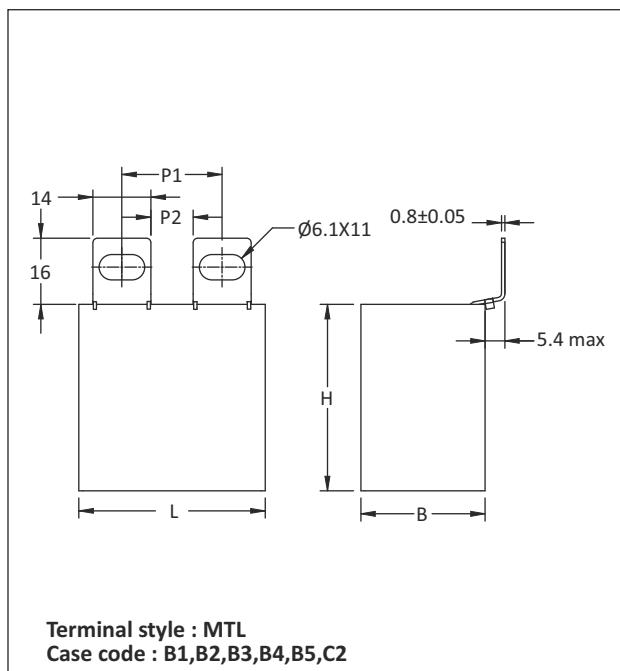

Terminal style : MTL  
Case code : B1,B2,B3,B4,B5,C2

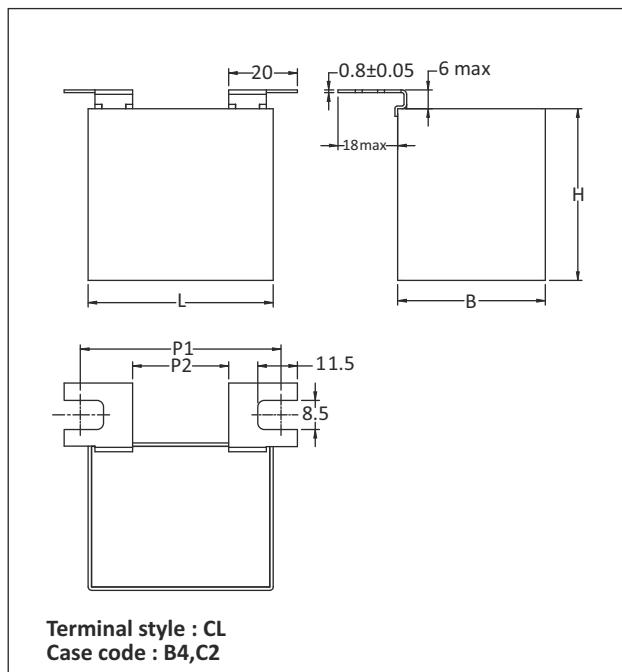

Terminal style : CL  
Case code : B4,C2

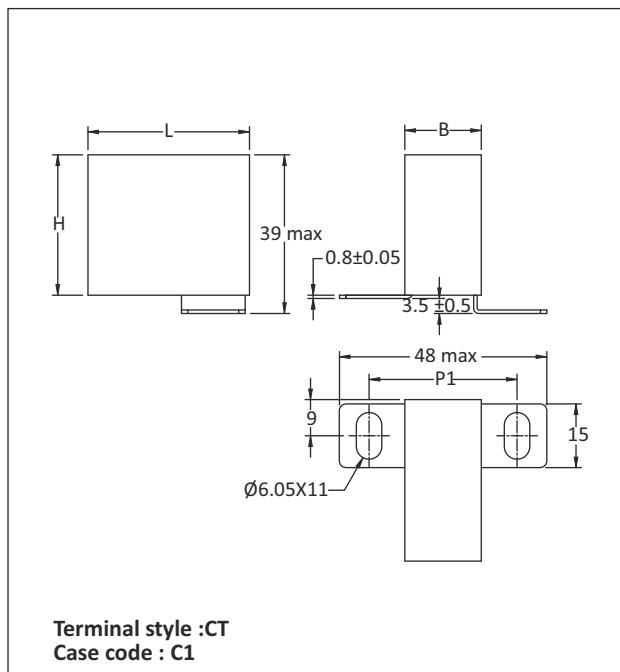





Terminal style : CT  
Case code : C1

### Dimensions in mm

For details see Case Code table on page 34

## KP-3C

### Capacitor Drawings and Terminal Styles

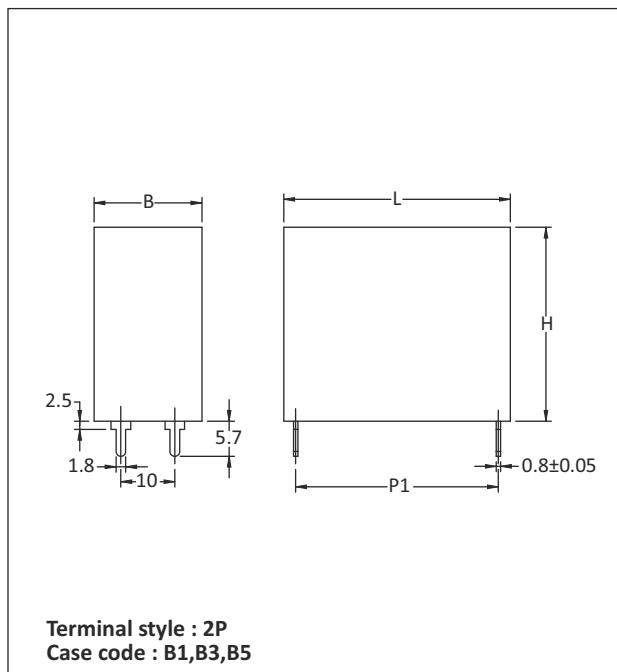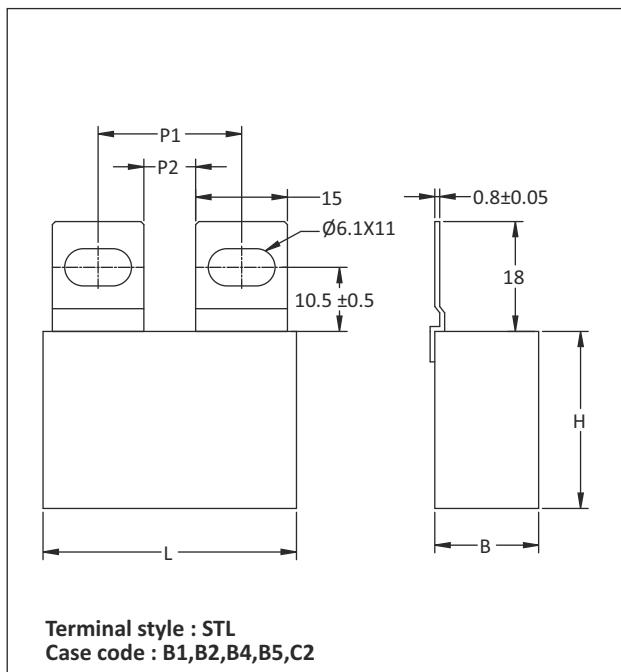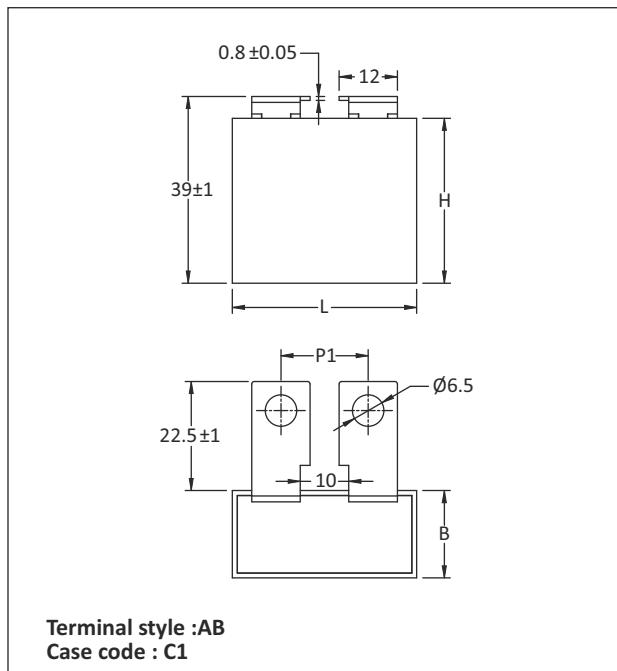
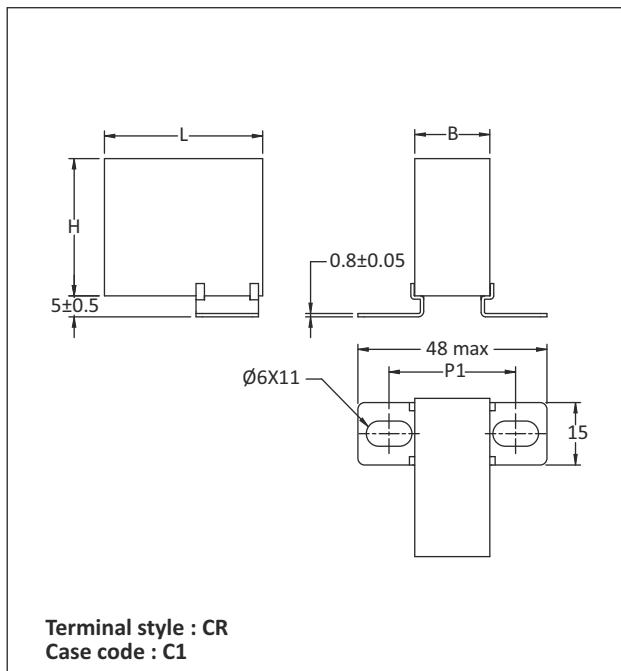


### Dimensions in mm

For details see Case Code table on page 34

## KP-3C

### Capacitor Drawings and Terminal Styles

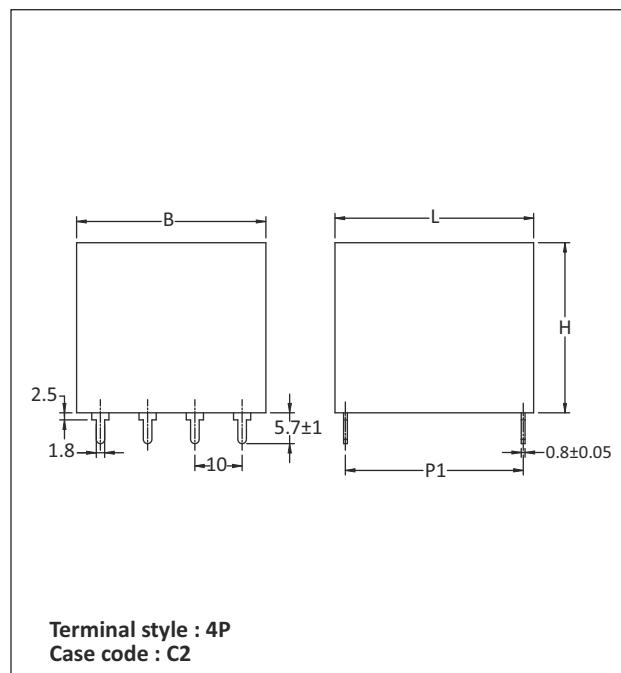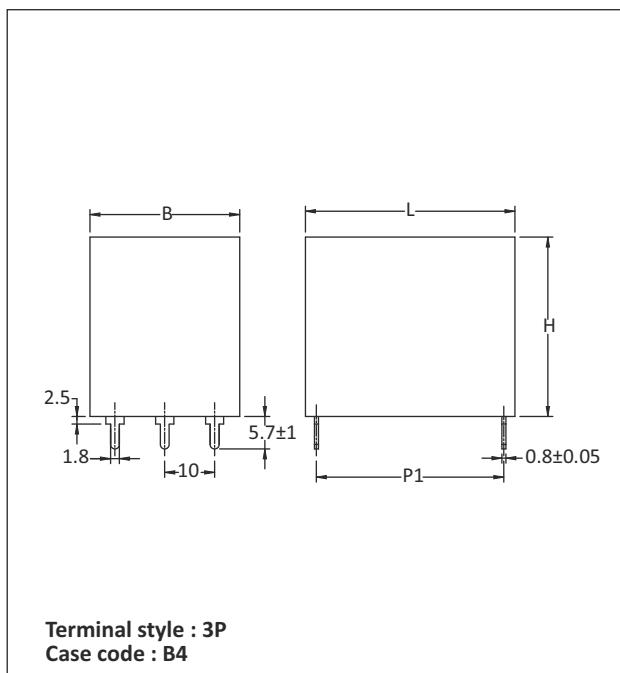

#### Dimensions in mm

For details see Case Code table on page 34

# KP-3C

## Table of Case Codes and Dimensions

Case Code	Dimensions in mm*			P1	P2	Terminal Styles
	B±1	H±1	L±1	P±0.5		
K2	11	20	32.0	27.5	--	DL
K3	13	22	32.0	27.5	--	DL
K4	14	24	32.0	27.5	--	DL
B1	17	29	41.5	32.5	-	DL,FT,2P
B1	17	29	41.5	39.0	-	DL,FT,2P
B1	17	29	41.5	23.5	8.5	TL,RL,STL,SL
B1	17	29	41.5	24.5	10.5	MTL
B2	24	38	45.0	23.5	8.5	TL,RL,STL,SL
B2	24	38	45.0	24.5	10.5	MTL
B3	30	45	45.0	39.0	-	FT,2P
B3	30	45	45.0	27.0	13.0	MTL
B3	30	45	45.0	26.5	11.5	TL,RL,STL,SL
B4	30	50	54.0	27.0	11.5	TL,RL,STL,SL
B4	30	50	54.0	48.0	-	3P
B4	30	50	54.0	55.0	28.0	CL
B4	30	50	54.0	27.0	13.0	MTL
B5	28	30	45.0	27.0	11.5	TL,RL,STL,SL
B5	28	30	45.0	27.0	13.0	MTL
B5	28	30	45.0	39.0	-	FT,2P
C1	18	33	38.0	33.0	-	CR
C1	18	33	38.0	31.0	-	CT
C1	18	33	38.0	18.0	-	AB
C2	43	50	54.0	26.5	11.5	TL,RL,STL,SL
C2	43	50	54.0	27.0	13.0	MTL
C2	43	50	54.0	55.0	28.0	CL
C2	43	50	54.0	48.5	-	4P

\* Refer to "Capacitor Drawings" on page 30 to 33

### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) :  $1.4 \times V_{rms} + V_{DC}$  should be less than rated VDC



## MKRS

### Technical Specifications

#### Physical Characteristics

- Dielectric material Polypropylene film.
- Electrode material Metallized polypropylene film.
- Winding construction Metallized polypropylene dielectric internal series connection
- Enclosure Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

▪ Capacitance range	0.1 MFD to 2.0 MFD
▪ Capacity tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K)
▪ Rated voltage VDC	600, 700, 1000, 1200, 1500, 2000, 2500
▪ Test voltage between terminals	1.5 x rated voltage VDC for 2 seconds
▪ Test voltage terminal to case	3KVAC at 50Hz for 60 seconds
▪ Dissipation factor (Tan d)	$\leq 0.0005$ at 1 KHz and 25°C
▪ Temperature range	-40°C to +105°C
▪ Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute	$C \leq 0.33$ MFD $> 100,000 M\Omega$ $C > 0.33$ MFD $\geq 30,000 M\Omega$

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company's symbol  followed by the words ALCON
- The capacitor grade viz MKRS
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors





## MP-4A

### Technical Specifications

#### Physical Characteristics

▪ Dielectric material	Polypropylene film
▪ Electrode material	Double metallized polyester and metallized polypropylene film
▪ Winding construction	Extended double metallized polyester electrodes with metallized polypropylene dielectric internal series connection
▪ Terminal	Tinned copper
▪ Enclosure	UL94-V0 Tape wrap with thermosetting resin end fill

#### Electrical Characteristics

▪ Capacitance range	0.015μF to 5μF
▪ Capacity tolerance	±5%(J), ±10%(K)
▪ Rated voltage VDC	600, 850, 1000, 1200, 1600, 2000, 2500, 3000
▪ Rated voltage VAC	275, 450, 500, 500, 630, 630, 700, 750,
▪ Test voltage between terminals	1.6 x rated VDC for 10 secs.
▪ Test voltage terminal to case	3 KV AC
▪ Dissipation factor	< 0.0005 at 1 KHz and + 25°C
▪ Insulation resistance	> 100,000 x μF at 100 VDC after 2 min
▪ Temperature range	-55°C to +105°C Upto + 85°C full rated voltage can be applied. However, at +105°C only half the rated voltage can be applied.

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company name in words ALCON
- The capacitor grade viz MP-4A
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing date code
- Design reference number on non-standard capacitors








## MP-4A

### Capacitor Drawing and Terminal Style

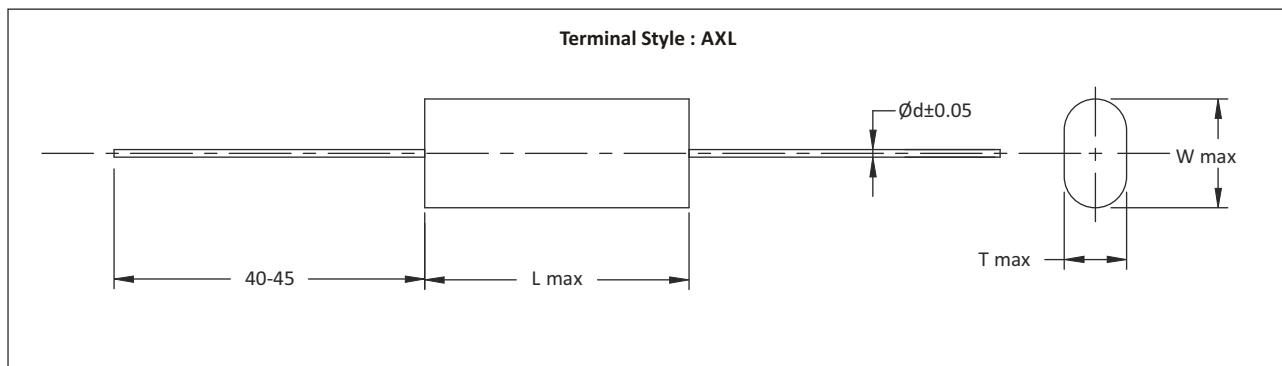


Dimensions in mm

### Precaution


1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) :  $1.4 \times V_{rms} + V_{DC}$  should be less than rated VDC
4. MAX ESR = Typical ESR +30%

## KPF-9

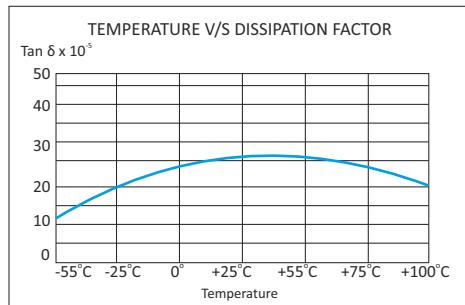



### Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

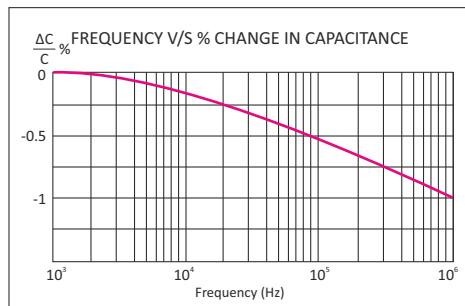

### Construction



Extended foil electrodes with Metallized polypropylene dielectric internal series connection

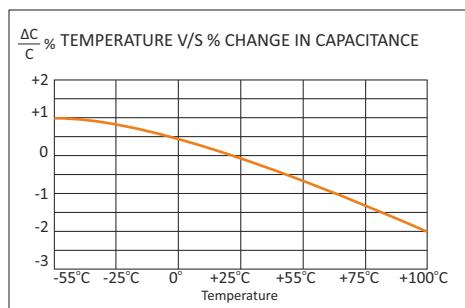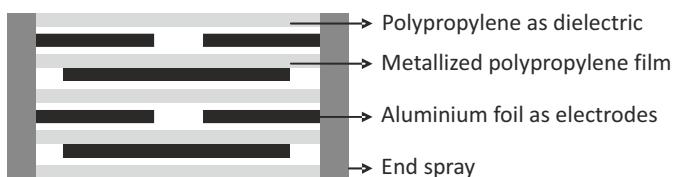

### Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- “Turn On” and “Turn Off” snubber circuits
- Energy conversion and control in power electronics
- Protection circuits in SMPS

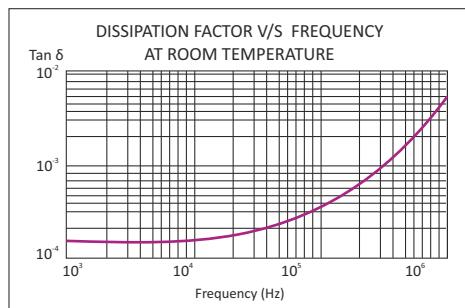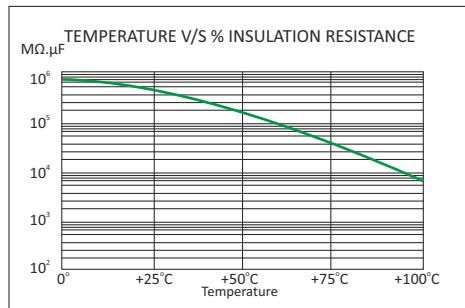

## KPF-9

### Technical Specifications

#### Physical Characteristics

- Dielectric material Polypropylene film.
- Electrode material Aluminum foil and Metallized polypropylene film
- Winding construction Extended foil electrodes with Metallized polypropylene dielectric internal series connection
- Terminal Tinned copper
- Enclosure UL 94 V-0 polyester tape wrap with thermosetting resin end-fill

#### Electrical Characteristics

▪ Capacitance range	0.068 MFD to 1.5MFD
▪ Capacity tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K)
▪ Rated voltage VDC	850, 1000, 1200, 1600, 2000, 2500, 3000
▪ Rated voltage VAC	450, 500, 500, 630, 630, 750, 750,
▪ Test voltage between terminals	1.6 x rated voltage VDC for 10 seconds
▪ Test voltage terminal to case	3KVAC at 50Hz for 60 seconds
▪ Dissipation factor (Tan d)	$\leq 0.0005$ at 1 KHz and 25°C
▪ Temperature range	-40°C to +85°C
▪ Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute	C $\leq$ 0.33 MFD $\geq$ 100,000MΩ C > 0.33 MFD $\geq$ 30,000MΩ

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company name in words ALCON
- The capacitor grade viz KPF-9
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing date code
- Design reference number on non-standard capacitors





## KPF-9

### Standard Capacitor Values


#### Working Voltage 3000 VDC (750 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 70°C Amps	Typical ESR at 100KHz mΩ	Ordering Code
	T max	W max	L max	d					
0.015	8.5	15.5	34.0	1.0	BA	1500	22.00	3.00	SI0U0153000AI0BA0AXLK01
0.022	9.2	16.0	34.0	1.0	PV	1500	33.00	4.20	SI0U0223000AI0PV0AXLK01
0.033	11.0	17.0	34.0	1.0	BB	1500	49.00	6.10	SI0U0333000AI0BB0AXLK01
0.047	12.0	19.0	46.0	1.0	BC	1200	56.00	6.80	SI0U0473000AI0BC0AXLK01
0.068	14.0	21.0	46.0	1.0	BD	1200	81.00	7.90	SI0U0683000AI0BD0AXLK01
0.100	15.0	24.0	46.0	1.2	PZ	1200	120.00	9.30	SI0U103000AI0PZOAXLK01
0.150	18.0	27.0	46.0	1.2	BE	1200	180.00	12.00	SI0U153000AI0BEOAXLK01

Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing" below

### Capacitor Drawing and Terminal Style

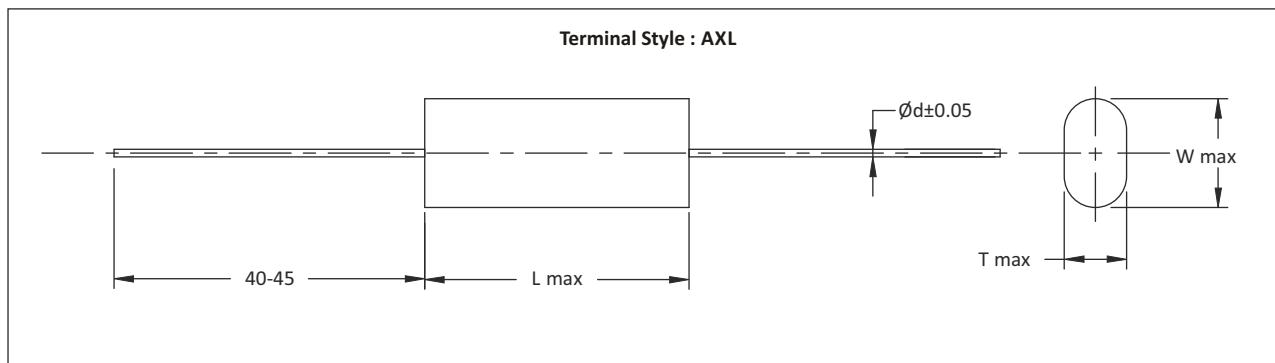


Dimensions in mm

### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) :  $1.4 \times V_{rms} + V_{DC}$  should be less than rated VDC
4. MAX ESR = Typical ESR +30%

KP-6



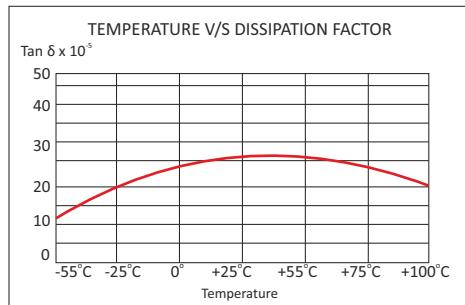


## Highlights

- High DV/DT
- Low ESR
- Low loss polypropylene dielectric
- Impregnated elements eliminate corona
- Flame retardant UL94 - V0, ROHS compliant

## Construction



Extended foil electrodes and polypropylene film dielectric impregnated

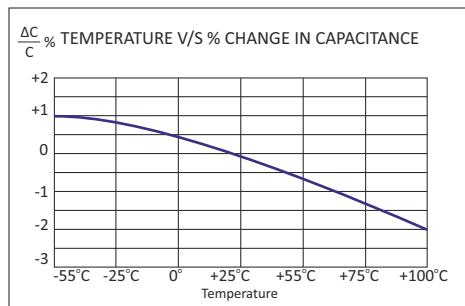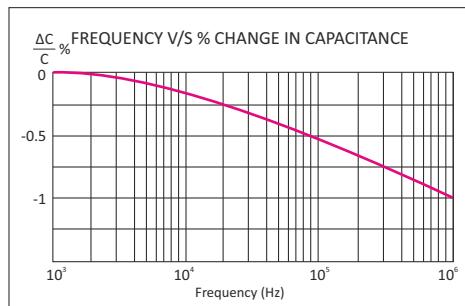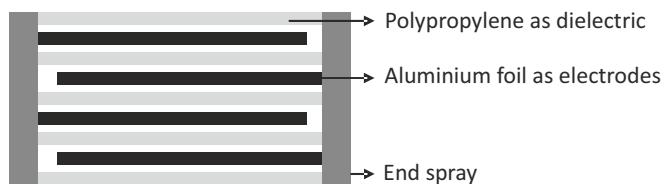

## Applications

These capacitors are used in high voltage and high current applications such as:

- Snubber networks
- Energy conversion and control in power electronics
- Noise suppressors in switching circuits

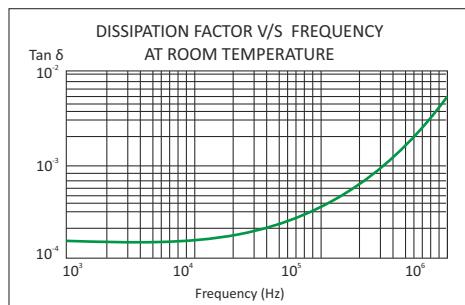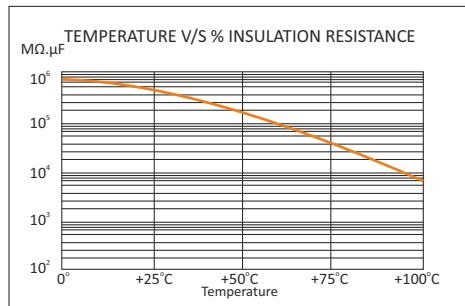

## KP-6

### Technical Specifications

#### Physical Characteristics

▪ Dielectric material	Polypropylene film.
▪ Electrode material	Aluminium foil
▪ Winding construction	Extended foil electrodes and polypropylene film dielectric impregnated
▪ Terminals	Tinned copper
▪ Enclosure	Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

▪ Capacitance range	0.01 MFD to 2.0 MFD
▪ Capacity tolerance	$\pm 5\%(J)$ , $\pm 10\%(K)$
▪ Rated voltage VDC	850, 1200, 2000, 2500, 3000
▪ Rated voltage VAC	450, 500, 630, 700, 750
▪ Test voltage between terminals	Working voltage $\leq$ 2000VDC 2.5 x rated voltage VDC for 2 seconds Working voltage $\geq$ 2000VDC 2.0 x rated voltage VDC for 2 seconds
▪ Dissipation factor (Tan d)	$\leq 0.0005$ at 1KHz and 25°C
▪ Temperature range	- 25°C to +85°C
▪ Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute	C $\leq$ 0.33 MFD $\geq$ 50,000MΩ C > 0.33 MFD $\geq$ 30,000MΩ

#### Marking on Capacitors


Each capacitor will have the following information printed on it, sequentially:

- The Company name in words ALCON
- The capacitor grade viz KP-6
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors





### Capacitor Drawing and Terminal Style

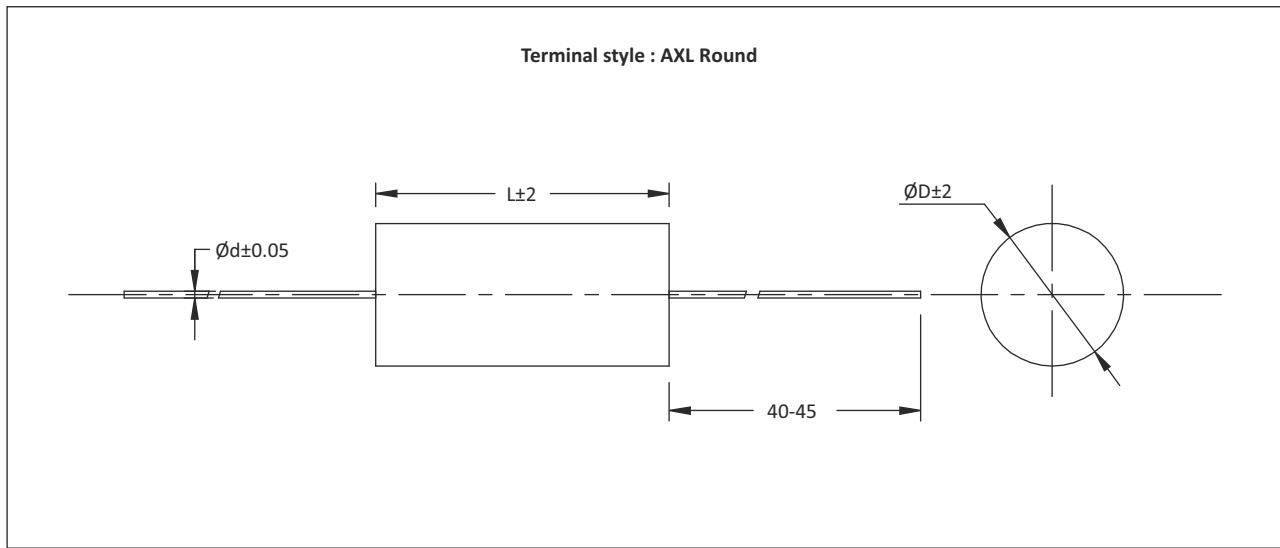


Dimensions in mm

#### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) :  $1.4 \times V_{rms} + V_{DC}$  should be less than rated VDC

## Part Number System

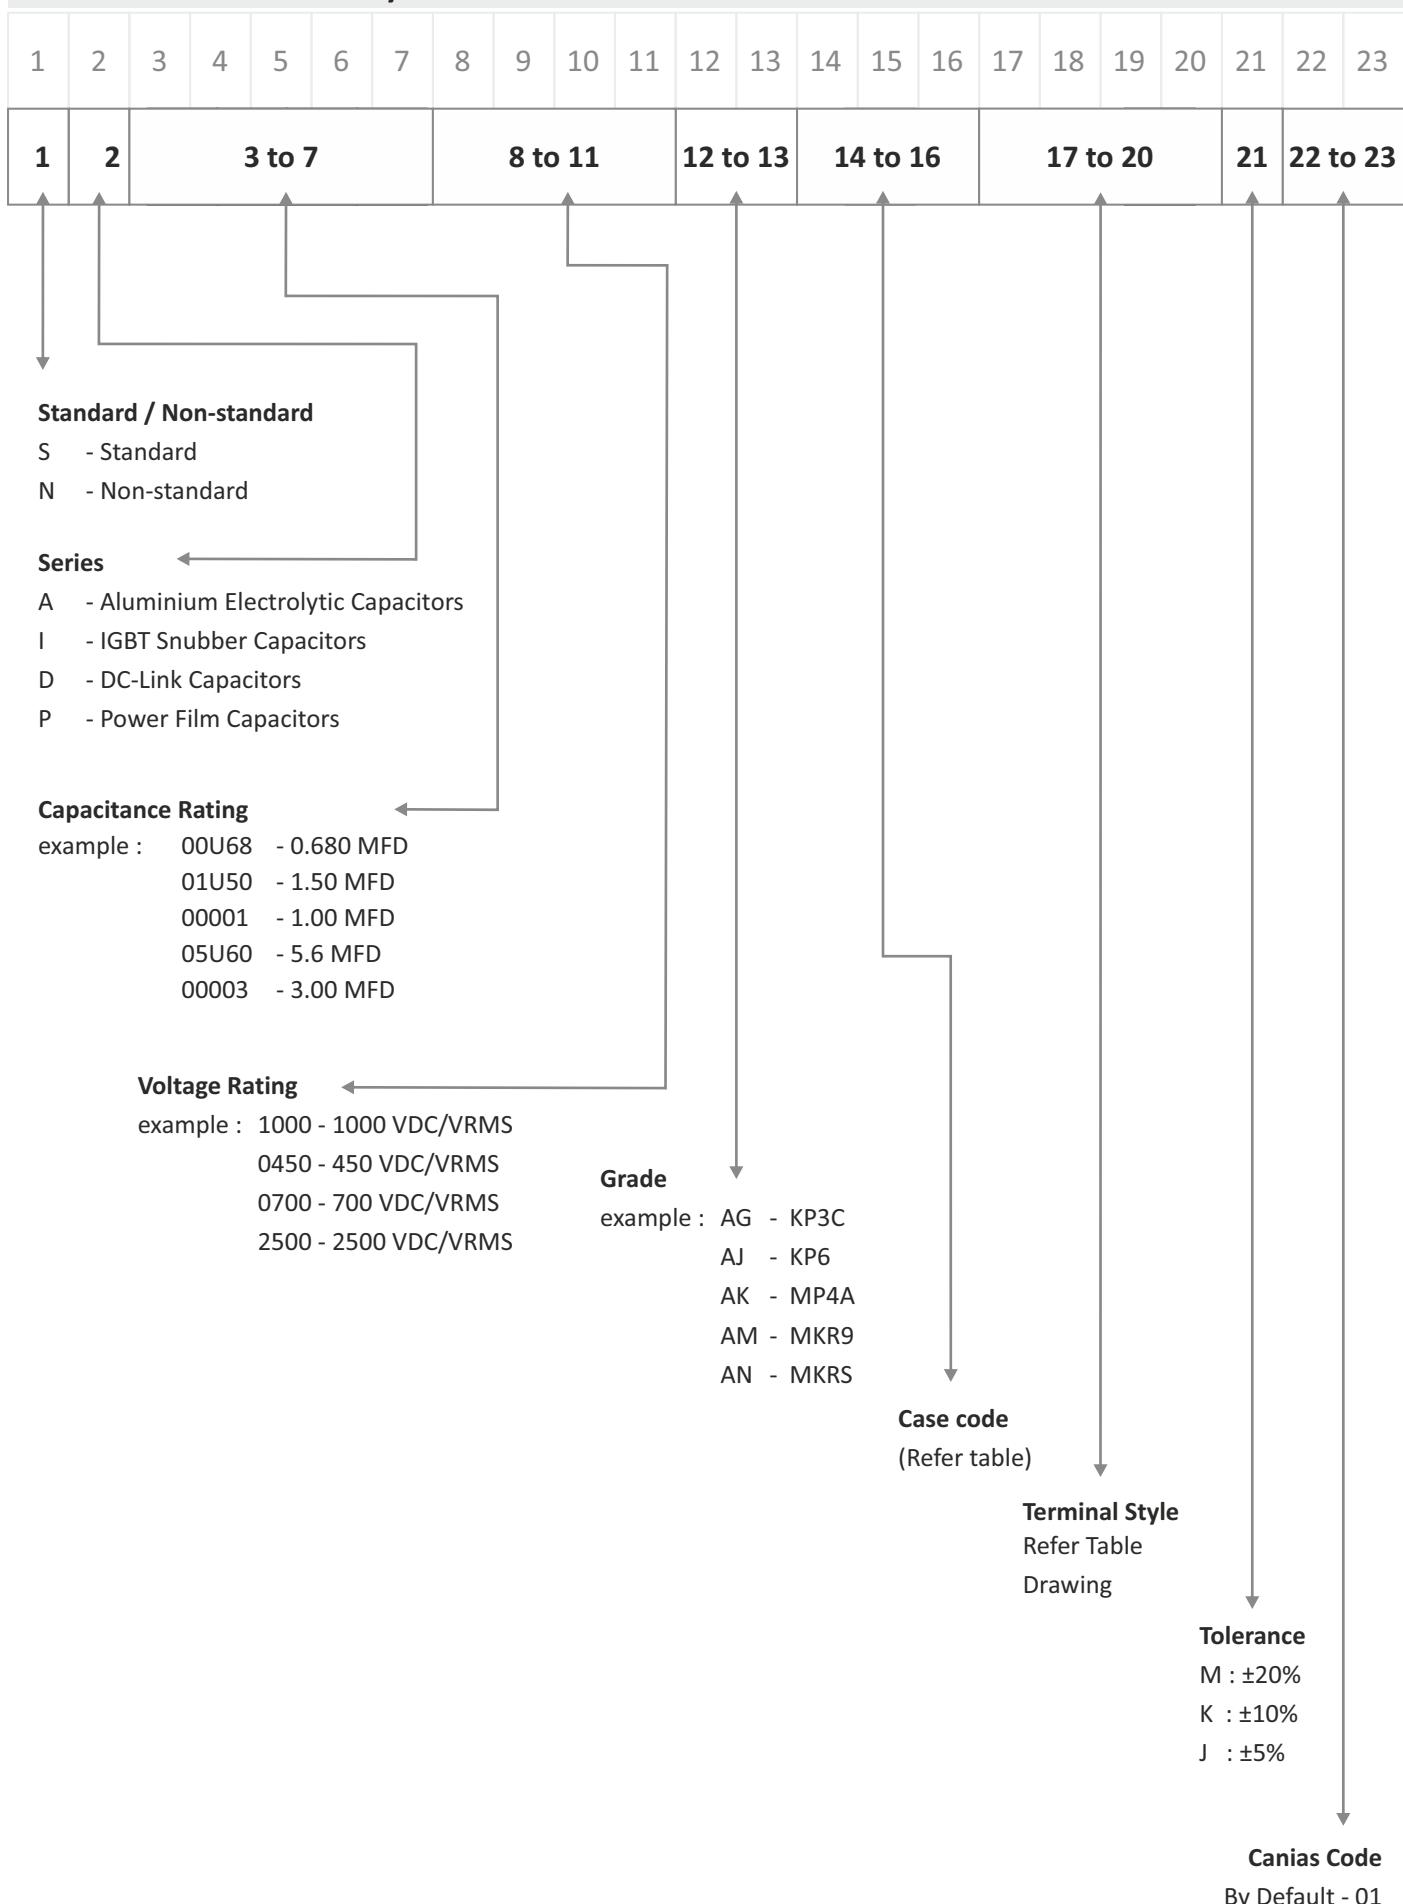

## Cautions For Proper Use Of Film Capacitors

### SAFETY INSTRUCTION

- Do not exceed the upper category temperature (UCT).
- Do not apply any mechanical stress to the capacitor terminals.
- Avoid any compressive, tensile or flexural stress.
- Do not move the capacitor after it has been assembled
- Do not exceed the specified torque limits during assembly.
- Avoid external energy inputs, such as fire or electricity.
- Avoid overload of the capacitors.
- Consult us if application is with severe temperature and humidity condition.
- There are no serviceable or repairable parts inside the capacitor. Opening the capacitor or any attempts to open or repair the capacitor will void the warranty and liability of ALCON

### DISPOSAL

For disposal do either of the followings.

1. Incineration (at high temperature over 800°C) after piercing or crushing capacitor body.
2. Consignment to specialists of industrial waste. As per the compliance prescribed by the law.



# IGBT SNUBBER CAPACITORS

## Notes



# IGBT SNUBBER CAPACITORS

## Notes



# IGBT SNUBBER CAPACITORS

## Notes



## Other Products



### Power Film Capacitors- High and Medium Frequency

**Capacitance Range**

- 0.010 MFD to 85 MFD

**Max Power**

- 100 KVAR to 1500 KVAR

**Frequency Range**

- 5.2 KHz to 1900 KHz

**Max Current**

- Up to 3000 Amps

#### Typical Applications

Induction Heating, Plasma Generators, Medical Equipment, Wireless EV Chargers, Magnetisers and Traction Equipment.



### DC-Link Capacitors – Screw terminal and PCB mounting

**Capacitance Range**

- 1 MFD to 7400 MFD

**Rated Voltage Range**

- 400 VDC to 3000 VDC

**Mounting Pitch**

- 32, 45, 50 mm (for screw terminal)

27.5, 37.5, 52.5 mm (for PCB mounting)

**Frequency Range**

- 10 KHz to 100 KHz

#### Typical Applications

High Frequency Ripple Filtering in UPS, AC Drives, High Power IGBT Inverter, Induction Heating Equipment, Traction & Medical Equipment.



### Aluminium Electrolytic Capacitors

**Capacitance Range**

- 330 MFD to 470000 MFD

**Rated Voltage Range (VDC)**

- 50 VDC to 550 VDC

**Can Sizes**

- 35 mm Ø x 80 L mm to 120 mm Ø x 240 L mm

**Temperature Rating**

- 40°C to + 70°C

40°C to + 85°C

40°C to + 105°C

#### Typical Applications

High ripple current applications like PWM Inverters, High KVA online UPS, Frequency converters, AC drives, High reliability power supplies, solar and wind inverters. HED range is designed for large instant energy discharge applications like Laser, X-ray equipment, welding machines, magnetisers & other pulse discharge applications



#### • AUTHORISED DISTRIBUTOR •

