

# HIGH DISCHARGE RATE ENERGY-STORAGE METALIZED POLYESTER FILM CAPACITORS

TYPE 684P



## FEATURES

- Low cost
- Light weight
- 10 PPS discharge rate
- Rugged wrap & fill construction
- Long life

### MAJOR APPLICATIONS:

Flash, laser, strobe, light bar, aluminum electrolytic alternative.

## PHYSICAL CHARACTERISTICS

### CONSTRUCTION:

Non-inductive wound metalized polyester.

### CASE:

Flame retardant tape wrap and epoxy endfill.

### LEAD MATERIAL:

Solder coated copper wire No. 16 AWG.

### LEAD STRENGTH:

Capable of withstanding a five pound pull force on lead axis.

### MARKING:

Dearborn trademark, type or catalog number, capacitance, tolerance and voltage.

## ELECTRICAL SPECIFICATIONS

### CAPACITANCE RANGE:

5  $\mu\text{F}$  to 175  $\mu\text{F}$

### CAPACITANCE TOLERANCE:

+20% -10%,  $\pm 10\%$

### OPERATING TEMPERATURE:

0°C to +40°C

### DC VOLTAGE RANGE:

400 VDC to 1,000 VDC

### DISSIPATION FACTOR:

1.0% maximum

### VOLTAGE TEST:

150% of rated voltage for 2 minutes

### DISCHARGE RATE:

10 discharge per sec. maximum

### INDUCTANCE:


0.03 to 0.05  $\mu\text{H}$  typical at resonance

### INSULATION RESISTANCE:

Measure at rated voltage, not to exceed 500 VDC, after a 2 minute charge.

- At +25°C, 25,000 Megaohm-Microfarads

## DIMENSIONS (in inches)

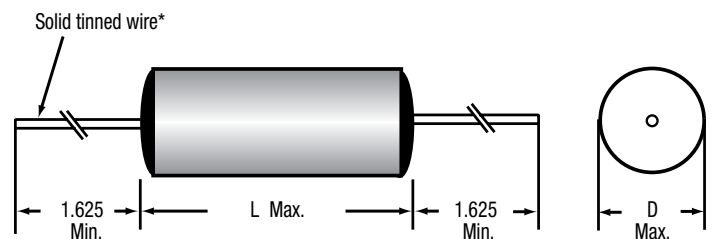

# HIGH DISCHARGE RATE ENERGY-STORAGE METALIZED POLYPROPYLENE FILM CAPACITORS

## STANDARD RATINGS

μF	Rated Joules	Dimensions (in inches)		Max. Peak Discharge Current (in Amps)
		D Max.	L Max.	
<b>400 VDC</b>				
5.0	0.4	0.807	2.062	65
10.0	0.8	1.032	2.062	130
25.0	2	1.502	2.062	300
50.0	4	2.043	2.062	600
75.0	6	2.148	2.531	700
100.0	8	1.759	4.500	450
150.0	12	2.112	4.500	700
175.0	14	2.267	4.500	800
<b>750 VDC</b>				
10.0	2.8	1.204	2.062	160
25.0	7.0	1.782	2.062	400
50.0	14	2.100	2.562	550
75.0	21.1	2.078	3.515	550
100.0	28.1	2.060	4.500	550
<b>1,000 VDC</b>				
10.0	5	1.573	2.062	230
25.0	12.5	2.015	2.531	400
50.0	25.0	2.211	3.515	500
75.0	37.5	2.291	4.500	530

# GENERAL INFORMATION ON POLYESTER CAPACITORS

## GENERAL INFORMATION

One of the principle characteristics of these capacitors is their small size. This is due to the high dielectric constant and high dielectric strength of the film. They also have superior self-healing properties. They may be used in AC sine wave or non sine wave applications.

## GENERAL ELECTRICAL, PHYSICAL, AND ENVIRONMENTAL CHARACTERISTICS

### ELECTRICAL CHARACTERISTICS:

Capacitance, dissipation factor, insulation resistance, and dielectric strength shall be measured as specified.

### PHYSICAL CHARACTERISTICS:

The lead strength shall be measured as specified.

### ENVIRONMENTAL CHARACTERISTICS:

#### Vibration Test:

Units shall be tested as required. As a result of the test no mechanical damage, short, open or intermittent circuit.

### MOISTURE RESISTANCE:

The hermetically sealed units shall be tested.

#### As a result of the test there shall be:

- No visible damage
- Max.  $\Delta C$  of  $\pm 10\%$
- Min. IR = 50% of initial limit
- Max. DF = 2.0%

### HUMIDITY TEST:

The non-hermetically sealed units shall be tested.

#### As a result of the test there shall be:

- No visible damage
- Max.  $\Delta C$  of  $\pm 10\%$
- Min. IR = 20% of initial limit
- Max. DF = 2.0%

### DC LIFE:

125% of rated voltage at 85°C (125°C for Type 218P) for 250 hours except for Type 430P units rated at 1,000 VDC or greater which shall be tested at 100% of rated voltage at 40°C for 1,000 hours.


#### As a result of the test there shall be:

- No permanent open or short circuit
- No visible damage
- Max.  $\Delta C$  of  $\pm 10\%$
- Min. IR = 50% of initial limit
- Max. DF = 2.0%


# GENERAL INFORMATION ON POLYESTER CAPACITORS

## CHARACTERISTICS


### CAPACITANCE CHANGE VS. TEMPERATURE - METALIZED POLYESTER

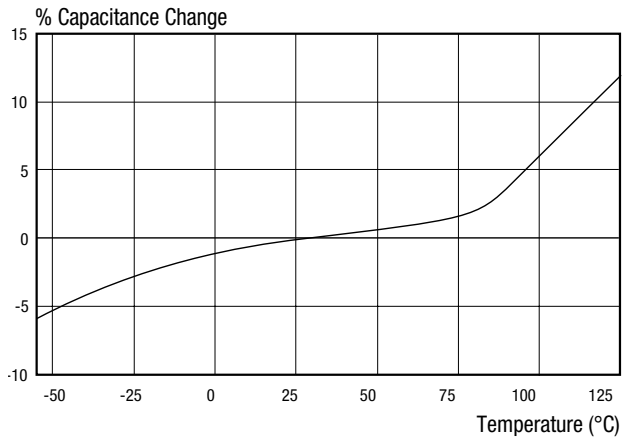


### CAPACITANCE CHANGE VS. FREQUENCY - METALIZED POLYESTER

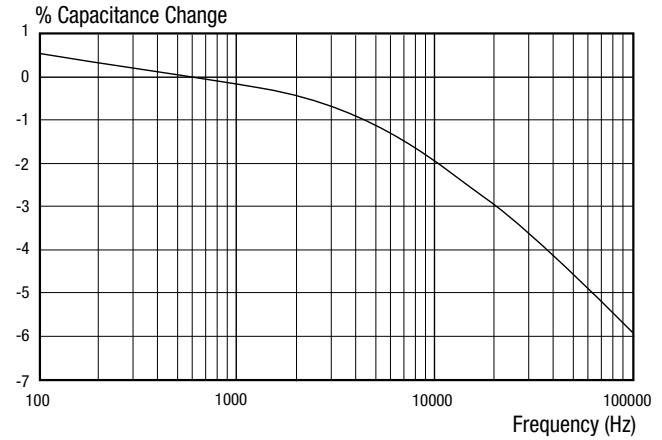


### DISSIPATION FACTOR VS. TEMPERATURE - METALIZED POLYESTER

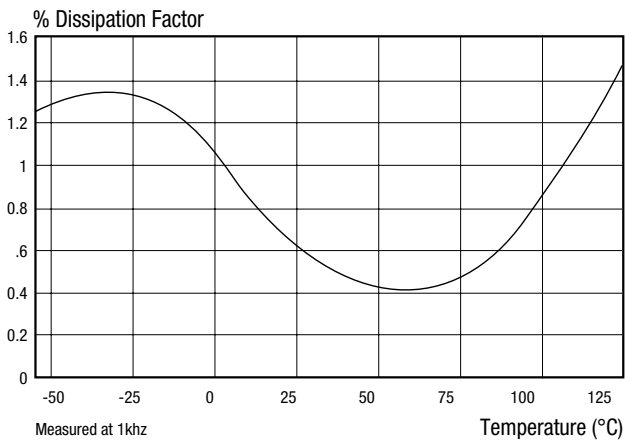

### DISSIPATION FACTOR VS. FREQUENCY - METALIZED POLYESTER

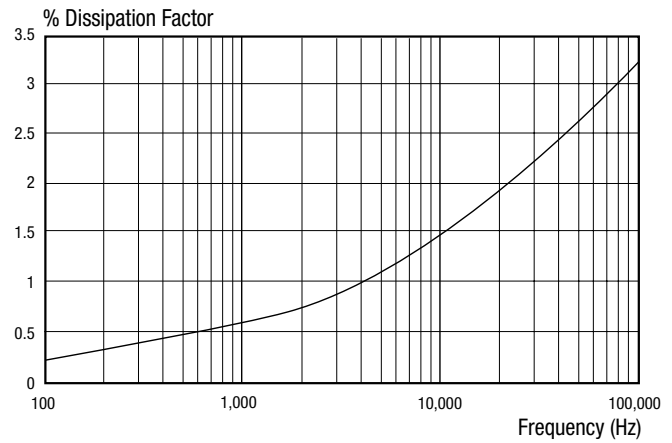


### INSULATION RESISTANCE VS. TEMPERATURE - METALIZED POLYESTER

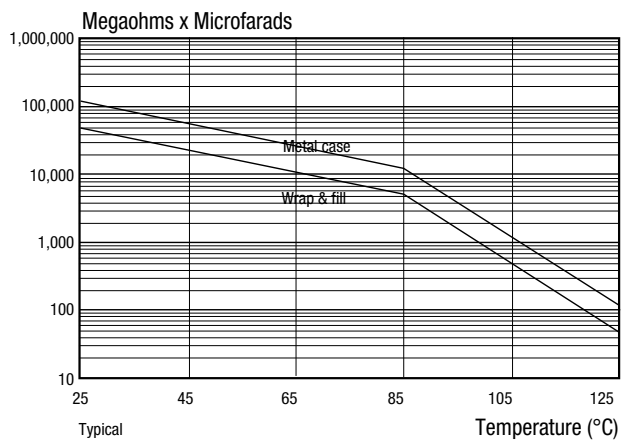


# GUIDE TO ORDERING

## SECTION GROUNDED TO CASE




### DIMENSIONS (in inches)


#### CASE STYLE 01

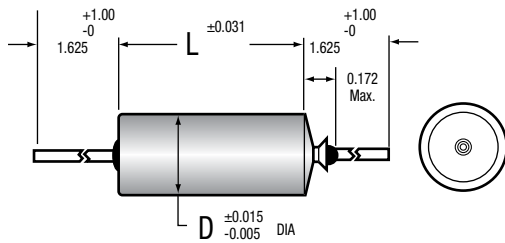


#### CASE STYLE 03

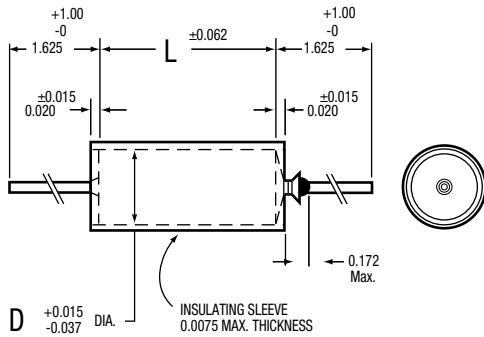

#### CASE STYLE 12

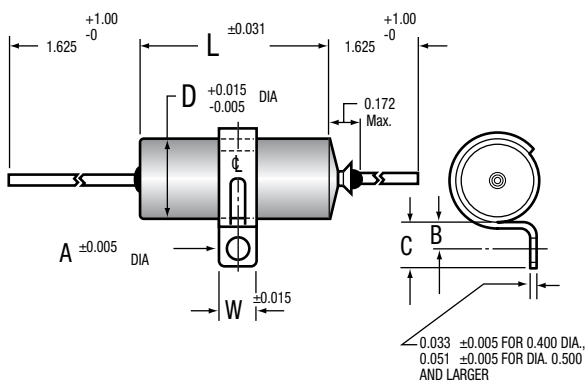


## SECTION INSULATED FROM CASE




### DIMENSIONS (in inches)


#### CASE STYLE 02

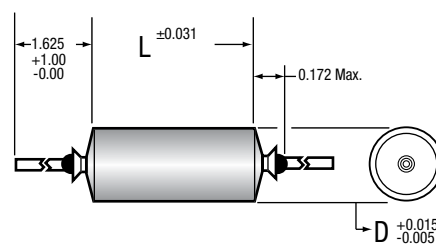

#### CASE STYLE 04

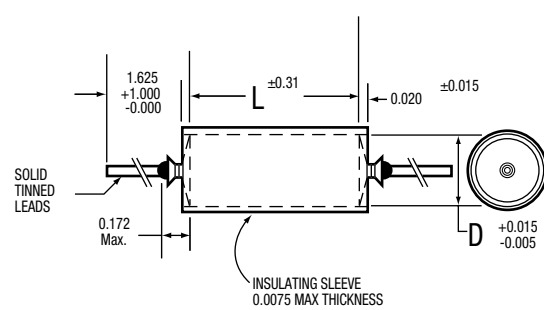

#### CASE STYLE 13

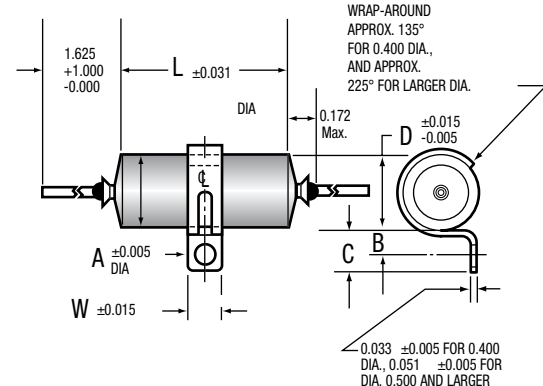

The length of grounded styles is 0.062" shorter than the length shown in tabulations in the catalog.


# GUIDE TO ORDERING

## BRACKET DIMENSIONS (Style 12 & 13 / in inches)

D	W	A	B	C
0.400	0.250	0.144	0.187±0.015	0.312±0.031
0.500	0.500	0.156	0.250±0.031	0.437±0.062
0.562	0.500	0.156	0.250±0.031	0.437±0.062
0.670	0.500	0.156	0.250±0.031	0.437±0.062
0.750	0.500	0.156	0.250±0.031	0.437±0.062
1.000	0.500	0.156	0.250±0.031	0.437±0.062

\*Based on 1 in. = 25.4 mm

## TYPICAL TAB TERMINAL DIMENSIONS

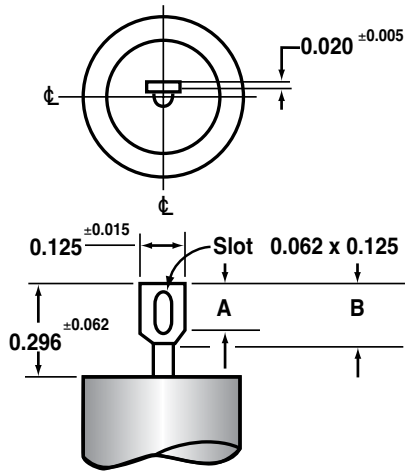

Dwg. No A-9525

A = 0.156 ± 0.015" (3.96 ± 0.38 mm)

B = 0.187 ± 0.015" (4.75 ± 0.38 mm)

Tab Terminal available only on case diameters equal to or greater than 0.400 inches.

T1 & T3 styles are supplied with one tab terminal on the insulated end and a ground lead on the opposite end.

# ORDERING TABLES

## METAL CASE

EXAMPLE:

**218P**

**223**

**X9**

**100**

**S**

**02**

### CATALOG NUMBERING SYSTEM

**Case style**

**Terminal:** S = Wire leads T = Soldering tab\*.

**DC Voltage rating:** Expressed in volts.  
See standard ratings charts for voltage code.

**Capacitance Tolerance:** X0 =  $\pm 20\%$   
X9 =  $\pm 10\%$   
X5 =  $\pm 5\%$   
X2 =  $\pm 2\%$

**Capacitance:** Expressed in picofarads, the first two digits are significant figures; the third is the number of zeros following. See standard ratings tables for capacitance code.

**Dearborn type number:** Identifies the basic capacitor.

\* Soldering tabs are available only on case diameters equal to or greater than 0.400 inches.

## WRAP AND FILL

EXAMPLE:

**430P**

**183**

**X9**

**100**

**X**

**F**

### CATALOG NUMBERING SYSTEM

**"F"** applies only to "ROHS" compliant parts.

**Terminal:** No suffix required unless specified on applicable specification sheet (Terminal style).

**DC Voltage rating:** Expressed in volts.  
See standard ratings charts for voltage code.

**Capacitance Tolerance:** X0 =  $\pm 20\%$   
X9 =  $\pm 10\%$   
X5 =  $\pm 5\%$   
X2 =  $\pm 2\%$

**Capacitance:** Expressed in picofarads, the first two digits are significant figures; the third is the number of zeros following. See standard ratings tables for capacitance code.

**Dearborn type number:** Identifies the basic capacitor.