


Advantages

Our patented Micropen® precision printing technology provides superior precision, thick-film resistors.

- Voltage Ratings to 40,000 Volts
- Resistance Values to 2 TΩ
- Ratio Tolerances to 0.1%
- TCR to 25 ppm/°C
- TCR Tracking to 5 ppm/°C
- VCR to 0.05 ppm/V
- Very Low Noise
- Ultra High Stability
- Custom Configurations

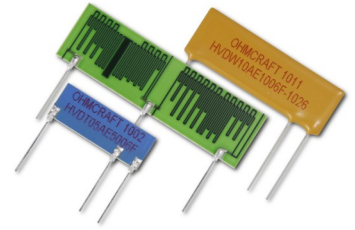

Electrical Specifications

Case Size Ratings	TCR (±ppm/°C)	Ratio Tolerance							
		0.10%	0.25%	0.50%	1%	2%	5%	10%	20%
04 500mW 4kV	25	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M
	50	100K-100M	100K-100M	100K-1G	100K-1G	100K-1G	100K-1G	100K-1G	100K-1G
	100	100K-100M	100K-100M	100K-10G	100K-10G	100K-10G	100K-50G	100K-50G	100K-50G
	200	100K-100M	100K-100M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-50G
	>200	100K-100M	100K-100M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-100G
05 1W 5kV	25	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M	1M-100M
	50	100K-100M	100K-100M	100K-1G	100K-1G	100K-1G	100K-1G	100K-1G	100K-1G
	100	100K-100M	100K-100M	100K-10G	100K-10G	100K-50G	100K-50G	100K-50G	100K-50G
	200	100K-100M	100K-100M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-50G
	>200	100K-100M	100K-100M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-100G
10 1W 10kV	25	1M-100M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M
	50	100K-100M	100K-500M	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G
	100	100K-100M	100K-500M	100K-10G	100K-50G	100K-50G	100K-50G	100K-50G	100K-50G
	200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-50G
	>200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-100G	100M-1T
20 2W 20kV	25	1M-100M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M
	50	100K-100M	100K-500M	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G
	100	100K-100M	100K-500M	100K-10G	100K-50G	100K-50G	100K-50G	100K-50G	100K-50G
	200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-50G
	>200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-100G	100M-1T
30 3W 30kV	25	1M-100M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M
	50	100K-100M	100K-500M	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G
	100	100K-100M	100K-500M	100K-10G	100K-50G	100K-50G	100K-50G	100K-50G	100K-50G
	200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-50G
	>200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-100G	100M-1T
40 6W 40kV	25	1M-100M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M	1M-500M
	50	100K-100M	100K-500M	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G	100K-10G
	100	100K-100M	100K-500M	100K-10G	100K-50G	100K-50G	100K-50G	100K-50G	100K-50G
	200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-50G	100M-50G
	>200	100K-100M	100K-500M	100M-10G	100M-50G	100M-50G	100M-50G	100M-100G	100M-1T

For custom sizes and configurations, contact ohmcraftsales@exxelia.com.


How to Order

HVD	+		+		+		+		+		+			
Type		Lead Style		Case Size		Ratio		TCR		R Total Value		Ratio Tolerance		Coating
Leaded High Voltage Divider		T Spade Terminal, 100% Tin RoHS S Spade Terminal, Sn60Pb40 solder W Wire, 22AWG 100% Tin RoHS B Wire, 22AWG Sn60Pb40 solder		04 05 10 20 30 40		A 1000:1 B 100:1 C Other		Absolute E ±25ppm/°C H ±50ppm/°C K ±100ppm/°C L ±200ppm/°C OR Tracking W ±10ppm/°C X ±15ppm/°C Y ±25ppm/°C Z ±50ppm/°C		Resistance value expressed as a four-digit number—where the first three numbers are the significant value, and the fourth number is the number of zeros.		B ±0.1% C ±0.25% D ±0.5% F ±1.0% G ±2.0% J ±5.0% K ±10% L ±20%		2 Bare 3 Powder Coating 4 Single Surface Epoxy

Absolute tolerance is 15% (> 10GΩ 20%) unless otherwise specified.
Ratio = (R1+R2)/R2
When TCR Tracking is specified, the typical Absolute TCR is 100ppm/°C.



Resistor Dimensions

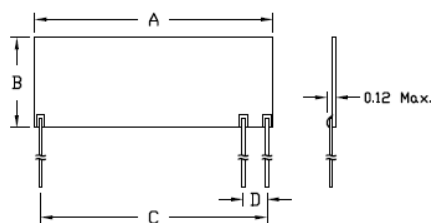

Wire Leads: 22AWG (0.025"),
1.3" typical length.

Spade Leads: 0.01" thick, 0.02" wide, 0.325" minimum length, standoff 0.06" max.

Case Size	A (Length)	B (Height)	C (Nominal)	D (Nominal)	Units
04	0.5 +0.08/-0.03 12.7 +2.03/-0.76	0.375 ±0.03 9.53 ±0.76	0.4 10.16	0.2 5.08	inches mm
05	1.0 +0.08/-0.03 25.4 +2.03/-0.76	0.375 ±0.03 9.53 ±0.76	0.9 22.86	0.2 5.08	inches mm
10	1.5 +0.08/-0.03 38.1 +2.03/-0.76	0.5 ±0.03 12.7 ±0.76	1.3 33.02	0.2 5.08	inches mm
20	2.0 +0.08/-0.03 50.8 +2.03/-0.76	0.75 ±0.03 19.05 ±0.76	1.9 48.26	0.2 5.08	inches mm
30	3.0 +0.08/-0.03 76.2 +2.03/-0.76	0.75 ±0.03 19.05 ±0.76	2.9 73.66	0.2 5.08	inches mm
40	4.0 +0.08/-0.03 101.6 +2.03/-0.76	0.75 ±0.03 19.05 ±0.76	3.9 99.06	0.2 5.08	inches mm

For custom case sizes, contact ohmcraftsales@exxelia.com.

Typical Performance Characteristics

Test	Maximum ΔR
Short Time Overload	0.1%
Load Life	0.1%
Thermal Shock	0.1%
Shock	0.05%
Vibration	0.05%
Resistance to Soldering Heat	0.05%

Parameter	Typical
Operating Temperature	-55°C to 150°C
TCR	Measured from 25°C to 75°C
Resistance Value	Value > 10M are measured at 100 VDC For custom test voltages consult factory

Material Construction

- Substrate** 96% Alumina
- Coatings** All resistors are glass encapsulated with optional single side epoxy or powder coating.

Custom Selections Available Upon Request

Please consult with our knowledgeable sales staff for help specifying custom parts to meet your needs:

E: ohmcraftsales@exxelia.com

P: 585.624.2610

www.ohmcraft.com

93 Paper Mill St.

Honeoye Falls, NY 14472

Power Derating Curve

