

MIL-STD 1553 Interface Transformers

DBIT x 7 S(A)



- In accordance to MIL-STD 1553 A & B
- Meet all the electrical requirements of Manchester II serial bi-phase data transmission, 1 MHz operation
- Epoxy molding in accordance with outgassing requirements of ECSS-Q-ST-70-02C
- Qualified EPPL
- Open-circuit impedance greater than 4 kΩ over 75 kHz to 1 MHz working frequency
- Frequency range 75 kHz to 1 MHz
- Operating temperature range: -55°C up to +150°C (for 7SA only)
- Weight: < 5 grams

Electrical Data (25°C)

ID Code	Turn ratio 1-3: 4-8	Turn ratio 1-3: 5-7	R _{DC} max (Ω) 1-3	R _{DC} max (Ω) 4-8	Primary Inductance (mH) min 75 kHz-1V	Open Circuit Impedance min (kΩ)	Operating Temperature range
DBIT 1 7S*	1,4:1	2:1	2	1,6	7 (1-3)	3	-55°C +125°C
DBIT 2 7S*	1:1	1:0,707	2	2,2	7 (1-3)	3	-55°C +125°C
DBIT 3 7S*	1,2:1	1,67:1	2	2	7 (1-3)	3	-55°C +125°C
DBIT 4 7S*	1,2:5	1,67:1	2	2	7 (1-3)	3	-55°C +125°C
DBIT 5 7S*	1,2:5	1,1,74	1	2	7 (4-8)	3	-55°C +125°C
DBIT 6 7S*	2,3:1	3,2:1	2	1	7 (1-3)	3	-55°C +125°C
DBIT 7 7S*	1,25:1	1,66:1	2	2	7 (1-3)	3	-55°C +125°C
DBIT 8 7S*	1,2,12	1:1,5	1	2,2	7 (4-8)	3	-55°C +125°C
DBIT 1 7SA	1,4:1	2:1	1,23	1,1	7 (1-3)	4	-55°C +150°C
DBIT 2 7SA	1:1	1:0,707	1,23	1,6	7 (1-3)	4	-55°C +150°C
DBIT 3 7SA	1,2:1	1,67:1	1,23	1,4	7 (1-3)	4	-55°C +150°C
DBIT 5 7SA	1,2:5	1,1,74	0,6	1,4	7 (4-8)	4	-55°C +150°C
DBIT 6 7SA	2,3:1	3,2:1	1,23	0,8	7 (1-3)	4	-55°C +150°C
DBIT 7 7SA	1,25:1	1,66:1	1,23	1,25	7 (1-3)	4	-55°C +150°C
DBIT 8 7SA	1,2,12	1:1,5	0,7	1,4	7 (4-8)	4	-55°C +150°C

* EPPL products - Detail Specifications MSP003


Notes

- Common mode rejection : 45 dB min.
- Dielectric withstanding voltage : 100 V_{RMS}.
- Insulation resistance : 1,3 - 4,8 500 V_{DC} >1000 MΩ
- Tolerance ratio ± 3 %.


To Order

DBIT	#	7	x	DBIT # 7 SA
Range	Part 1 to 8	Case height 7	x = S SMD	A
				New version


Typical Dimensions (mm)

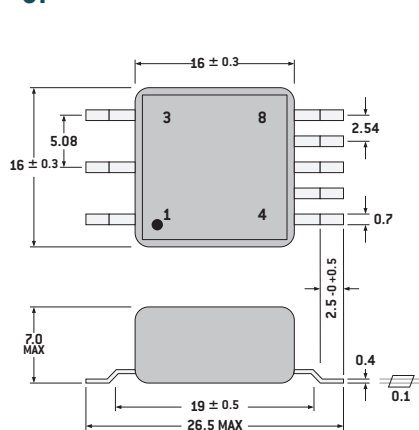

Connections



PCB Layout (suggested, DBIT x 7 S)

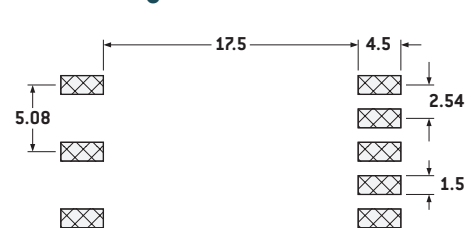

Marking



yyww:
Date code

Packaging

Individually packed: 32 parts on 2 layers.
Tape and Reel (DBIT x 7S):
300 units per reel of diameter 330 mm

